



# PROFESSIONAL PNEUMATIC TOOLS

[www.scorpiotool.com](http://www.scorpiotool.com)

**YUEH CHI ENTERPRISE CO., LTD.**





YUEH-CHI ENTERPRISE CO., LTD.

# introduction

BEST PRODUCT  
BEST QUALITY  
BEST SERVICE





YUEH CHIH ENTERPRICE CO., LTD. was founded in 1992, started from a small scale factory of producing pneumatic tools. Passed through many efforts, improvement and insistence to enhance R&D ability and expand to use advanced machines in process facilities. Nowadays, we are one of the leading manufacturer for professional pneumatic tools in Taiwan.

As gone through two decades, we want to mark year 2013 a milestone for 20th anniversary, our strong team work devoted constantly to the sophisticated technology for the innovative and 'HIGH QUALITY' air tools adopted with ISO-9001 quality assurance system and CE standard. Focus on ergonomic design in providing a comfort and easy operation tools to the users we developed the tools with less weight, high torque, powerful, durable and stable quality. We are pioneer to produce COMPOSITE impact wrench and ONE HAND OPERATION of low air consumption for green-living world models is the most successful series. Not limit to composite material we also have series of family design product to service worldwide customers and OEM/ODM requirement.

Our business is entering the 3rd decade, we have many achievements to celebrate this new era and will carry on more Pneumatic Tools development projects in the professional air tools industry. Furthermore we have constructed a new & large site of factory building in Taichung, Taiwan where to be finished by 2014 to share with all our global customers.





# contents

|                                        |    |
|----------------------------------------|----|
| Index & Conversion Factors             | 2  |
| Impact Clutch Construction             | 3  |
| Quality Announcement                   | 4  |
| Manufacturing Procedures               | 5  |
| Composite Impact Wrench                | 6  |
| Impact Wrench                          | 17 |
| Air Ratchet Wrench                     | 25 |
| Air Screw Driver                       | 26 |
| Air Drill                              | 30 |
| Air Micro Die Grinder                  | 31 |
| Air Grinder, Sander, Polisher & Others | 32 |
| Air Cutting Tools                      | 39 |
| Air Needle Scaler & Flux Chipper       | 40 |
| Air Hammer                             | 41 |
| Air Chipping Hammer                    | 42 |
| Air Concrete Breaker                   | 43 |
| Air Hydraulic Riveters                 | 44 |
| Air Grease Gun                         | 46 |
| Air Accessories                        | 47 |
| Air Impact Socket                      | 49 |
| Torque Wrench                          | 50 |
| Torque Tester                          | 51 |
| Air Compressor Hook-up                 | 52 |
| Periodic Maintenance and Inspection    | 53 |



## LENGTH

| mm                | m      | inch           | foot     |
|-------------------|--------|----------------|----------|
| 1                 | 0.001  | 0.03937        | 0.003281 |
| 1000              | 1      | 39.37          | 3.281    |
| 25.4              | 0.0254 | 1              | 0.08333  |
| 304.8             | 0.3048 | 12             | 1        |
| 1 mm=0.03937 inch |        | 1 m=39.37 inch |          |
|                   |        | 1 inch=25.4mm  |          |

## PRESSURE

| KPa   | kg/cm <sup>2</sup> | lb/inch <sup>2</sup> (P.S.I) | bar     |
|-------|--------------------|------------------------------|---------|
| 1     | 1.01020            | 0.145                        | 0.01    |
| 98.07 | 1                  | 14.22                        | 0.9807  |
| 6.895 | 0.07031            | 1                            | 0.06895 |
| 100   | 1.0197             | 14.50                        | 1       |

1 Pa=1 N/m<sup>2</sup>      1 kg/m<sup>2</sup>=14.22lb/inch<sup>2</sup>  
 1 KPa=1000Pa=0.01 bar      1 lb/inch<sup>2</sup>=0.07031 kgf/cm<sup>2</sup>

## POWER

| N                                                           | kgf    | lb(Pound) | 1 N=0.1020kgf        |
|-------------------------------------------------------------|--------|-----------|----------------------|
| 1                                                           | 0.1020 | 0.2249    | 1 kgf=9.807N=2.205lb |
| 9.807                                                       | 1      | 2.205     | 1 lb=0.4535kgf       |
| 4.447                                                       | 0.4535 | 1         |                      |
| (1N=1 kgw/m <sup>2</sup> )    1 kgw(weight)    1 kgf(force) |        |           |                      |

## TORQUE

| N-m   | kg-m   | ft-lb  |
|-------|--------|--------|
| 1     | 0.1020 | 0.7378 |
| 9.807 | 1      | 7.233  |
| 1.356 | 0.1383 | 1      |

1 N-m=0.1020kg-m      1 kg-m=7.233ft-lb  
 1 N-m=0.7378ft-lb      1 ft-lb=1.356 N-m

## WEIGHT

\* 1 lb=0.453592kg    \* 1 kg=2.20462 lb


## FLOW

\* 1 m<sup>3</sup>/h=16.6667 l/m=35.335 cfm  
 \* 1 cfm=0.471947 l/s=0.0283m<sup>3</sup>/min  
 =28.32 l/min  
 \* 1 l/s=2.1189 cfm  
 \* 1 m<sup>3</sup>/h=0.277778 l/s



# PATENTED DESIGN OF NEW PIN CLUTCH

New improvement Hammer cam protects spring against damage from hammer pin.

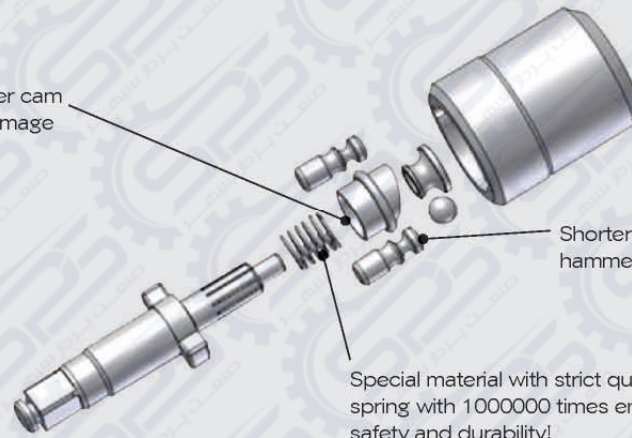

Shorter and special design of hammer pin increased tools lifetime.

Special material with strict quality control of spring with 1000000 times endurance test, safety and durability!

Smooth balance impact for operation.

## ● Pin Clutch Hammer Mechanism




Mechanism :

- Smooth balance impact for operation.
- Provided with high torque and durability.
- Low vibration and noise.
- Smooth bolt starting, excellent for use in industry assembly line applications.

Usable for Products on Impact Clutch :

1/2", 3/4"

## ● Pin Less Hammer Mechanism

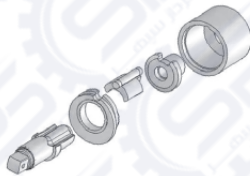

Mechanism :

- Closet hammer cage mechanism prevents breakage from hammer pin damage.
- Special extension design of hammer cam provides smooth balance impact, low vibration level and high torque level.
- Undivided hammer pin and hammer dog mechanism prevent damage of hammer pin, increased tools lifetime.
- Simple mechanism easy for tools maintenance.

Usable for Products on Impact Clutch :

1"

## ● Twin Hammer Hammer Mechanism



Mechanism :

- Two identical hammers provided with instantaneous balance blow and highest torque for blow starting.
- Durable hammer design and excellent for use in heavy-duty industrial applications.
- Simple mechanism easy for tools maintenance.

Usable for Products on Impact Clutch :

1/4", 3/8", 1/2", 3/4", 1"

## ● Rocking Dog Hammer Mechanism



Mechanism :

- Simple design hammer mechanism provided great hitting power, easy maintenance.
- Simple design recommended for medium duty industrial applications.

Usable for Products on Impact Clutch :

1/4", 3/8", 3/4", 1"





# Quality Announcement

Strict quality policy is the reason why you enjoy the convenience SCORPIO brought to you.

From strict selection and evaluation of subcontractors, practicable “facility, equipment and work environment management”, to the requirements of standardized operation and humanized management, we are scrupulous about every details for every step.

## Quality assurance procedures

- Raw material inspection
- Machinery process material inspection
- External process

“Inspect”, “determine” and “record” according to purchase order.

Determination is implemented based on inspection standards and drawings. Suppliers and approved according to ‘approval criteria for supplier’. Pass level is 80 points.




- Inspection

All of workstations of machinery process

-->body assembly (accessory assembly)

-->finished goods assembly have QC inspection control, assuring steady quality and providing sources of best innovative information for QA.

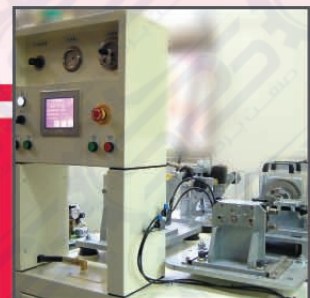

- Installation
- Assembly

Operation Standards and Quality Control Flow Chart are standardized operation basis for process, installation and assembly. Control chart and forwarding chart are source of recognition of ‘quality assurance’ and ‘innovation of product’.

- Endurance test for finished goods
- Overall test for function of finished goods.

To assure life period and reliability of products, when products are finished or processed, QA for each work procedure have ‘sampling breakage test’ and ‘full functional test’, which are ultimate declaration of ‘quality assurance’ to customers.

Each job order and QA are recorded, and carefully retraced, identified and controlled.



# Manufacturing Procedures

Standardized operation, humanized management.

During the whole production procedures, either machine operation or manual operation is based on our standardized requirements.


Every procedure has definite rules to follow. Production efficient is increased, and manmade negligence is decreased! "Quality is the outcome of manufacturing rather than inspection", all employees in "Yueh Chi" Implement these words from time to time.

## Production procedures

- Material process  
(CNC precise process, special aperture process)
- Hardness
- Carburizing
- Strength special process

Processed by high precise CNC machine, the assemblies-finished goods can achieve a reliable consistent of performances.

After special treatment, the 'life quality' of materials has a certain 'warranty period'.

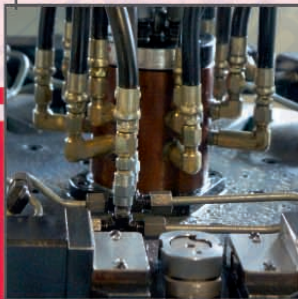

- Standardized installation and assembly
- Overall test for finished goods
- Packaging and storage

Because of above mentioned strict regulation and control of 'material treatment' and 'appropriate surface treatment', elaborate packing design, and standardized control of 'overall test of reliability of finished goods' after they are finished, the 'overall qualities' of standardized installation and assembly have an 'innovative' design basis of steady performance, beautiful appearance, and easy use.



- Precise grinding
- Polishing
- Electric painting
- De-impurity operation

After appropriate surface treatment, the durability and lifetime of parts and components are assured, and their appearance and touch feels are quite comfort and safe.







- ▶ High strength aluminum alloy with undivided unit of high performance motor system delivers highest torque and durability.
- ▶ PATENTED design Composite and aluminum components provide with lightweight, durability, cold-resistant and pleasing to the eye.
- ▶ Alloy Steel anvil with special heat treatment for high durability.
- ▶ Alloy Steel twin hammer clutch system for smooth operation and durability.
- ▶ Teasing trigger provides great control and operator comfort.
- ▶ Handle Exhaust directs the air away from operator and work piece.



- ▶ Integrated power regulator with easy control dial with 3 speed of Forward and 2 speed of Reversed operation.
- ▶ Contoured elastomer handle grip for improved comfort and ergonomics.

Work Longer with less weight fatigue!  
Get Into tight areas with high power performance!

**1/2" Impact**

# INNOVATION



- ▶ Max Torque : 320 Ft.lb.
- ▶ Net Weight : 2.3 kgs



- ▶ Max Torque : 400 Ft.lb.
- ▶ Net Weight : 2.6 kgs



**YU-1281T**

*New*

- ▶ Max Torque : 1000 Ft.lb.
- ▶ Net Weight : 2.02 kgs





YU-2583T6 | YU-2583T

# PROFESSIONAL

## 1" COMPOSITE IMPACT WRENCH

Work longer with less weight fatigue!

Get Into tight areas with high power performance!

Super heavy duty for all automotive service, body shop, farm, track work etc . . . . .



- Durable Hammer Housing
- Durable Twin Hammer Mechanism
- Humanized Special Changeable Supports Handle For Left-hander Purpose.
- Unique Composite Motor Housing
- Inside or Outside Trigger With 2 Speed Control
- Elastomer Composite Handle Grip
- Setting with 3 Forward and 3 Reverse Speed
- Two Way Changeable Air Inlet Direction For Comfort Workplace.

### Features:





professional

# Composite impact wrench



YU-0983T 3/8"  
YU-0984T 1/2" Mini



YU-1282T 1/2"



YU-1932T 3/4" Mini



PW-1281T  
1/2" Twin Hammer



PW-1982T  
3/4" Twin Hammer



PW-1284T  
1/2" Twin Hammer



PW-1284T-A  
1/2" Twin Hammer



YU-0981T  
3/8" IMPACT



YU-0982T  
1/2" MINI IMPACT



YU-1281T  
1/2" IMPACT



YU-1281P  
1/2" IMPACT



YU-2581T  
1" IMPACT



YU-1982T  
3/4" IMPACT



YU-1930T  
3/4" MINI IMPACT





High Power  
Light Weight  
Lower Air Consumption  
Energy Saving for Green Living World



YU-0985T

# STUBBY



R F  
Reverse / Forward  
Control



One hand switching for  
3 speeds forward  
power and always  
use maximum  
output power for  
reverse.



Extrusion edging  
strip of motor  
housing protection  
& decoration.



**Energy Saving**  
Lower air consumption



**Ergonomic**  
One hand push button  
forward/reverse mechanism



**High Power**  
450 ft.lb (610N.m)  
efficient power level



**Stubby**  
122mm length, Compact  
design for hard to reach areas



**Light weight**  
1.3 kgs,  
composite design

Composite PREMIUM IND Impact Wrench, twin hammer



YU-0985T 1/2"



YU-0987T 1/2"



YU-1285T 1/2"



YU-1285TH 1/2"



YU-1985T 3/4"

## ONE HAND OPERATION



# Composite Impact Wrench One Hand Operation

Low Air Consumption, Short and small length for easy to get into narrow space

## YU-0985T

Stubby 1/2" Twin Hammer

- Handle exhaust
- Forward: 3 Speed
- Reverse: 1 Speed

|                                                                                   |                 |                             |
|-----------------------------------------------------------------------------------|-----------------|-----------------------------|
|  | Square Drive    | 1/2"                        |
|  | Bolt Capacity   | 13 mm                       |
|  | Max Torque      | 450 FT-LB (62KG-M, 610 N-M) |
|  | Free Speed      | 9,000 R.P.M.                |
|  | Air Consumption | 4.2 CFM                     |
|  | Air Inlet       | 1/4"                        |
|  | Air Pressure    | 90 PSI                      |
|  | Overall Length  | 122 mm                      |
|  | Net Weight      | 1.3 kg                      |
|  | Air Hose        | 10 mm                       |
|                                                                                   | *PACKING        | 10PCS/CTN/13kg/14kg/1'      |



## YU-0987T

Stubby 1/2" Twin Hammer

- Handle exhaust
- Forward: 3 Speed
- Reverse: 1 Speed

|                                                                                     |                 |                             |
|-------------------------------------------------------------------------------------|-----------------|-----------------------------|
|  | Square Drive    | 1/2"                        |
|  | Bolt Capacity   | 5/8" (16mm)                 |
|  | Max Torque      | 550 FT-LB (76KG-M, 746 N-M) |
|  | Free Speed      | 7,000 R.P.M.                |
|  | Air Consumption | 4.37 CFM                    |
|  | Air Inlet       | 1/4"                        |
|  | Air Pressure    | 90 PSI                      |
|  | Overall Length  | 148 mm                      |
|  | Net Weight      | 1.6 kg                      |
|  | Air Hose        | 10 mm                       |
|                                                                                     | *PACKING        | 10PCS/CTN/16kg/17kg/1.5'    |



OPTION



YU-0987TK

## YU-0985TK / YU-0987TK

14pcs Set 1/2" Impact Wrench Kit

|           |                                                     |
|-----------|-----------------------------------------------------|
| Contents: |                                                     |
| 1PC       | YU-0985T / YU-0987T                                 |
| 9PCS      | Mini Sockets (CR-V)<br>13,14,15,16,17,18,19,21,24mm |
| 1PC       | 75mm Extension Bar                                  |
| 1PC       | Oil Pot                                             |
| 1PC       | Nipple                                              |
| 1PC       | Plastic Case                                        |
| *PACKING  | 5Sets/CTN/13.5kg/14.5kg/1.3'                        |



OPTION



YU-0987TK2

## YU-0985TK2 / YU-0987TK2

17pcs Set 1/2" Impact Wrench Kit

|           |                                                            |
|-----------|------------------------------------------------------------|
| Contents: |                                                            |
| 1PC       | YU-0985T / YU-0987T                                        |
| 9PCS      | Mini Sockets (CR-V)<br>13,14,15,16,17,18,19,21,24mm        |
| 3PCS      | Thin Wall Impact Sockets<br>17,19,21mm (Chrome-Molybdenum) |
| 1PC       | 75mm Extension Bar                                         |
| 1PC       | Oil Pot                                                    |
| 1PC       | Nipple                                                     |
| 1PC       | Plastic Case                                               |
| *PACKING  | 5Sets/CTN/17kg/18kg/1.3'                                   |



OPTION



YU-0987TK3

## YU-0985TK3 / YU-0987TK3

8pcs Set 1/2" Impact Wrench Kit

|           |                                                            |
|-----------|------------------------------------------------------------|
| Contents: |                                                            |
| 1PC       | YU-0985T / YU-0987T                                        |
| 3PCS      | Thin Wall Impact Sockets<br>17,19,21mm (Chrome-Molybdenum) |
| 1PC       | 75mm Extension Bar                                         |
| 1PC       | Oil Pot                                                    |
| 1PC       | Nipple                                                     |
| 1PC       | Plastic Case                                               |
| *PACKING  | 5Sets/CTN/13.5kg/14.5kg/1.3'                               |



High Power  
Light Weight  
Lower Air Consumption  
Energy Saving for Green Living World



# Composite Impact Wrench One Hand Operation

Low Air Consumption, Short and small length for easy to get into narrow space

## YU-1285T

### 1/2" Twin Hammer

- Handle exhaust
- Forward: 3 Speed
- Reverse: 1 Speed

|                                                                                   |                 |                               |
|-----------------------------------------------------------------------------------|-----------------|-------------------------------|
|  | Square Drive    | 1/2"                          |
|  | Bolt Capacity   | 16 mm                         |
|  | Max Torque      | 900 FT-LB (125KG-M, 1220 N-M) |
|  | Free Speed      | 6,500 R.P.M.                  |
|  | Air Consumption | 4.8 CFM                       |
|  | Air Inlet       | 1/4"                          |
|  | Air Pressure    | 90 PSI                        |
|  | Overall Length  | 165 mm                        |
|  | Net Weight      | 2.02 kg                       |
|  | Air Hose        | 10 mm                         |
| *PACKING                                                                          |                 | 10PCS/CTN/20.2kg/21.2kg/1.5'  |



## YU-1285TH

### Heavy Duty 1/2" Twin Hammer

- Handle exhaust
- Forward: 3 Speed
- Reverse: 1 Speed

|                                                                                     |                 |                                |
|-------------------------------------------------------------------------------------|-----------------|--------------------------------|
|  | Square Drive    | 1/2"                           |
|  | Bolt Capacity   | 16 mm                          |
|  | Max Torque      | 1100 FT-LB (152KG-M, 1492 N-M) |
|  | Free Speed      | 5,000 R.P.M.                   |
|  | Air Consumption | 4.9 CFM                        |
|  | Air Inlet       | 1/4"                           |
|  | Air Pressure    | 90 PSI                         |
|  | Overall Length  | 186 mm                         |
|  | Net Weight      | 2.4 kg                         |
|  | Air Hose        | 10 mm                          |
| *PACKING                                                                            |                 | 10PCS/CTN/24kg/25kg/1.8'       |



## YU-1985T

### Light Weight 3/4" Twin Hammer

- Handle exhaust
- Forward: 3 Speed
- Reverse: 1 Speed

|                                                                                     |                 |                                |
|-------------------------------------------------------------------------------------|-----------------|--------------------------------|
|  | Square Drive    | 3/4"                           |
|  | Bolt Capacity   | 26 mm                          |
|  | Max Torque      | 1100 FT-LB (152KG-M, 1492 N-M) |
|  | Free Speed      | 5,000 R.P.M.                   |
|  | Air Consumption | 4.9 CFM                        |
|  | Air Inlet       | 1/4"                           |
|  | Air Pressure    | 90 PSI                         |
|  | Overall Length  | 191 mm                         |
|  | Net Weight      | 2.6 kg                         |
|  | Air Hose        | 10 mm                          |
| *PACKING                                                                            |                 | 10PCS/CTN/26kg/27kg/1.8'       |



### OPTION



### YU-1285THK

## YU-1285TK/YU-1285THK

### 17pcs Set 1/2" Impact Wrench Kit

#### Contents:

|          |                                                                            |
|----------|----------------------------------------------------------------------------|
| 1PC      | YU-1285T/YU-1285TH                                                         |
| 10PCS    | Air Sockets (Chrome-Molybdenum)<br>9, 10, 11, 13, 14, 17, 19, 22, 24, 27mm |
| 1PC      | 5" Extension Bar                                                           |
| 1PC      | Oil Pot                                                                    |
| 1PC      | 4mm Hex Wrench                                                             |
| 1PC      | Nipple                                                                     |
| 1PC      | Plastic Case                                                               |
| 1PC      | Mini Oiler                                                                 |
| *PACKING | 5Sets/CTN/20.2kg/21.2kg/1.6'                                               |



### OPTION



### YU-1285THK2

## YU-1285TK2 / YU-1285THK2

### 12pcs Set 1/2" Impact Wrench Kit

#### Contents:

|          |                                                                                           |
|----------|-------------------------------------------------------------------------------------------|
| 1PC      | YU-1285T / YU-1285TH                                                                      |
| 6PCS     | Air Deep Sockets (Chrome-Molybdenum)<br>17, 19, 21mm with Plastic Sleeves<br>22, 23, 24mm |
| 1PC      | Oil Pot                                                                                   |
| 1PC      | 4mm Hex Wrench                                                                            |
| 1PC      | Nipple                                                                                    |
| 1PC      | Plastic Case                                                                              |
| 1PC      | Mini Oiler                                                                                |
| *PACKING | 5Sets/CTN/21.5kg/22.5kg/1.6'                                                              |



High Power  
Light Weight  
Lower Air Consumption  
Energy Saving for Green Living World



# 3/8" & 1/2" Mini Composite Impact Wrench

Light weight and high torque excellent for use in industrial applications

## YU-0981T

### 3/8" Twin Hammer

- Handle exhaust
- Forward: 3 Speed
- Reverse: 3 Speed

|                                                                                   |                 |                          |
|-----------------------------------------------------------------------------------|-----------------|--------------------------|
|  | Square Drive    | 3/8"                     |
|  | Bolt Capacity   | 1/2"(13mm)               |
|  | Max Torque      | 280FT-LB(39KG-M, 380N-M) |
|  | Free Speed      | 10000R.P.M.              |
|  | Air Consumption | 3.7 CFM                  |
|  | Air Inlet       | 1/4"                     |
|  | Air Pressure    | 90 PSI                   |
|  | Overall Length  | 170 mm                   |
|  | Net Weight      | 1.2 kg                   |
|  | Air Hose        | 10 mm                    |
|                                                                                   | *PACKING        | 10PCS/CTN/12kg/13kg/1'   |



## YU-0982T

### 1/2" Mini Twin Hammer

- Handle exhaust
- Forward: 3 Speed
- Reverse: 3 Speed

|                                                                                     |                 |                          |
|-------------------------------------------------------------------------------------|-----------------|--------------------------|
|  | Square Drive    | 1/2"                     |
|  | Bolt Capacity   | 1/2"(13mm)               |
|  | Max Torque      | 320FT-LB(44KG-M, 434N-M) |
|  | Free Speed      | 10000R.P.M.              |
|  | Air Consumption | 3.7 CFM                  |
|  | Air Inlet       | 1/4"                     |
|  | Air Pressure    | 90 PSI                   |
|  | Overall Length  | 170 mm                   |
|  | Net Weight      | 1.2 kg                   |
|  | Air Hose        | 10 mm                    |
|                                                                                     | *PACKING        | 10PCS/CTN/12kg/13kg/1'   |



## YU-0983T

### 3/8" Twin Hammer

|                                                                                     |                 |                          |
|-------------------------------------------------------------------------------------|-----------------|--------------------------|
|  | Square Drive    | 3/8"                     |
|  | Bolt Capacity   | 1/2"(13mm)               |
|  | Max Torque      | 330FT-LB(46KG-M, 450N-M) |
|  | Free Speed      | 10,000 R.P.M.            |
|  | Air Consumption | 5 CFM                    |
|  | Air Inlet       | 1/4"                     |
|  | Air Pressure    | 90 PSI                   |
|  | Overall Length  | 170 mm                   |
|  | Net Weight      | 1.3kg                    |
|  | Air Hose        | 10 mm                    |
|                                                                                     | *PACKING        | 10PCS/CTN/14kg/15kg/1'   |



## YU-0984T

### 1/2" Mini Twin Hammer

|                                                                                     |                 |                          |
|-------------------------------------------------------------------------------------|-----------------|--------------------------|
|  | Square Drive    | 1/2"                     |
|  | Bolt Capacity   | 5/8"(16 mm)              |
|  | Max Torque      | 420FT-LB(58KG-M, 570N-M) |
|  | Free Speed      | 10,000 R.P.M.            |
|  | Air Consumption | 5 CFM                    |
|  | Air Inlet       | 1/4"                     |
|  | Air Pressure    | 90 PSI                   |
|  | Overall Length  | 170 mm                   |
|  | Net Weight      | 1.4 kg                   |
|  | Air Hose        | 10 mm                    |
|                                                                                     | *PACKING        | 10PCS/CTN/14kg/15kg/1'   |



## YU-0981TK YU-0983TK

### 19Pcs Set 3/8"

### Composite Impact Wrench Kit

#### Contents:

|          |                                                                   |
|----------|-------------------------------------------------------------------|
| 1PC      | YU-0981T / YU-0983T                                               |
| 10PCS    | Air Sockets (Chrome-Molybdenum)<br>8,10,11,12,13,14,16,17,19,21mm |
| 4PC      | Deep Air Sockets 8, 10, 12, 14mm                                  |
| 1PC      | Nipple                                                            |
| 1PC      | 4mm Hex Wrench                                                    |
| 1PC      | 75mm Extension Bar                                                |
| 1PC      | Plastic case                                                      |
| *PACKING | 5Sets/CTN/16kg/17kg/1.3'                                          |



#### OPTION



#### YU-0983TK

## YU-0982TK YU-0984TK

### 17Pcs Set 1/2" Mini

### Composite Impact Wrench Kit

#### Contents:

|          |                                                      |
|----------|------------------------------------------------------|
| 1PC      | YU-0982T / YU-0984T                                  |
| 10PCS    | Air Sockets (CR-V)<br>9,10,11,13,14,17,19,22,24,27mm |
| 1PC      | 5"Extension Bar                                      |
| 1PC      | Oil Pot                                              |
| 1PC      | 4mm Hex Wrench                                       |
| 1PC      | Nipple                                               |
| 1PC      | Plastic case                                         |
| 1PC      | Mini Oiler                                           |
| *PACKING | 5Sets/CTN/16kg/17kg/1.3'                             |



#### OPTION



#### YU-0984TK

## YU-0982TK3 YU-0984TK3

### 9Pcs Set 1/2" Mini

### Composite Impact Wrench Kit

#### Contents:

|          |                                                               |
|----------|---------------------------------------------------------------|
| 1PC      | YU-0982T / YU-0984T                                           |
| 3PCS     | Thin Wall Impact Sockets<br>17, 19, 21 mm (Chrome-Molybdenum) |
| 1PC      | 4mm Hex Wrench                                                |
| 1PC      | Oil Pot                                                       |
| 1PC      | Mini Oiler                                                    |
| 1PC      | Nipple                                                        |
| 1PC      | Plastic case                                                  |
| *PACKING | 5Sets/CTN/16kg/17kg/1.3'                                      |



#### OPTION



#### YU-0984TK3



# 1/2" Composite Impact Wrench

Light weight and high torque excellent for use in industrial applications

## YU-1281P

1/2" New Pin Clutch

## YU-1281P2

1/2" New Pin Clutch 2" ANVIL

- Handle exhaust
- Forward: 3 Speed
- Reverse: 2 Speed

|                                                                                   |                 |                                                                  |
|-----------------------------------------------------------------------------------|-----------------|------------------------------------------------------------------|
|  | Square Drive    | 1/2"                                                             |
|  | Bolt Capacity   | 5/8"(16 mm)                                                      |
|  | Max Torque      | 900FT-LB(124KG-M, 1200N-M)                                       |
|  | Free Speed      | 10000R.P.M.                                                      |
|  | Air Consumption | 5.4 CFM                                                          |
|  | Air Inlet       | 1/4"                                                             |
|  | Air Pressure    | 90 PSI                                                           |
|  | Overall Length  | 208 mm (2") : 246 mm                                             |
|  | Net Weight      | 2.06 kg (2") : 2.16 kg                                           |
|  | Air Hose        | 10 mm                                                            |
|                                                                                   | *PACKING        | 10PCS/CTN/20.6kg/21.6kg/1.4'<br>(2")10PCS/CTN/21.6kg/22.6kg/1.4' |



## YU-1281T

1/2" Twin Hammer

## YU-1281T2

1/2" Twin Hammer 2" ANVIL

- Handle exhaust
- Forward: 3 Speed
- Reverse: 2 Speed

|                                                                                     |                 |                                                                  |
|-------------------------------------------------------------------------------------|-----------------|------------------------------------------------------------------|
|  | Square Drive    | 1/2"                                                             |
|  | Bolt Capacity   | 5/8"(16mm)                                                       |
|  | Max Torque      | 1000FT-LB(138KG-M, 1356N-M)                                      |
|  | Free Speed      | 10000R.P.M.                                                      |
|  | Air Consumption | 5.4 CFM                                                          |
|  | Air Inlet       | 1/4"                                                             |
|  | Air Pressure    | 90 PSI                                                           |
|  | Overall Length  | 193mm (2") : 245 mm                                              |
|  | Net Weight      | 2.02 kg (2") : 2.12 kg                                           |
|  | Air Hose        | 10 mm                                                            |
|                                                                                     | *PACKING        | 10PCS/CTN/20.2kg/21.2kg/1.4'<br>(2")10PCS/CTN/21.2kg/22.2kg/1.4' |



## YU-1282T

1/2" Twin Hammer

## YU-1281T2

1/2" Twin Hammer 2" ANVIL

|                                                                                     |                 |                                                                  |
|-------------------------------------------------------------------------------------|-----------------|------------------------------------------------------------------|
|  | Square Drive    | 1/2"                                                             |
|  | Bolt Capacity   | 5/8" (16mm)                                                      |
|  | Max Torque      | 1000 FT-LB (138KG-M, 1356 N-M)                                   |
|  | Free Speed      | 10,000 R.P.M.                                                    |
|  | Air Consumption | 5.4 CFM                                                          |
|  | Air Inlet       | 1/4"                                                             |
|  | Air Pressure    | 90 PSI                                                           |
|  | Overall Length  | 192 mm                                                           |
|  | Net Weight      | 2.05 kg                                                          |
|  | Air Hose        | 10 mm                                                            |
|                                                                                     | *PACKING        | 10PCS/CTN/20.5kg/21.5kg/1.4'<br>(2")10PCS/CTN/21.5kg/22.5kg/1.4' |



## YU-1281TK

## YU-1281PK

## YU-1282TK

OPTION



YU-1281PK



YU-1282TK

### 17pcs 1/2" Impact Wrench Kit

Contents:

|          |                                                                   |
|----------|-------------------------------------------------------------------|
| 1PC      | YU-1281T / YU-1281P / YU-1282T                                    |
| 10PCS    | Air Sockets (Chrome-Molybdenum)<br>9,10,11,13,14,17,19,22,24,27mm |
| 1PC      | 5"Extension Bar                                                   |
| 1PC      | Oil Pot                                                           |
| 1PC      | 4mm Hex Wrench                                                    |
| 1PC      | Nipple                                                            |
| 1PC      | Plastic Case                                                      |
| 1PC      | Mini Oiler                                                        |
| *PACKING | 5 Sets/CTN/20kg/21kg/1.6'                                         |

## YU-1281TK2

## YU-1281PK2

## YU-1282TK2

OPTION



YU-1281PK2



YU-1282TK2

### 12pcs 1/2" Impact Wrench Kit

Contents:

|          |                                                                                       |
|----------|---------------------------------------------------------------------------------------|
| 1PC      | YU-1281T / YU-1281P / YU-1282T                                                        |
| 6 PCS    | Air Deep Sockets (Chrome-Molybdenum)<br>17,19,21mm with Plastic Sleeves<br>22,23,24mm |
| 1PC      | Oil Pot                                                                               |
| 1PC      | 4mm Hex Wrench                                                                        |
| 1PC      | Nipple                                                                                |
| 1PC      | Plastic Case                                                                          |
| 1PC      | Mini Oiler                                                                            |
| *PACKING | 5 Sets/CTN/21.5kg/22.5kg/1.6'                                                         |



# 3/4" Composite Impact Wrench €

Light weight and high torque excellent for use in industrial applications

## YU-1930T

3/4" Mini Twin Hammer

## YU-1930T6

3/4" Mini Twin Hammer 6"ANVIL

- Handle exhaust
- Forward: 3 Speed
- Reverse: 2 Speed



|  |                 |                                                         |
|--|-----------------|---------------------------------------------------------|
|  | Square Drive    | 3/4"                                                    |
|  | Bolt Capacity   | 1"(26 mm)                                               |
|  | Max Torque      | 1000FT-LB(138KG-M, 1356N-M)                             |
|  | Free Speed      | 9000R.P.M.                                              |
|  | Air Consumption | 5.4 CFM                                                 |
|  | Air Inlet       | 1/4"                                                    |
|  | Air Pressure    | 90 PSI                                                  |
|  | Overall Length  | 200 mm (6") : 353 mm                                    |
|  | Net Weight      | 2.2 kg (6") : 2.64 kg                                   |
|  | Air Hose        | 10 mm                                                   |
|  | *PACKING        | 10PCS/CTN/22kg/23kg/1.4'<br>(6")8PCS/CTN/21kg/22kg/1.9' |

## YU-1982T

3/4" Twin Hammer

## YU-1982T6

3/4" Twin Hammer 6"ANVIL

- Handle exhaust
- Forward: 3 Speed
- Reverse: 3 Speed



|  |                 |                                                                |
|--|-----------------|----------------------------------------------------------------|
|  | Square Drive    | 3/4"                                                           |
|  | Bolt Capacity   | 1 1/8"(28mm)                                                   |
|  | Max Torque      | 1200FT-LB(165KG-M, 1630N-M)                                    |
|  | Free Speed      | 5500R.P.M.                                                     |
|  | Air Consumption | 7 CFM                                                          |
|  | Air Inlet       | 3/8"                                                           |
|  | Air Pressure    | 90 PSI                                                         |
|  | Overall Length  | 221mm (6") : 370 mm                                            |
|  | Net Weight      | 3.6 kg (6") : 4.2kg                                            |
|  | Air Hose        | 13 mm                                                          |
|  | *PACKING        | 6PCS/CTN/21.6kg/22.6kg/1.5'<br>(6")4PCS/CTN/16.8kg/17.8kg/1.6' |

## YU-1932T

3/4" Mini Twin Hammer

## YU-1932T6

3/4" Mini Twin Hammer 6"ANVIL



|  |                 |                                                         |
|--|-----------------|---------------------------------------------------------|
|  | Square Drive    | 3/4"                                                    |
|  | Bolt Capacity   | 1" (26mm)                                               |
|  | Max Torque      | 1000 FT-LB(138KG-M, 1356 NM)                            |
|  | Free Speed      | 9,000 R.P.M.                                            |
|  | Air Consumption | 5.4 CFM                                                 |
|  | Air Inlet       | 1/4"                                                    |
|  | Air Pressure    | 90 PSI                                                  |
|  | Overall Length  | 204 mm (6") : 357 mm                                    |
|  | Net Weight      | 2.22 kg (6") : 2.64 kg                                  |
|  | Air Hose        | 10 mm                                                   |
|  | *PACKING        | 10PCS/CTN/22kg/23kg/1.4'<br>(6")8PCS/CTN/21kg/22kg/1.9' |



## YU-1982TK

14Pcs Set 3/4" Impact Wrench Kit

Contents:

|          |                                                  |
|----------|--------------------------------------------------|
| 1PC      | YU-1982T                                         |
| 8PCS     | Air Sockets (CR-MO)<br>26,27,29,30,32,35,36,38mm |
| 1PC      | Oil Pot                                          |
| 1PC      | 4mm Hex Wrench                                   |
| 1PC      | 5mm Hex Wrench                                   |
| 1PC      | Nipple                                           |
| 1PC      | Plastic Case                                     |
| *PACKING | 3Sets/CTN/21.5kg/22.5kg/1.6'                     |



# 1" Composite Impact Wrench €

Light weight and high torque excellent for use in industrial applications

## YU-2581T

1" Twin Hammer

## YU-2581T6

1" Twin Hammer 6"ANVIL



OPTION

- Handle exhaust
- Forward: 3 Speed
- Reverse: 3 Speed

**Light Weight!** 5.1kg  
**High Torque!** 1500FT.LB

|          |                 |                                                           |
|----------|-----------------|-----------------------------------------------------------|
|          | Square Drive    | 1"                                                        |
|          | Bolt Capacity   | 1-5/8"(41mm)                                              |
|          | Max Torque      | 1500FT-LB(207KG-M, 2034N-M)                               |
|          | Free Speed      | 5300R.P.M.                                                |
|          | Air Consumption | 7 CFM                                                     |
|          | Air Inlet       | 3/8"                                                      |
|          | Air Pressure    | 90 PSI                                                    |
|          | Overall Length  | 256 mm (6") : 395mm                                       |
|          | Net Weight      | 5.1 kg (6") : 5.83kg                                      |
|          | Air Hose        | 13 mm                                                     |
| *PACKING |                 | 5 pcs/CTN/25.5kg/26.5kg/1.6' (6")4 pcs/CTN/24kg/25kg/2.2' |

- Changeable support handle direction for improved comfort workplace



## YU-2583T6

1" Twin Hammer 6"ANVIL

## YU-2583T

1" Twin Hammer 2"ANVIL



|          |                      |                                                                            |
|----------|----------------------|----------------------------------------------------------------------------|
|          | Square Drive         | 1"                                                                         |
|          | Bolt Capacity        | 1 3/4" (45mm)                                                              |
|          | Max Torque           | 2000FT-LB(290KG-M, 2800N-M)                                                |
|          | Working Torque       | 1800-2000 FT.LB.(2400-2700 N.m)                                            |
|          | Free Speed           | 4800R.P.M.                                                                 |
|          | Air Consumption      | 9 CFM                                                                      |
|          | Sound Pressure Level | 93.6 dB(A)                                                                 |
|          | Sound Power Level    | 104.6 dB(A)                                                                |
|          | Vibration Level      | 5 m/s <sup>2</sup>                                                         |
|          | Air Inlet            | 1/2"                                                                       |
|          | Air Pressure         | 90PSI                                                                      |
|          | Overall Length       | 550mm (2") : 420mm                                                         |
|          | Net Weight           | 8 kg (2") : 7.2 kg                                                         |
|          | Air Hose             | 13mm                                                                       |
| *PACKING |                      | 1PC/Brown Plain Box/8.3kg/10kg/1' 1PC/Color Box,2PC/CTN/16.6kg/20.4kg/2.4' |

**Light Weight!** 8kg  
**High Torque!** 2000FT.LB

- Forward : 3 Speed Reverse : 3 Speed
- Durable Hammer Housing
- Inside or Outside Trigger With 2 Speed Control
- Two Way Changeable Air Inlet Direction For Comfort Workplace.
- Humanized Special Changeable Supports Handle For Left-hander Purpose.





# Composite Impact Wrench

Light weight and high torque excellent for use in Professional applications

## PW-1281T 1/2" Twin Hammer

- Handle exhaust
- Forward: 3 Speed Reverse: 1 Speed

|                                                                                   |                 |                          |
|-----------------------------------------------------------------------------------|-----------------|--------------------------|
|  | Square Drive    | 1/2"                     |
|  | Bolt Capacity   | 5/8" (16 mm)             |
|  | Max Torque      | 700 FT-LB (949 N-M)      |
|  | Working Torque  | 580 FT-LB (786 N-M)      |
|  | Free Speed      | 7,500 R.P.M.             |
|  | Air Consumption | 4.7 CFM                  |
|  | Air Inlet       | 1/4"                     |
|  | Air Pressure    | 90 PSI                   |
|  | Overall Length  | 193 mm                   |
|  | Net Weight      | 2.04 kg                  |
|  | Air Hose        | 10 mm                    |
| *PACKING                                                                          |                 | 10PCS/CTN/22kg/23kg/1.4' |



## PW-1283T 1/2" Twin Hammer

- Handle exhaust
- Forward: 3 Speed Reverse: 1 Speed

|                                                                                     |                 |                          |
|-------------------------------------------------------------------------------------|-----------------|--------------------------|
|    | Square Drive    | 1/2"                     |
|    | Bolt Capacity   | 5/8" (16 mm)             |
|   | Max Torque      | 580 FT-LB (787 N-M)      |
|  | Working Torque  | 500 FT-LB (678 N-M)      |
|  | Free Speed      | 9,000 R.P.M.             |
|  | Air Consumption | 5.46 CFM                 |
|  | Air Inlet       | 1/4"                     |
|  | Air Pressure    | 90 PSI                   |
|  | Overall Length  | 195 mm                   |
|  | Net Weight      | 1.95 kg                  |
|  | Air Hose        | 10 mm                    |
| *PACKING                                                                            |                 | 10PCS/CTN/20kg/21kg/1.4' |



## PW-1284T 1/2" Twin Hammer

- Handle exhaust
- Forward: 3 Speed Reverse: 1 Speed

|                                                                                     |                 |                          |
|-------------------------------------------------------------------------------------|-----------------|--------------------------|
|  | Square Drive    | 1/2"                     |
|  | Bolt Capacity   | 5/8" (16 mm)             |
|  | Max Torque      | 580 FT-LB (787 N-M)      |
|  | Working Torque  | 500 FT-LB (678 N-M)      |
|  | Free Speed      | 9,000 R.P.M.             |
|  | Air Consumption | 5.46 CFM                 |
|  | Air Inlet       | 1/4"                     |
|  | Air Pressure    | 90 PSI                   |
|  | Overall Length  | 195 mm                   |
|  | Net Weight      | 1.95 kg                  |
|  | Air Hose        | 10 mm                    |
| *PACKING                                                                            |                 | 10PCS/CTN/20kg/21kg/1.4' |



## PW-1281TK

### 17Pcs Set 1/2" Impact Wrench Kit

|           |                                                                |
|-----------|----------------------------------------------------------------|
| Contents: |                                                                |
| 1PC       | PW-1281T                                                       |
| 1PC       | 5" Extension Bar                                               |
| 1PC       | Oil Pot                                                        |
| 1PC       | 4 mm Hex Wrench                                                |
| 1PC       | Nipple                                                         |
| 1PC       | Plastic Case                                                   |
| 1PC       | Mini Oiler                                                     |
| 10PCS     | Air Sockets (CR-V)<br>9, 10, 11, 13, 14, 17, 19, 22, 24, 27 mm |
| *Packing  | 5Sets/CTN/16ka/17ka/1.3'                                       |

A black plastic case, likely the one mentioned in the list, is shown open. It contains several air sockets of different sizes, a hex wrench, a mini oiler, and other small components. The case is black with a latch and a handle.

### OPTION

PW-1283T / PW-1283T-A / PW-1284T / PW-1284T-A

## PW-1982T

### 3/4" Twin Hammer

- Handle exhaust
- Forward: 3 Speed Reverse: 1 Speed

|                                                                                   |                 |                          |
|-----------------------------------------------------------------------------------|-----------------|--------------------------|
|  | Square Drive    | 3/4"                     |
|  | Bolt Capacity   | 26 mm                    |
|  | Max Torque      | 900FT-LB (1220N-M)       |
|  | Working Torque  | 700FT-LB (950N-M)        |
|  | Free Speed      | 4,500 R.P.M.             |
|  | Air Consumption | 14 CFM                   |
|  | Air Inlet       | 3/8"                     |
|  | Air Pressure    | 90 PSI                   |
|  | Overall Length  | 240 mm                   |
|  | Net Weight      | 3.9 kg                   |
|  | Air Hose        | 13 mm                    |
| *PACKING                                                                          |                 | 5PCS/CTN/21kg/22kg/1.54' |



## PW-1283T-A

### 1/2" Twin Hammer

- Handle exhaust
- Forward: 3 Speed Reverse: 1 Speed

|                                                                                     |                 |                          |
|-------------------------------------------------------------------------------------|-----------------|--------------------------|
|    | Square Drive    | 1/2"                     |
|   | Bolt Capacity   | 5/8" (16 mm)             |
|  | Max Torque      | 580 FT-LB (787 N-M)      |
|  | Working Torque  | 500 FT-LB (678 N-M)      |
|  | Free Speed      | 9,000 R.P.M.             |
|  | Air Consumption | 5.46 CFM                 |
|  | Air Inlet       | 1/4"                     |
|  | Air Pressure    | 90 PSI                   |
|  | Overall Length  | 195 mm                   |
|  | Net Weight      | 1.95 kg                  |
|  | Air Hose        | 10 mm                    |
| *PACKING                                                                            |                 | 10PCS/CTN/20kg/21kg/1.4' |



## PW-1284T-A

### 1/2" Twin Hammer

- Handle exhaust
- Forward: 3 Speed Reverse: 1 Speed

|                                                                                     |                 |                          |
|-------------------------------------------------------------------------------------|-----------------|--------------------------|
|  | Square Drive    | 1/2"                     |
|  | Bolt Capacity   | 5/8" (16 mm)             |
|  | Max Torque      | 580 FT-LB (787 N-M)      |
|  | Working Torque  | 500 FT-LB (678 N-M)      |
|  | Free Speed      | 9,000 R.P.M.             |
|  | Air Consumption | 5.46 CFM                 |
|  | Air Inlet       | 1/4"                     |
|  | Air Pressure    | 90 PSI                   |
|  | Overall Length  | 195 mm                   |
|  | Net Weight      | 1.95 kg                  |
|  | Air Hose        | 10 mm                    |
| *PACKING                                                                            |                 | 10PCS/CTN/20kg/21kg/1.4' |



## PW-1283TK4

### 4Pcs Set 1/2" Impact Wrench Kit

|                                                                                       |                                     |
|---------------------------------------------------------------------------------------|-------------------------------------|
|  |                                     |
| Contents:                                                                             |                                     |
| 1PC                                                                                   | PW-1283T                            |
| 4PCS                                                                                  | Air Sockets (CR-V)<br>17, 19, 21 mm |
| *Packing                                                                              | 10Sets/CTN/24kg/25kg/1.4'           |



### OPTION

PW-1281T / PW-1283T-A / PW-1284T / PW-1284T-A



# 1/4" & 3/8" Impact Wrench

Light weight and high torque excellent for use in industrial applications

## YU-0601R

### 1/4" Double Hammer

- Rear exhaust
- Forward: 4 Speed (10N.m / 20N.m / 30N.m / 40N.m)
- Reverse: 4 Speed (10N.m / 20N.m / 30N.m / 40N.m)

|                                                                                   |                 |                          |
|-----------------------------------------------------------------------------------|-----------------|--------------------------|
|  | Square Drive    | 1/4"                     |
|  | Bolt Capacity   | 12MM                     |
|  | Max Torque      | 30FT-LB(4KG-M, 40N-M)    |
|  | Free Speed      | 10000R.P.M.              |
|  | Air Consumption | 5.3 CFM                  |
|  | Air Inlet       | 1/4"                     |
|  | Air Pressure    | 90 PSI                   |
|  | Overall Length  | 135 mm                   |
|  | Net Weight      | 0.8 kg                   |
|  | Air Hose        | 10 mm                    |
|  | *Packing        | 20PCS/CTN/16kg/17kg/1.5' |



## YU-0901RM

### Butterfly Impact Wrench 3/8" Rocking Dog

|                                                                                     |                 |                           |
|-------------------------------------------------------------------------------------|-----------------|---------------------------|
|    | Square Drive    | 3/8"                      |
|    | Bolt Capacity   | 1/2" (13 mm)              |
|   | Max Torque      | 75 FT-LB(10KG-M, 100N-M)  |
|  | Free Speed      | 10000R.P.M.               |
|  | Air Consumption | 4 CFM                     |
|  | Air Inlet       | 1/4"                      |
|  | Air Pressure    | 90 PSI                    |
|  | Overall Length  | 139 mm                    |
|  | Net Weight      | 0.95 kg                   |
|  | Air Hose        | 10 mm                     |
|  | *PACKING        | 20PCS/CTN/20kg/21kg/0.73' |



## YU-0900P

### 3/8" New Pin Clutch

- Side exhaust
- Push button forward/ reverse for one hand operation
- Forward: 4 Speed Reverse: 4 Speed

|                                                                                     |                 |                             |
|-------------------------------------------------------------------------------------|-----------------|-----------------------------|
|  | Square Drive    | 3/8"                        |
|  | Bolt Capacity   | 1/2" (13mm)                 |
|  | Max Torque      | 160 FT-LB (22KG-M, 216 N-M) |
|  | Free Speed      | 10,000 R.P.M.               |
|  | Air Consumption | 3.7 CFM                     |
|  | Air Inlet       | 1/4"                        |
|  | Air Pressure    | 90 PSI                      |
|  | Overall Length  | 163 mm                      |
|  | Net Weight      | 1.60 kg                     |
|  | Air Hose        | 10 mm                       |
|  | *PACKING        | 10PCS/CTN/16kg/17kg/1'      |



## YU-0940P

### 3/8" New Pin Clutch

- Push button forward/reverse for one hand operation
- Forward: 4 Speed Reverse: 4 Speed

|                                                                                     |                 |                             |
|-------------------------------------------------------------------------------------|-----------------|-----------------------------|
|  | Square Drive    | 3/8" (1/2")                 |
|  | Bolt Capacity   | 1/2" (13mm)                 |
|  | Max Torque      | 160 FT-LB (22KG-M, 216 N-M) |
|  | Free Speed      | 10,000 R.P.M.               |
|  | Air Consumption | 3.4 CFM                     |
|  | Air Inlet       | 1/4"                        |
|  | Air Pressure    | 90 PSI                      |
|  | Overall Length  | 149 mm                      |
|  | Net Weight      | 1.30 kg                     |
|  | Air Hose        | 10 mm                       |
|  | PACKING         | 10PCS/CTN/13kg/14kg/1'      |



## YU-0601RK

### 9PCS Set 1/4" Impact Wrench Kit



#### Contents:

|          |                                       |
|----------|---------------------------------------|
| 1PC      | YU-0601R                              |
| 5PCS     | Deep Sockets (CR-V)<br>8,9,10,11,12mm |
| 1PC      | 2" Extension Bar                      |
| 1PC      | Dr. Impact Universal Joint            |
| 1PC      | Metal Case                            |
| *Packing | 8Sets/CTN/18kg/19kg/1'                |

## YU-0903RM

### Butterfly Impact Wrench 3/8" Rocking Dog

|                                                                                     |                 |                          |
|-------------------------------------------------------------------------------------|-----------------|--------------------------|
|    | Square Drive    | 3/8"                     |
|    | Bolt Capacity   | 1/2" (13 mm)             |
|   | Max Torque      | 75 FT-LB(10KG-M, 100N-M) |
|  | Free Speed      | 10000R.P.M.              |
|  | Air Consumption | 4 CFM                    |
|  | Air Inlet       | 1/4"                     |
|  | Air Pressure    | 90 PSI                   |
|  | Overall Length  | 171 mm                   |
|  | Net Weight      | 1.1 kg                   |
|  | Air Hose        | 10 mm                    |
|  | *PACKING        | 20PCS/CTN/22kg/23kg/1'   |



## YU-0904T

### 3/8" Twin Hammer

- Side exhaust
- Push button forward/ reverse for one hand operation
- Forward: 4 Speed Reverse: 4 Speed

|                                                                                     |                 |                             |
|-------------------------------------------------------------------------------------|-----------------|-----------------------------|
|  | Square Drive    | 3/8"                        |
|  | Bolt Capacity   | 1/2" (13mm)                 |
|  | Max Torque      | 280 FT-LB (39KG-M, 380 N-M) |
|  | Free Speed      | 10,000 R.P.M.               |
|  | Air Consumption | 3.7CFM                      |
|  | Air Inlet       | 1/4"                        |
|  | Air Pressure    | 90 PSI                      |
|  | Overall Length  | 163 mm                      |
|  | Net Weight      | 1.60 kg                     |
|  | Air Hose        | 10 mm                       |
|  | *PACKING        | 10PCS/CTN/16kg/17kg/1'      |



## YU-0900PK YU-0904TK YU-0940PK

### 19Pcs Set 3/8" Impact Wrench Kit



#### Contents:

|          |                                                                    |
|----------|--------------------------------------------------------------------|
| 1PC      | YU-0900P / YU-0904T / YU-0940P                                     |
| 10PCS    | Air Sockets (Chrome-Molybdenum)<br>8,10,11,12,13,14,16,17,19,21 mm |
| 4PCS     | Deep Air Sockets 8,10,12,14 mm                                     |
| 1PC      | Nipple                                                             |
| 1PC      | 4 mm Hex Wrench                                                    |
| 1PC      | 75 mm Extension Bar                                                |
|          | Plastic Case                                                       |
| *PACKING | 5Sets/CTN/16kg/17kg/1.3'                                           |



# 1/2" Mini Impact Wrench CE

Light weight and high torque excellent for use in industrial applications

## YU-0902P New Pin Clutch


- Side exhaust
- Push button forward/reverse for one hand operation
- Forward: 4 Speed
- Reverse: 4 Speed



|          |                 |                           |
|----------|-----------------|---------------------------|
|          | Square Drive    | 1/2"                      |
|          | Bolt Capacity   | 1/2" (13mm)               |
|          | Max Torque      | 160FT-LB (22KG-M, 216N-M) |
|          | Free Speed      | 10000R.P.M.               |
|          | Air Consumption | 3.7 CFM                   |
|          | Air Inlet       | 1/4"                      |
|          | Air Pressure    | 90 PSI                    |
|          | Overall Length  | 163 mm                    |
|          | Net Weight      | 1.6 kg                    |
|          | Air Hose        | 10 mm                     |
| *PACKING |                 | 10PCS/CTN/16kg/17kg/1'    |

## YU-0942P New Pin Clutch

- Side exhaust
- Push button forward/reverse for one hand operation
- Forward: 4 Speed
- Reverse: 4 Speed



|          |                 |                           |
|----------|-----------------|---------------------------|
|          | Square Drive    | 1/2"                      |
|          | Bolt Capacity   | 1/2" (13mm)               |
|          | Max Torque      | 160FT-LB (22KG-M, 216N-M) |
|          | Free Speed      | 10000R.P.M.               |
|          | Air Consumption | 3.4 CFM                   |
|          | Air Inlet       | 1/4"                      |
|          | Air Pressure    | 90 PSI                    |
|          | Overall Length  | 149mm                     |
|          | Net Weight      | 1.3 kg                    |
|          | Air Hose        | 10 mm                     |
| *PACKING |                 | 10PCS/CTN/13kg/14kg/1'    |

## YU-0906T Twin Hammer

- Side exhaust
- Push button forward/ reverse for one hand operation
- Forward: 4 Speed Reverse: 4 Speed



|          |                 |                          |
|----------|-----------------|--------------------------|
|          | Square Drive    | 1/2"                     |
|          | Bolt Capacity   | 16 mm                    |
|          | Max Torque      | 320FT-LB(44KG-M, 430N-M) |
|          | Free Speed      | 10000R.P.M.              |
|          | Air Consumption | 3.7 CFM                  |
|          | Air Inlet       | 1/4"                     |
|          | Air Pressure    | 90 PSI                   |
|          | Overall Length  | 163 mm                   |
|          | Net Weight      | 1.6 kg                   |
|          | Air Hose        | 1/2" (10mm)              |
| *PACKING |                 | 10PCS/CTN/16kg/17kg/1'   |

## YU-0906TK3 YU-0902PK3 YU-0942PK3

### 9Pcs Set 1/2" Mini Impact Wrench Kit

Contents:

|          |                                                               |
|----------|---------------------------------------------------------------|
| 1PC      | 4mm Hex Wrench                                                |
| 1PC      | Oil Pot                                                       |
| 1PC      | Mini Oiler                                                    |
| 1PC      | Nipple                                                        |
| 1PC      | Plastic Case                                                  |
| 1PC      | YU-0906T/YU-0902P/YU0942P                                     |
| 3PCS     | Thin Wall Impact Sockets<br>17, 19, 21 mm (Chrome-Molybdenum) |
| *PACKING | 5Sets/CTN/16kg/17kg/1.3'                                      |



## YU-0907T Stubby

### Twin Hammer

Short and small length for easy to get into narrow space.

- Handle exhaust.
- Forward: 3 Speed
- Reverse : 3 Speed



|          |                 |                             |
|----------|-----------------|-----------------------------|
|          | Square Drive    | 1/2"                        |
|          | Bolt Capacity   | 14 mm                       |
|          | Max Torque      | 450 FT-LB (62KG-M, 610 N-M) |
|          | Free Speed      | 10000R.P.M.                 |
|          | Air Consumption | 5.8 CFM                     |
|          | Air Inlet       | 1/4"                        |
|          | Air Pressure    | 90 PSI                      |
|          | Overall Length  | 122 mm                      |
|          | Net Weight      | 1.56 kg                     |
|          | Air Hose        | 10 mm                       |
| *PACKING |                 | 10PCS/CTN/16kg/17kg/0.7'    |

## YU-0907TK

### 14pcs Set 1/2" Impact Wrench Kit

Contents:

|         |                                                     |                                                                                      |
|---------|-----------------------------------------------------|--------------------------------------------------------------------------------------|
| 1PC     | YU-0907T                                            |  |
| 1PC     | 75mm Extension Bar                                  |                                                                                      |
| 1PC     | Oil Pot                                             |                                                                                      |
| 1PC     | Nipple                                              |                                                                                      |
| 1PC     | Plastic Case                                        |                                                                                      |
| 9PCS    | Mini Sockets (CR-V)<br>13,14,15,16,17,18,19,21,24mm |                                                                                      |
| PACKING | 5Sets/PCS/CTN/15kg/16kg/1.3'                        |                                                                                      |



## YU-0907TK2

### 17pcs Set 1/2" Impact Wrench Kit

Contents:

|          |                                                            |                                                                                       |
|----------|------------------------------------------------------------|---------------------------------------------------------------------------------------|
| 1PC      | YU-0907T                                                   |  |
| 1PC      | 75mm Extension Bar                                         |                                                                                       |
| 1PC      | Oil Pot                                                    |                                                                                       |
| 1PC      | Nipple                                                     |                                                                                       |
| 1PC      | Plastic Case                                               |                                                                                       |
| 9PCS     | Mini Sockets (CR-V)<br>13,14,15,16,17,18,19,21,24mm        |                                                                                       |
| 3PCS     | Thin Wall Impact Sockets<br>17,19,21mm (Chrome-Molybdenum) |                                                                                       |
| *PACKING | 5Sets/PCS/CTN/18.5kg/19.5kg/1.3'                           |                                                                                       |



## YU-0907TK3

### 8pcs Set 1/2" Impact Wrench Kit

Contents:

|           |                                                            |                                                                                       |
|-----------|------------------------------------------------------------|---------------------------------------------------------------------------------------|
| Contents: |                                                            |  |
| 1PC       | YU-0907T                                                   |                                                                                       |
| 1PC       | 75mm Extension Bar                                         |                                                                                       |
| 1PC       | Oil Pot                                                    |                                                                                       |
| 1PC       | Nipple                                                     |                                                                                       |
| 1PC       | Plastic Case                                               |                                                                                       |
| 3PCS      | Thin Wall Impact Sockets<br>17,19,21mm (Chrome-Molybdenum) |                                                                                       |
| *PACKING  | 5Sets /CTN/15kg/16kg/1.3'                                  |                                                                                       |





# 1/2" Impact Wrench Pin Clutch

## YU-1200P New Pin Clutch YU-1200P2 2" Anvil

|                                                                                   |                 |                                                          |
|-----------------------------------------------------------------------------------|-----------------|----------------------------------------------------------|
|  | Square Drive    | 1/2"                                                     |
|  | Bolt Capacity   | 5/8" (16 mm)                                             |
|  | Max Torque      | 450FT-LB(62KG-M, 610N-M)                                 |
|  | Free Speed      | 7000 R.P.M.                                              |
|  | Air Consumption | 5.0 CFM                                                  |
|  | Air Inlet       | 1/4"                                                     |
|  | Air Pressure    | 90 PSI                                                   |
|  | Overall Length  | 190 mm (2") : 225 mm                                     |
|  | Net Weight      | 2.4 kg (2") : 2.5 kg                                     |
|  | Air Hose        | 10 mm                                                    |
|  | *PACKING        | 10PCS/CTN/24kg/25kg/1.3'<br>(2")10PCS/CTN/25kg/26kg/1.4' |



- Side exhaust
- Push button forward/reverse for one hand operation
- Forward: 4 Speed Reverse: 4 Speed

## YU-1202P New Pin Clutch YU-1202P2 2" Anvil


|                                                                                     |                 |                                                          |
|-------------------------------------------------------------------------------------|-----------------|----------------------------------------------------------|
|    | Square Drive    | 1/2"                                                     |
|    | Bolt Capacity   | 5/8" (16 mm)                                             |
|    | Max Torque      | 480FT-LB(66KG-M, 650N-M)                                 |
|    | Free Speed      | 7000 R.P.M.                                              |
|    | Air Consumption | 5.0 CFM                                                  |
|   | Air Inlet       | 1/4"                                                     |
|  | Air Pressure    | 90 PSI                                                   |
|  | Overall Length  | 190mm (2"): 225 mm                                       |
|  | Net Weight      | 2.4 kg (2"): 2.5 kg                                      |
|  | Air Hose        | 10 mm                                                    |
|  | *PACKING        | 10PCS/CTN/24kg/25kg/1.3'<br>(2")10PCS/CTN/25kg/26kg/1.4' |



- Side exhaust
- Push button forward/reverse for one hand operation
- Forward: 4 Speed Reverse: 4 Speed

## YU-1210P New Pin Clutch YU-1210P2 2" Anvil

|                                                                                     |                 |                                                          |
|-------------------------------------------------------------------------------------|-----------------|----------------------------------------------------------|
|  | Square Drive    | 1/2"                                                     |
|  | Bolt Capacity   | 5/8" (16mm)                                              |
|  | Max Torque      | 400FT-LB(55KG-M, 543N-M)                                 |
|  | Free Speed      | 8000 R.P.M.                                              |
|  | Air Consumption | 4.8 CFM                                                  |
|  | Air Inlet       | 1/4"                                                     |
|  | Air Pressure    | 90 PSI                                                   |
|  | Overall Length  | 190mm                                                    |
|  | Net Weight      | 2.0 kg                                                   |
|  | Air Hose        | 10 mm                                                    |
|  | *PACKING        | 10PCS/CTN/20kg/21kg/1.4'<br>(2")10PCS/CTN/21kg/22kg/1.4' |



- Handle exhaust
- Push button forward/reverse for one hand operation
- Forward: 4 Speed Reverse: 1 Speed



- Handle exhaust
- Push button forward/reverse for one hand operation
- Forward: 4 Speed Reverse: 1 Speed

## YU-1240P Pin Clutch YU-1240P2 2" Anvil

|                                                                                   |                 |                                                          |
|-----------------------------------------------------------------------------------|-----------------|----------------------------------------------------------|
|  | Square Drive    | 1/2"                                                     |
|  | Bolt Capacity   | 5/8" (16mm)                                              |
|  | Max Torque      | 320FT-LB (43KG-M, 434N-M)                                |
|  | Free Speed      | 7000 R.P.M.                                              |
|  | Air Consumption | 4.8 CFM                                                  |
|  | Air Inlet       | 1/4"                                                     |
|  | Air Pressure    | 90 PSI                                                   |
|  | Overall Length  | 190 mm (2") : 225 mm                                     |
|  | Net Weight      | 2.4 kg (2") : 2.55 kg                                    |
|  | Air Hose        | 10 mm                                                    |
|  | *PACKING        | 10PCS/CTN/24kg/25kg/1.3'<br>(2")10PCS/CTN/25kg/26kg/1.4' |



- Side exhaust
- Push button forward/reverse for one hand operation

## YU-1260P New Pin Clutch YU-1260P2 2" Anvil

|                                                                                     |                 |                                                          |
|-------------------------------------------------------------------------------------|-----------------|----------------------------------------------------------|
|    | Square Drive    | 1/2"                                                     |
|    | Bolt Capacity   | 5/8" (16mm)                                              |
|    | Max Torque      | 600FT-LB (84KG-M, 813N-M)                                |
|    | Free Speed      | 6500 R.P.M.                                              |
|    | Air Consumption | 4.2 CFM                                                  |
|   | Air Inlet       | 1/4"                                                     |
|  | Air Pressure    | 90 PSI                                                   |
|  | Overall Length  | 198 mm (2") : 230 mm                                     |
|  | Net Weight      | 2.8 kg (2") : 2.9 kg                                     |
|  | Air Hose        | 10 mm                                                    |
|  | *PACKING        | 10PCS/CTN/28kg/29kg/1.4'<br>(2")10PCS/CTN/29kg/30kg/1.4' |



- Handle exhaust
- Push button forward/reverse for one hand operation
- Forward: 4 Speed Reverse: 1 Speed

## YU-1270P New Pin Clutch YU-1270P2 2" Anvil

|                                                                                     |                 |                                                          |
|-------------------------------------------------------------------------------------|-----------------|----------------------------------------------------------|
|  | Square Drive    | 1/2"                                                     |
|  | Bolt Capacity   | 5/8" (16mm)                                              |
|  | Max Torque      | 400FT-LB (55KG-M, 543N-M)                                |
|  | Free Speed      | 7000 R.P.M.                                              |
|  | Air Consumption | 4.0 CFM                                                  |
|  | Air Inlet       | 1/4"                                                     |
|  | Air Pressure    | 90 PSI                                                   |
|  | Overall Length  | 197 mm (2") : 238 mm                                     |
|  | Net Weight      | 2.4 kg (2") : 2.5 kg                                     |
|  | Air Hose        | 10 mm                                                    |
|  | *PACKING        | 10PCS/CTN/24kg/25kg/1.3'<br>(2")10PCS/CTN/25kg/26kg/1.4' |



- Handle exhaust
- Forward: 3 Speed Reverse: 1 Speed

## YU-1210PH New Pin Clutch YU-1210PH2 2" Anvil

|                                                                                     |                 |                                                          |
|-------------------------------------------------------------------------------------|-----------------|----------------------------------------------------------|
|  | Square Drive    | 1/2"                                                     |
|  | Bolt Capacity   | 5/8" (16mm)                                              |
|  | Max Torque      | 430FT-LB(59KG-M, 583N-M)                                 |
|  | Free Speed      | 8500 R.P.M.                                              |
|  | Air Consumption | 4.8 CFM                                                  |
|  | Air Inlet       | 1/4"                                                     |
|  | Air Pressure    | 90 PSI                                                   |
|  | Overall Length  | 190mm                                                    |
|  | Net Weight      | 2.3 kg                                                   |
|  | Air Hose        | 10 mm                                                    |
|  | *PACKING        | 10PCS/CTN/23kg/24kg/1.4'<br>(2")10PCS/CTN/24kg/25kg/1.4' |



# 1/2" Impact Wrench Twin Hammer

## YU-1202T Twin Hammer YU-1202T2 2" Anvil

|                                                                                   |                 |                                                          |
|-----------------------------------------------------------------------------------|-----------------|----------------------------------------------------------|
|  | Square Drive    | 1/2"                                                     |
|  | Bolt Capacity   | 5/8" (16mm)                                              |
|  | Max Torque      | 500FT-LB (69KG-M, 678N-M)                                |
|  | Free Speed      | 7000 R.P.M.                                              |
|  | Air Consumption | 5.0 CFM                                                  |
|  | Air Inlet       | 1/4"                                                     |
|  | Air Pressure    | 90 PSI                                                   |
|  | Overall Length  | 175 mm (2") : 220 mm                                     |
|  | Net Weight      | 2.4 kg (2") : 2.5 kg                                     |
|  | Air Hose        | 10 mm                                                    |
|  | *PACKING        | 10PCS/CTN/24kg/25kg/1.3'<br>(2")10PCS/CTN/25kg/26kg/1.4' |



- Handle exhaust
- Push button forward/reverse for one hand operation
- Forward: 4 Speed Reverse: 4 Speed

## YU-1260T Twin Hammer YU-1260T2 2" Anvil

|                                                                                   |                 |                                                          |
|-----------------------------------------------------------------------------------|-----------------|----------------------------------------------------------|
|  | Square Drive    | 1/2"                                                     |
|  | Bolt Capacity   | 5/8" (16mm)                                              |
|  | Max Torque      | 600FT-LB (84KG-M, 813N-M)                                |
|  | Free Speed      | 7000 R.P.M.                                              |
|  | Air Consumption | 4.2 CFM                                                  |
|  | Air Inlet       | 1/4"                                                     |
|  | Air Pressure    | 90 PSI                                                   |
|  | Overall Length  | 182 mm (2") : 214 mm                                     |
|  | Net Weight      | 2.8 kg (2") : 2.9 kg                                     |
|  | Air Hose        | 10 mm                                                    |
|  | *PACKING        | 10PCS/CTN/28kg/29kg/1.4'<br>(2")10PCS/CTN/29kg/30kg/1.4' |



- Handle exhaust
- Push button forward/reverse for one hand operation
- Forward: 4 Speed Reverse: 1 Speed

## YU-1280T Twin Hammer YU-1280T2 2" Anvil

|                                                                                     |                 |                                                          |
|-------------------------------------------------------------------------------------|-----------------|----------------------------------------------------------|
|    | Square Drive    | 1/2"                                                     |
|    | Bolt Capacity   | 5/8" (16mm)                                              |
|    | Max Torque      | 400FT-LB (55KG-M, 543N-M)                                |
|   | Free Speed      | 7000 R.P.M.                                              |
|  | Air Consumption | 4 CFM                                                    |
|  | Air Inlet       | 1/4"                                                     |
|  | Air Pressure    | 90 PSI                                                   |
|  | Overall Length  | 175 mm (2") : 220 mm                                     |
|  | Net Weight      | 2.4 kg (2") : 2.5 kg                                     |
|  | Air Hose        | 10 mm                                                    |
|  | *PACKING        | 10PCS/CTN/24kg/25kg/1.3'<br>(2")10PCS/CTN/25kg/26kg/1.4' |



- Handle exhaust
- Forward: 3 Speed Reverse: 1 Speed

## YU-1290T Twin Hammer YU-1290T2 2" Anvil

|                                                                                     |                 |                                                          |
|-------------------------------------------------------------------------------------|-----------------|----------------------------------------------------------|
|    | Square Drive    | 1/2"                                                     |
|    | Bolt Capacity   | 5/8" (16mm)                                              |
|    | Max Torque      | 425FT-LB (58KG-M, 576N-M)                                |
|   | Free Speed      | 7000 R.P.M.                                              |
|  | Air Consumption | 5.0 CFM                                                  |
|  | Air Inlet       | 1/4"                                                     |
|  | Air Pressure    | 90 PSI                                                   |
|  | Overall Length  | 175 mm (2") : 220 mm                                     |
|  | Net Weight      | 2.4 kg (2") : 2.5 kg                                     |
|  | Air Hose        | 10 mm                                                    |
|  | *PACKING        | 10PCS/CTN/24kg/25kg/1.3'<br>(2")10PCS/CTN/25kg/26kg/1.4' |



- Side exhaust
- Push button forward/reverse for one-hand operation
- Forward: 4 Speed Reverse: 4 Speed

## YU-1200PK

17PCS Set 1/2" Impact Wrench Kit

|           |                                |
|-----------|--------------------------------|
| Contents: |                                |
| 1PC       | YU-1200P                       |
| 1PC       | 5"Extension Bar                |
| 1PC       | Oil Pot                        |
| 1PC       | 4mm Hex Wrench                 |
| 1PC       | Nipple                         |
| 1PC       | Plastic Case                   |
| 1PC       | Mini Oiler                     |
| 10PCS     | Air Sockets (CR-V)             |
|           | 9,10,11,13,14,17,19,22,24,27mm |
| *PACKING  | 5Sets/CTN/22kg/23kg/1.6'       |



### OPTION

YU-1202PK YU-1240PK YU-1290TK  
YU-1210PK YU-1270PK YU-1202TK YU-1280TK

## YU-1260TK YU-1260PK

17PCS Set 1/2" Impact Wrench Kit

|           |                                 |
|-----------|---------------------------------|
| Contents: |                                 |
| 1PC       | YU-1260T/YU-1260P               |
| 1PC       | 5"Extension Bar                 |
| 1PC       | Oil Pot                         |
| 1PC       | 4mm Hex Wrench                  |
| 1PC       | Nipple                          |
| 1PC       | Plastic Case                    |
| 1PC       | Mini Oiler                      |
| 10PCS     | Air Sockets (Chrome-Molybdenum) |
|           | 9,10,11,13,14,17,19,22,24,27 mm |
| *PACKING  | 5Sets/CTN/23.5kg/24.5kg/1.8'    |



### OPTION



YU-1260PK

## YU-1210PK2

12PCS Set 1/2" Impact Wrench Kit

|           |                                      |
|-----------|--------------------------------------|
| Contents: |                                      |
| 1PC       | YU-1210P                             |
| 6PCS      | Air Deep Sockets (Chrome-Molybdenum) |
|           | 17,19,21mm with Plastic Sleeves      |
|           | 22,23,24mm                           |
| 1PC       | Oil Pot                              |
| 1PC       | 4mm Hex Wrench                       |
| 1PC       | Nipple                               |
| 1PC       | Plastic Case                         |
| 1PC       | Mini Oiler                           |
| *PACKING  | 5 Sets/CTN/20.5kg/21.5kg/1.6'        |



outside and inside plastic sleeves to protect rims and wheel-nuts



17-19-21 mm



22-23-24 mm

### OPTION

YU-1200PK2 YU-1240PK2 YU-1290TK2  
YU-1202PK2 YU-1260PK2 YU-1270PK2  
YU-1202TK2 YU-1260TK2 YU-1280TK2





# 3/4" Impact Wrench Pin Clutch / Rocking Dog

## YU-1900P Pin Clutch YU-1900P6 6"Anvil

- Side exhaust
- Push button forward / reverse for one hand operation



|                                                                                   |                 |                                                          |
|-----------------------------------------------------------------------------------|-----------------|----------------------------------------------------------|
|  | Square Drive    | 3/4"                                                     |
|  | Bolt Capacity   | 1" (26mm)                                                |
|  | Max Torque      | 700FT-LB (97KG-M, 949N-M)                                |
|  | Free Speed      | 5000 R.P.M.                                              |
|  | Air Consumption | 5.4 CFM                                                  |
|  | Air Inlet       | 1/4"                                                     |
|  | Air Pressure    | 90 PSI                                                   |
|  | Overall Length  | 241 mm                                                   |
|  | Net Weight      | 4.6 kg                                                   |
|  | Air Hose        | 13 mm                                                    |
| *PACKING                                                                          |                 | 4PCS/CTN/20kg/21kg/1.24'<br>(6") 4PCS/CTN/22kg/23kg/1.6' |

## YU-1920P New Pin Clutch YU-1920P6 6"Anvil

- Handle exhaust
- Push button forward / reverse for one hand operation
- Forward: 4 Speed  
Reverse: 1 Speed



|                                                                                   |                 |                                                         |
|-----------------------------------------------------------------------------------|-----------------|---------------------------------------------------------|
|  | Square Drive    | 3/4"                                                    |
|  | Bolt Capacity   | 1" (26mm)                                               |
|  | Max Torque      | 850FT-LB (117KG-M, 1154N-M)                             |
|  | Free Speed      | 5000R.P.M.                                              |
|  | Air Consumption | 4.8 CFM                                                 |
|  | Air Inlet       | 1/4"                                                    |
|  | Air Pressure    | 90 PSI                                                  |
|  | Overall Length  | 237mm                                                   |
|  | Net Weight      | 4 kg                                                    |
|  | Air Hose        | 13 mm                                                   |
| *PACKING                                                                          |                 | 6PCS/CTN/24kg/25kg/1.5'<br>(6") 4PCS/CTN/18kg/19kg/1.6' |

## YU-1980P Pin Clutch YU-1980P6 6"Anvil

- Side exhaust
- Push button forward / reverse for one hand operation
- Forward: 4 Speed  
Reverse: 4 Speed



|                                                                                     |                 |                                                          |
|-------------------------------------------------------------------------------------|-----------------|----------------------------------------------------------|
|  | Square Drive    | 3/4"                                                     |
|  | Bolt Capacity   | 1-1/8" (28mm)                                            |
|  | Max Torque      | 900FT-LB (124KG-M, 1220N-M)                              |
|  | Free Speed      | 5000 R.P.M.                                              |
|  | Air Consumption | 5.2 CFM                                                  |
|  | Air Inlet       | 1/4"                                                     |
|  | Air Pressure    | 90 PSI                                                   |
|  | Overall Length  | 252 mm                                                   |
|  | Net Weight      | 4.6 kg                                                   |
|  | Air Hose        | 13 mm                                                    |
| *PACKING                                                                            |                 | 4PCS/CTN/20kg/21kg/1.24'<br>(6") 4PCS/CTN/22kg/23kg/1.6' |

## YU-1981P Pin Clutch YU-1981P6 6"Anvil

- Side exhaust
- Push button forward / reverse for one hand operation
- Forward: 4 Speed  
Reverse: 4 Speed



|                                                                                     |                 |                                                          |
|-------------------------------------------------------------------------------------|-----------------|----------------------------------------------------------|
|  | Square Drive    | 3/4"                                                     |
|  | Bolt Capacity   | 1-1/8" (28mm)                                            |
|  | Max Torque      | 900FT-LB (124KG-M, 1220N-M)                              |
|  | Free Speed      | 5000 R.P.M.                                              |
|  | Air Consumption | 5.2 CFM                                                  |
|  | Air Inlet       | 1/4"                                                     |
|  | Air Pressure    | 90 PSI                                                   |
|  | Overall Length  | 252 mm                                                   |
|  | Net Weight      | 4.6 kg                                                   |
|  | Air Hose        | 13 mm                                                    |
| *PACKING                                                                            |                 | 4PCS/CTN/20kg/21kg/1.24'<br>(6") 4PCS/CTN/22kg/23kg/1.6' |

## YU-1900R Rocking Dog YU-1900R6 6"Anvil

- Side exhaust
- Push button forward / reverse for one hand operation



|                                                                                     |                 |                                                          |
|-------------------------------------------------------------------------------------|-----------------|----------------------------------------------------------|
|  | Square Drive    | 3/4"                                                     |
|  | Bolt Capacity   | 7/8" (20mm)                                              |
|  | Max Torque      | 500FT-LB(70KG-M, 678N-M)                                 |
|  | Free Speed      | 4500 R.P.M.                                              |
|  | Air Consumption | 5.4 CFM                                                  |
|  | Air Inlet       | 1/4"                                                     |
|  | Air Pressure    | 90 PSI                                                   |
|  | Overall Length  | 241 mm                                                   |
|  | Net Weight      | 4.6 kg                                                   |
|  | Air Hose        | 13 mm                                                    |
| *PACKING                                                                            |                 | 4PCS/CTN/20kg/21kg/1.24'<br>(6") 4PCS/CTN/22kg/23kg/1.6' |

## YU-1980R Rocking Dog YU-1980R6 6"Anvil

- Side exhaust
- Push button forward / reverse for one hand operation
- Forward: 4 Speed Reverse: 4 Speed



|                                                                                     |                 |                                                          |
|-------------------------------------------------------------------------------------|-----------------|----------------------------------------------------------|
|  | Square Drive    | 3/4"                                                     |
|  | Bolt Capacity   | 7/8" (20mm)                                              |
|  | Max Torque      | 500FT-LB (70KG-M, 678N-M)                                |
|  | Free Speed      | 5000 R.P.M.                                              |
|  | Air Consumption | 5.2 CFM                                                  |
|  | Air Inlet       | 1/4"                                                     |
|  | Air Pressure    | 90 PSI                                                   |
|  | Overall Length  | 252 mm                                                   |
|  | Net Weight      | 4.6 kg                                                   |
|  | Air Hose        | 13 mm                                                    |
| *PACKING                                                                            |                 | 4PCS/CTN/20kg/21kg/1.24'<br>(6") 4PCS/CTN/22kg/23kg/1.6' |



# 3/4" Impact Wrench Twin Hammer

## YU-1980T Twin Hammer YU-1980T6 6" Anvil

- Side exhaust
- Push button forward / reverse for one hand operation
- Forward: 4 Speed  
Reverse: 4 Speed



|                                                                                    |                 |                                                                  |
|------------------------------------------------------------------------------------|-----------------|------------------------------------------------------------------|
|   | Square Drive    | 3/4"                                                             |
|   | Bolt Capacity   | 1-1/8" (28mm)                                                    |
|   | Max Torque      | 900FT-LB (124KG-M, 1220N-M)                                      |
|   | Free Speed      | 5000 R.P.M.                                                      |
|   | Air Consumption | 5.4 CFM                                                          |
|   | Air Inlet       | 1/4"                                                             |
|   | Air Pressure    | 90 PSI                                                           |
|   | Overall Length  | 210 mm                                                           |
|   | Net Weight      | 4.2 kg                                                           |
|  | Air Hose        | 13 mm                                                            |
|                                                                                    | *PACKING        | 4PCS/CTN/16.8kg/17.8kg/1.24'<br>(6") 4PCS/CTN/18.8kg/19.8kg/1.6' |

## YU-1980PK

14Pcs 3/4" Impact Wrench Kit

Contents :

|          |                           |
|----------|---------------------------|
| 1PC      | YU-1980P                  |
| 8PCS     | Air Sockets (CR-MO)       |
|          | 26,27,29,30,32,35,36,38mm |
| 1PC      | Oil Pot                   |
| 1PC      | 4mm Hex Wrench            |
| 1PC      | 5mm Hex Wrench            |
| 1PC      | Nipple                    |
| 1PC      | Plastic Case              |
| *PACKING | 3 Sets/CTN/26kg/27kg/1.6' |



## OPTION

YU-1900PK YU-1920PK YU-1981PK  
YU-1980TK YU-1900RK YU-1980RK

# 1" Impact Wrench Pistol Style

## YU-2500R Rocking Dog

- Side exhaust
- Forward: 4 Speed  
Reverse: 4 Speed



|                                                                                     |                 |                                 |
|-------------------------------------------------------------------------------------|-----------------|---------------------------------|
|  | Square Drive    | 1"                              |
|  | Bolt Capacity   | 1-5/8" (41mm)                   |
|  | Max Torque      | 1400FT-LB<br>(193KG-M, 1895N-M) |
|  | Free Speed      | 3500 R.P.M.                     |
|  | Air Consumption | 6.8 CFM                         |
|  | Air Inlet       | 3/8"                            |
|  | Air Pressure    | 90 PSI                          |
|  | Overall Length  | 310 mm                          |
|  | Net Weight      | 11.32 kg                        |
|  | Air Hose        | 13 mm                           |
|                                                                                     | *PACKING        | 2PCS/CTN/22.6kg/25.3kg/1.4'     |

## YU-2500T Twin Hammer

- Side exhaust
- Forward: 4 Speed  
Reverse: 4 Speed



|                                                                                     |                 |                                |
|-------------------------------------------------------------------------------------|-----------------|--------------------------------|
|  | Square Drive    | 1"                             |
|  | Bolt Capacity   | 2" (50mm)                      |
|  | Max Torque      | 2500FT-LB<br>(345KG-M 3390N-M) |
|  | Free Speed      | 3400 R.P.M.                    |
|  | Air Consumption | 6.8 CFM                        |
|  | Air Inlet       | 3/8"                           |
|  | Air Pressure    | 90 PSI                         |
|  | Overall Length  | 302 mm                         |
|  | Net Weight      | 11.8 kg                        |
|  | Air Hose        | 13 mm                          |
|                                                                                     | *PACKING        | 2PCS/CTN/23.6kg/26.3kg/1.4'    |

## YU-2580PL Pin Less

- Side exhaust
- Forward: 4 Speed  
Reverse: 4 Speed



|                                                                                     |                 |                                 |
|-------------------------------------------------------------------------------------|-----------------|---------------------------------|
|  | Square Drive    | 1"                              |
|  | Bolt Capacity   | 1-3/4" (45mm)                   |
|  | Max Torque      | 2200FT-LB<br>(304KG-M, 2983N-M) |
|  | Free Speed      | 3400 R.P.M.                     |
|  | Air Consumption | 6.8 CFM                         |
|  | Air Inlet       | 3/8"                            |
|  | Air Pressure    | 90 PSI                          |
|  | Overall Length  | 306 mm                          |
|  | Net Weight      | 12.4 kg                         |
|  | Air Hose        | 13 mm                           |
|                                                                                     | *PACKING        | 2PCS/CTN/24.8kg/27.5kg/1.4'     |

## YU-2520P New Pin Clutch YU-2520P6 6" Anvil

- Side exhaust
- Push button forward / reverse for one hand operation
- Forward: 4 Speed Reverse: 4 Speed



|                                                                                     |                 |                                                              |
|-------------------------------------------------------------------------------------|-----------------|--------------------------------------------------------------|
|  | Square Drive    | 1"                                                           |
|  | Bolt Capacity   | 1-1/2" (38mm)                                                |
|  | Max Torque      | 1300FT-LB<br>(180KG-M, 1765N-M)                              |
|  | Free Speed      | 4500 R.P.M.                                                  |
|  | Air Consumption | 5.2 CFM                                                      |
|  | Air Inlet       | 1/4"                                                         |
|  | Air Pressure    | 90 PSI                                                       |
|  | Overall Length  | 252 mm (6") : 360 mm                                         |
|  | Net Weight      | 5 kg (6") : 5.8 kg                                           |
|  | Air Hose        | 13 mm                                                        |
|                                                                                     | *PACKING        | 4PCS/CTN/20kg/22kg/1.24'<br>(6") 4PCS/CTN/23.2kg/25.8kg/1.6' |



# 1" Impact Wrench CE



- Forward: 3 Speed
- Reverse: 3 Speed
- Option: Inside Trigger

## YU-2590PL8 8" ANVIL

Pin Less

## YU-2590PL 2" ANVIL

|                   |                                                               |
|-------------------|---------------------------------------------------------------|
| ☐ Square Drive    | 1"                                                            |
| ☐ Bolt Capacity   | 1-3/4" (45mm)                                                 |
| ☐ Max Torque      | 2000FT-LB(277KG-M, 2712N-M)                                   |
| ☐ Free Speed      | 3400R.P.M.                                                    |
| ☐ Air Consumption | 8.2 CFM                                                       |
| ☐ Air Inlet       | 1/2"                                                          |
| ☐ Air Pressure    | 90PSI                                                         |
| ☐ Overall Length  | 625mm (2") : 443mm                                            |
| ☐ Net Weight      | 14.5kg (2") : 13.1kg                                          |
| ☐ Air Hose        | 13mm                                                          |
| *PACKING          | 1PCS/CTN/14.5kg/15.5 kg/1'<br>(2") 1PCS/CTN/13.1kg/14.1kg /1' |



- Forward: 3 Speed
- Reverse: 3 Speed
- Option: Inside Trigger

## YU-2590T8 8" ANVIL

Twin Hammer

## YU-2590T 2" ANVIL

|                   |                                                              |
|-------------------|--------------------------------------------------------------|
| ☐ Square Drive    | 1"                                                           |
| ☐ Bolt Capacity   | 2" (50mm)                                                    |
| ☐ Max Torque      | 2000FT-LB(277KG-M, 2712N-M)                                  |
| ☐ Free Speed      | 3400R.P.M.                                                   |
| ☐ Air Consumption | 8.2CFM                                                       |
| ☐ Air Inlet       | 1/2"                                                         |
| ☐ Air Pressure    | 90PSI                                                        |
| ☐ Overall Length  | 597mm (2") : 432mm                                           |
| ☐ Net Weight      | 13.5kg (2") : 11.7kg                                         |
| ☐ Air Hose        | 13mm                                                         |
| *PACKING          | 1PCS/CTN/13.5kg/14.5 kg/1'<br>(2") 1PCS/CTN/11.7kg/12.7kg/1' |



- Forward: 3 Speed
- Reverse: 3 Speed
- Option: Inside Trigger

## YU-2570PL8 8" ANVIL

Pin Less

## YU-2570PL 2" ANVIL

|                   |                                                          |
|-------------------|----------------------------------------------------------|
| ☐ Square Drive    | 1"                                                       |
| ☐ Bolt Capacity   | 2" (50mm)                                                |
| ☐ Max Torque      | 2500FT-LB(345KG-M, 3390N-M)                              |
| ☐ Free Speed      | 3000R.P.M.                                               |
| ☐ Air Consumption | 8.5 CFM                                                  |
| ☐ Air Inlet       | 1/2"                                                     |
| ☐ Air Pressure    | 90PSI                                                    |
| ☐ Overall Length  | 630mm (2") : 443mm                                       |
| ☐ Net Weight      | 15.9kg (2") : 14kg                                       |
| ☐ Air Hose        | 13mm                                                     |
| *PACKING          | 1PCS/CTN/15.9kg/16.9 kg/1'<br>(2") 1PCS/CTN/14kg/15kg/1' |



- Forward: 3 Speed
- Reverse: 3 Speed
- Option: Inside Trigger

## YU-2570T8 8" ANVIL

Twin Hammer

## YU-2570T 2" ANVIL

|                   |                                                              |
|-------------------|--------------------------------------------------------------|
| ☐ Square Drive    | 1"                                                           |
| ☐ Bolt Capacity   | 2" (50mm)                                                    |
| ☐ Max Torque      | 2500FT-LB(345KG-M, 3390N-M)                                  |
| ☐ Free Speed      | 3000R.P.M.                                                   |
| ☐ Air Consumption | 8.5CFM                                                       |
| ☐ Air Inlet       | 1/2"                                                         |
| ☐ Air Pressure    | 90PSI                                                        |
| ☐ Overall Length  | 622mm (2") : 453mm                                           |
| ☐ Net Weight      | 14.6kg (2") : 13.1kg                                         |
| ☐ Air Hose        | 13mm                                                         |
| *PACKING          | 1PCS/CTN/14.6kg/15.6 kg/1'<br>(2") 1PCS/CTN/13.1kg/14.1kg/1' |



- Forward: 1 Speed
- Reverse: 1 Speed
- Option: Inside Trigger

## YU-2540PLR8 8" ANVIL

Pin Less

## YU-2540PLR 2" ANVIL

|                   |                                                         |
|-------------------|---------------------------------------------------------|
| ☐ Square Drive    | 1"                                                      |
| ☐ Bolt Capacity   | 2" (50mm)                                               |
| ☐ Max Torque      | 2000FT-LB (277KG-M, 2712N-M)                            |
| ☐ Free Speed      | 2400 R.P.M.                                             |
| ☐ Air Consumption | 8.5 CFM                                                 |
| ☐ Air Inlet       | 1/2"                                                    |
| ☐ Air Pressure    | 90 PSI                                                  |
| ☐ Overall Length  | 629 mm (2") : 445mm                                     |
| ☐ Net Weight      | 14.5kg (2") : 13kg                                      |
| ☐ Air Hose        | 13 mm                                                   |
| *PACKING          | 1PCS/CTN/14.5kg/15.5kg/1'<br>(2") 1PCS/CTN/13kg/14kg/1' |



Inside Trigger



- Forward: 4 Speed
- Reverse: 4 Speed
- Option: Inside Trigger

## YU-2530R8 8" ANVIL

Rocking Dog

## YU-2530R6 6" ANVIL

## YU-2530R 2" ANVIL

|                   |                                                                                                        |
|-------------------|--------------------------------------------------------------------------------------------------------|
| ☐ Square Drive    | 1"                                                                                                     |
| ☐ Bolt Capacity   | 1-5/8" (41mm)                                                                                          |
| ☐ Max Torque      | 1400FT-LB (193KG-M, 1895N-M)                                                                           |
| ☐ Free Speed      | 3500 R.P.M.                                                                                            |
| ☐ Air Consumption | 8.5 CFM                                                                                                |
| ☐ Air Inlet       | 1/2"                                                                                                   |
| ☐ Air Pressure    | 90 PSI                                                                                                 |
| ☐ Overall Length  | (8")590 mm (6")550 mm (2")410 mm                                                                       |
| ☐ Net Weight      | (8")13.8 kg (6")13.2 kg (2")12.1 kg                                                                    |
| ☐ Air Hose        | 13 mm                                                                                                  |
| *PACKING          | (8")2PCS/CTN/27.6kg/30.3kg/1.87'<br>(6")2PCS/CTN/26.4kg/29.1kg/1.87'<br>(2")2PCS/CTN/24.2kg/27kg/1.87' |



Inside Trigger





World Class Innovative  
Professional Pneumatic Tools  
HIGH QUALITY PRODUCTS





# Ratchet Wrench

## YU-RA38

3/8" SQ.DR. AIR RATCHET WRENCH

|                                                                                   |                 |                           |
|-----------------------------------------------------------------------------------|-----------------|---------------------------|
|  | Free Speed      | 160 R.P.M.                |
|  | Max Torque      | 90 FT-LB.                 |
|  | Square Drive    | 3/8"                      |
|  | Air Pressure    | 90 PSI                    |
|  | Air Consumption | 3.7 CFM                   |
|  | Air Inlet       | 1/4"                      |
|  | Air Hose        | 3/8"                      |
|  | Overall Length  | 254 mm                    |
|  | Net Weight      | 1.20kg                    |
|                                                                                   | *PACKING        | 20PCS/CTN/25kg/26kg/0.78' |



## YU-RA38A

3/8" SQ.DR. AIR RATCHET WRENCH  
With Handle Grip

|                                                                                   |                 |                           |
|-----------------------------------------------------------------------------------|-----------------|---------------------------|
|  | Free Speed      | 160 R.P.M.                |
|  | Max Torque      | 90 FT-LB.                 |
|  | Square Drive    | 3/8"                      |
|  | Air Pressure    | 90 PSI                    |
|  | Air Consumption | 3.7 CFM                   |
|  | Air Inlet       | 1/4"                      |
|  | Air Hose        | 3/8"                      |
|  | Overall Length  | 254 mm                    |
|  | Net Weight      | 1.20kg                    |
|                                                                                   | *PACKING        | 20PCS/CTN/25kg/26kg/0.78' |



OPTION!  
Blue handle grip



## YU-RA12

1/2" SQ.DR. AIR RATCHET WRENCH

|                                                                                     |                 |                           |
|-------------------------------------------------------------------------------------|-----------------|---------------------------|
|    | Free Speed      | 160 R.P.M.                |
|   | Max Torque      | 90 FT-LB.                 |
|  | Square Drive    | 1/2"                      |
|  | Air Pressure    | 90 PSI                    |
|  | Air Consumption | 3.7 CFM                   |
|  | Air Inlet       | 1/4"                      |
|  | Air Hose        | 3/8"                      |
|  | Overall Length  | 254 mm                    |
|  | Net Weight      | 1.25kg                    |
|                                                                                     | *PACKING        | 20PCS/CTN/25kg/26kg/0.78' |



## YU-RA12A

1/2" SQ.DR. AIR RATCHET WRENCH  
With Handle Grip

|                                                                                     |                 |                           |
|-------------------------------------------------------------------------------------|-----------------|---------------------------|
|   | Free Speed      | 160 R.P.M.                |
|  | Max Torque      | 90 FT-LB.                 |
|  | Square Drive    | 1/2"                      |
|  | Air Pressure    | 90 PSI                    |
|  | Air Consumption | 3.7 CFM                   |
|  | Air Inlet       | 1/4"                      |
|  | Air Hose        | 3/8"                      |
|  | Overall Length  | 254 mm                    |
|  | Net Weight      | 1.25kg                    |
|                                                                                     | *PACKING        | 20PCS/CTN/25kg/26kg/0.78' |



OPTION!  
Blue handle grip



## YU-RA204 1/4" SQ. DR. AIR RATCHET WRENCH

## YU-RA204A 3/8" SQ. DR. AIR RATCHET WRENCH

|                                                                                     |                 |                          |
|-------------------------------------------------------------------------------------|-----------------|--------------------------|
|  | Free Speed      | 260R.P.M.                |
|  | Max Torque      | 25FT-LB.                 |
|  | Square Drive    | 1/4" (3/8")              |
|  | Air Pressure    | 90PSI                    |
|  | Air Consumption | 5CFM                     |
|  | Air Inlet       | 1/4"                     |
|  | Air Hose        | 1/4"                     |
|  | Overall Length  | 160mm                    |
|  | Net Weight      | 0.5kg                    |
|                                                                                     | *PACKING        | 20PCS/CTN/10kg/12kg/0.4' |



YU-RA204A  
3/8" SQ. DR.

## YU-RA206 1/4" SQ. DR. AIR RATCHET WRENCH

## YU-RA206A 3/8" SQ. DR. AIR RATCHET WRENCH

|                                                                                     |                 |                         |
|-------------------------------------------------------------------------------------|-----------------|-------------------------|
|  | Free Speed      | 260R.P.M.               |
|  | Max Torque      | 20FT-LB.                |
|  | Square Drive    | 1/4" (3/8")             |
|  | Air Pressure    | 90PSI                   |
|  | Air Consumption | 6.5CFM                  |
|  | Air Inlet       | 1/4"                    |
|  | Air Hose        | 1/4"                    |
|  | Overall Length  | 130mm                   |
|  | Net Weight      | 0.44kg                  |
|                                                                                     | *PACKING        | 20PCS/CTN/9kg/10kg/0.4' |



YU-RA206A  
3/8" SQ. DR.

The ratchet wrench can be used in narrow working spaces and tighten places that other air tools can not reach on.


## YU-RA209 Air Narrow Ratchet Wrench

|                                                                                     |                    |                               |
|-------------------------------------------------------------------------------------|--------------------|-------------------------------|
|  | Free Speed         | 170 R.P.M.                    |
|  | Bolt Size Capacity | 10, 11, 12, 13, 14 mm         |
|  | Working Torque     | 11 FT-LB                      |
|  | Max Torque         | 18 FT-LB                      |
|  | Air Pressure       | 90 PSI                        |
|  | Air Consumption    | 7.5 CFM                       |
|  | Overall Length     | 340 mm                        |
|  | Air Inlet          | 1/4"                          |
|  | Air Hose           | 3/8"                          |
|  | Net weight         | 1.8 kgs                       |
|                                                                                     | *PACKING           | 10PC/CTN/18.7 kg/21.6 kg/1.4' |

- Rear Exhaust
- Remove: First, Loosen bolt by wrench then take bolt out with air ratchet
- Fasten: Push trigger to position the bolt then lock it with torque wrench.

Model no :

- YU-RA209-10 Bolt Size Capacity: 10mm
- YU-RA209-11 Bolt Size Capacity: 11mm
- YU-RA209-12 Bolt Size Capacity: 12mm
- YU-RA209-13 Bolt Size Capacity: 13mm
- YU-RA209-14 Bolt Size Capacity: 14mm

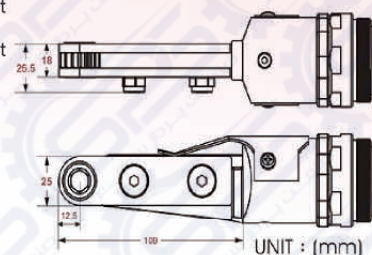

UNIT : (mm)



# Air Screw Driver

## YU-5MA Double Hammer

|                                                                                   |                 |                          |
|-----------------------------------------------------------------------------------|-----------------|--------------------------|
|  | Bolt Capacity   | 5-7 mm                   |
|  | Max Torque      | 25-30 N.m.               |
|  | Free Speed      | 9000 R.P.M.              |
|  | Overall Length  | 190 mm                   |
|  | Air Consumption | 2 CFM                    |
|  | Air Pressure    | 90 PSI                   |
|  | Net Weight      | 0.83 kg                  |
|                                                                                   | *PACKING        | 25PCS/CTN/24kg/25kg/0.8' |



## YU-9MA Double Hammer

|                                                                                   |                 |                          |
|-----------------------------------------------------------------------------------|-----------------|--------------------------|
|  | Bolt Capacity   | 6-10 mm                  |
|  | Max Torque      | 80 N.m.                  |
|  | Free Speed      | 8000 R.P.M.              |
|  | Overall Length  | 210 mm                   |
|  | Air Consumption | 2.5 CFM                  |
|  | Air Pressure    | 90 PSI                   |
|  | Net Weight      | 1.1 kg                   |
|                                                                                   | *PACKING        | 25PCS/CTN/25kg/26kg/1.1' |



## YU-8MA Double Hammer

|                                                                                     |                 |                           |
|-------------------------------------------------------------------------------------|-----------------|---------------------------|
|   | Bolt Capacity   | 8-10 mm                   |
|  | Max Torque      | 50 N.m.                   |
|  | Free Speed      | 8500 R.P.M.               |
|  | Overall Length  | 210 mm                    |
|  | Air Consumption | 2.5 CFM                   |
|  | Air Pressure    | 90 PSI                    |
|  | Net Weight      | 1.1 kg                    |
|                                                                                     | *PACKING        | 25PCS/CTN/25kg/26 kg/1.1' |



## YU-8MA-A Double Hammer

|                                                                                     |                 |                         |
|-------------------------------------------------------------------------------------|-----------------|-------------------------|
|   | Bolt Capacity   | 8-10 mm                 |
|  | Max Torque      | 50N.m.                  |
|  | Free Speed      | 8500R.P.M.              |
|  | Overall Length  | 210mm                   |
|  | Air Consumption | 2.5 CFM                 |
|  | Air Pressure    | 90PSI                   |
|  | Net Weight      | 1.1 kg                  |
|                                                                                     | *PACKING        | 25PCS/CTN/25kg/26kg/1.1 |



## YU-10MA Twin Hammer

|                                                                                     |                 |                          |
|-------------------------------------------------------------------------------------|-----------------|--------------------------|
|  | Bolt Capacity   | 8-12 mm                  |
|  | Max Torque      | 40-130 N.m.              |
|  | Free Speed      | 8500 R.P.M.              |
|  | Overall Length  | 200 mm                   |
|  | Air Consumption | 2.5 CFM                  |
|  | Air Pressure    | 90 PSI                   |
|  | Net Weight      | 1.1 kg                   |
|                                                                                     | *PACKING        | 25PCS/CTN/25kg/26kg/1.1' |



## YU-10MA-A Twin Hammer

|                                                                                     |                 |                          |
|-------------------------------------------------------------------------------------|-----------------|--------------------------|
|  | Bolt Capacity   | 8-12 mm                  |
|  | Max Torque      | 40-130 N.m.              |
|  | Free Speed      | 8500 R.P.M.              |
|  | Overall Length  | 200 mm                   |
|  | Air Consumption | 2.5 CFM                  |
|  | Air Pressure    | 90 PSI                   |
|  | Net Weight      | 1.1 kg                   |
|                                                                                     | *PACKING        | 25PCS/CTN/25kg/26kg/1.1' |



## YU-SR359 Double Hammer

|                                                                                     |                 |                              |
|-------------------------------------------------------------------------------------|-----------------|------------------------------|
|  | Bolt Capacity   | 6 mm                         |
|  | Max Torque      | 100FT-LB<br>(14KG-M, 136N-M) |
|  | Free Speed      | 8000R.P.M.                   |
|  | Overall Length  | 199mm                        |
|  | Air Consumption | 3.5CFM                       |
|  | Air Pressure    | 90PSI                        |
|  | Net Weight      | 1.04kg                       |
|                                                                                     | *PACKING        | 20PCS/CTN/22kg/25kg/1'       |



## YU-SR361 Twin Hammer

|                                                                                     |                 |                              |
|-------------------------------------------------------------------------------------|-----------------|------------------------------|
|  | Bolt Capacity   | 8 mm                         |
|  | Max Torque      | 125FT-LB<br>(17KG-M, 170N-M) |
|  | Free Speed      | 8000R.P.M.                   |
|  | Overall Length  | 200mm                        |
|  | Air Consumption | 3.5CFM                       |
|  | Air Pressure    | 90PSI                        |
|  | Net Weight      | 1.04kg                       |
|                                                                                     | *PACKING        | 20PCS/CTN/22kg/25kg/1'       |





# Air Screw Driver

## YU-SR201T

Twin Hammer

|                                                                                   |                 |                          |
|-----------------------------------------------------------------------------------|-----------------|--------------------------|
|  | Bolt Capacity   | 10-12 mm                 |
|  | Max Torque      | 40-130 N.m.              |
|  | Free Speed      | 8500 R.P.M.              |
|  | Overall Length  | 185 mm                   |
|  | Air Consumption | 3.1 CFM                  |
|  | Air Pressure    | 90 PSI                   |
|  | Net Weight      | 1.2 kg                   |
|                                                                                   | *PACKING        | 10PCS/CTN/15kg/16kg/1.1' |



## YU-SR202

Double Hammer

|                                                                                   |                 |                          |
|-----------------------------------------------------------------------------------|-----------------|--------------------------|
|  | Bolt Capacity   | 8-10 mm                  |
|  | Max Torque      | 50 N.m.                  |
|  | Free Speed      | 5000 R.P.M.              |
|  | Overall Length  | 225 mm                   |
|  | Air Consumption | 2.5 CFM                  |
|  | Air Pressure    | 90 PSI                   |
|  | Net Weight      | 1.3 kg                   |
|                                                                                   | *PACKING        | 15PCS/CTN/21kg/22kg/1.1' |



## YU-SR0941P

Pin clutch

|                                                                                     |                 |                            |
|-------------------------------------------------------------------------------------|-----------------|----------------------------|
|    | Bolt Capacity   | 1/4" ~ 1/2" (6-12 mm)      |
|    | Max Torque      | 160 FT-LB (22KG-M, 216N-M) |
|    | Free Speed      | 10000 R.P.M.               |
|   | Air Consumption | 3.4 CFM                    |
|  | Air Inlet       | 1/4"                       |
|  | Air Pressure    | 90 PSI                     |
|  | Overall Length  | 149 mm                     |
|  | Net Weight      | 1.3 kg                     |
|  | Air Hose        | 10 mm                      |
|                                                                                     | *PACKING        | 10PCS/CTN/13kg/14kg/1'     |



## YU-SR0903P

Pin clutch

|                                                                                     |                 |                            |
|-------------------------------------------------------------------------------------|-----------------|----------------------------|
|    | Bolt Capacity   | 1/4" ~ 1/2" (6-12 mm)      |
|    | Max Torque      | 165 FT-LB (23KG-M, 222N-M) |
|    | Free Speed      | 10000 R.P.M.               |
|   | Air Consumption | 3.7 CFM                    |
|  | Air Inlet       | 1/4"                       |
|  | Air Pressure    | 90 PSI                     |
|  | Overall Length  | 163 mm                     |
|  | Net Weight      | 1.6 kg                     |
|  | Air Hose        | 10 mm                      |
|                                                                                     | *PACKING        | 10PCS/CTN/16kg/17kg/1'     |



## YU-SR0905T

Twin Hammer

|                                                                                     |                 |                           |
|-------------------------------------------------------------------------------------|-----------------|---------------------------|
|  | Bolt Capacity   | 1/4" ~ 1/2" (6-12mm)      |
|  | Max Torque      | 200FT-LB (28KG-M, 270N-M) |
|  | Free Speed      | 10000 R.P.M.              |
|  | Air Consumption | 3.7 CFM                   |
|  | Air Inlet       | 1/4"                      |
|  | Air Pressure    | 90 PSI                    |
|  | Overall Length  | 149 mm                    |
|  | Net Weight      | 1.7 kg                    |
|  | Air Hose        | 10 mm                     |
|                                                                                     | *PACKING        | 10PCS/CTN/17kg/18kg/1'    |



## YU-SR0980T

Twin Hammer

|                                                                                     |                 |                          |
|-------------------------------------------------------------------------------------|-----------------|--------------------------|
|  | Bolt Capacity   | 1/4"~1/2" (6-12mm)       |
|  | Max Torque      | 200FT-LB(28KG-M, 270N-M) |
|  | Free Speed      | 10000R.P.M.              |
|  | Air Consumption | 3.7 CFM                  |
|  | Air Inlet       | 1/4"                     |
|  | Air Pressure    | 90PSI                    |
|  | Overall Length  | 172mm                    |
|  | Net Weight      | 1.2kg                    |
|  | Air Hose        | 10mm                     |
|                                                                                     | *PACKING        | 10PCS/CTN/12kg/13kg/1'   |



## YU-SR360

Double Hammer

|                                                                                     |                 |                          |
|-------------------------------------------------------------------------------------|-----------------|--------------------------|
|  | Bolt Capacity   | 6 mm                     |
|  | Max Torque      | 115FT-LB(16KG-M, 156N-M) |
|  | Free Speed      | 9000R.P.M.               |
|  | Air Consumption | 4.7 CFM                  |
|  | Air Pressure    | 90PSI                    |
|  | Overall Length  | 155mm                    |
|  | Net Weight      | 1.18kg                   |
|                                                                                     | *PACKING        | 10PCS/CTN/12kg/14kg/0.9' |



## YU-SR362

Twin Hammer

|                                                                                     |                 |                          |
|-------------------------------------------------------------------------------------|-----------------|--------------------------|
|  | Bolt Capacity   | 8 mm                     |
|  | Max Torque      | 145FT-LB(20KG-M, 197N-M) |
|  | Free Speed      | 9000R.P.M.               |
|  | Air Consumption | 4.7 CFM                  |
|  | Air Pressure    | 90PSI                    |
|  | Overall Length  | 155mm                    |
|  | Net Weight      | 1.18kg                   |
|                                                                                     | *PACKING        | 10PCS/CTN/12kg/14kg/0.9' |





# Air Adjustable Clutch Screw Driver

With push-start device, all parts stop working automatically while reaching the torque.  
Rear Exhaust, low noise, low air consumption and energy saving.



- Push start
- Air shut off
- Rear exhaust with muffler

## YU-SR203

1/4" Torque Control Type Air Screw Driver

|                                                                                   |                 |                             |
|-----------------------------------------------------------------------------------|-----------------|-----------------------------|
|  | Bolt Capacity   | 2 mm                        |
|  | Max Torque      | 0.2 - 0.35 Nm               |
|  | Free Speed      | 2500 R.P.M.                 |
|  | Overall Length  | 180 mm                      |
|  | Air Consumption | 2.5 CFM                     |
|  | Air Pressure    | 90 PSI                      |
|  | Air Inlet       | 1/4"                        |
|  | Net Weight      | 0.35 kgs (0.77 lbs)         |
|  | *PACKING        | 10 PCS/CTN/3.6kg/6.7kg/1.1' |



- Push start
- Air shut off
- Rear exhaust with muffler

## YU-SR204

1/4" Torque Control Type Air Screw Driver

|                                                                                   |                 |                               |
|-----------------------------------------------------------------------------------|-----------------|-------------------------------|
|  | Bolt Capacity   | 2.5 mm                        |
|  | Max Torque      | 0.35 - 1.0 Nm                 |
|  | Free Speed      | 800 R.P.M.                    |
|  | Overall Length  | 190 mm                        |
|  | Air Consumption | 2.5 CFM                       |
|  | Air Pressure    | 90 PSI                        |
|  | Air Inlet       | 1/4"                          |
|  | Net Weight      | 0.37 kgs (0.82 lbs)           |
|  | *PACKING        | 10 PCS/CTN/18.7kg/21.6kg/1.4' |



## YU-SR205

1/4" Straight ADJ. Air Screw Driver

|                                                                                     |                 |                           |
|-------------------------------------------------------------------------------------|-----------------|---------------------------|
|  | Max Torque      | 20-115 In-lbs             |
|  | Free Speed      | 1800 R.P.M.               |
|  | Overall Length  | 265 mm                    |
|  | Air Consumption | 5 CFM                     |
|  | Air Pressure    | 90 PSI                    |
|  | Net Weight      | 1.16 kgs (2.55 lbs)       |
|  | *PACKING        | 10 PCS/CTN/13kg/14kg/0.6' |



## YU-SR206

1/4" Straight ADJ. Air Screw Driver

|                                                                                     |                 |                           |
|-------------------------------------------------------------------------------------|-----------------|---------------------------|
|  | Max Torque      | 20-145 In-lbs             |
|  | Free Speed      | 700 R.P.M.                |
|  | Overall Length  | 140 mm                    |
|  | Air Consumption | 5 CFM                     |
|  | Air Pressure    | 90 PSI                    |
|  | Net Weight      | 1.16 kgs (2.55 lbs)       |
|  | *PACKING        | 10 PCS/CTN/13kg/14kg/0.6' |



## YU-SR211

1/4" Pistol Clutch Type Air Screw Driver

|                                                                                     |                 |                               |
|-------------------------------------------------------------------------------------|-----------------|-------------------------------|
|  | Bolt Capacity   | 5 mm                          |
|  | Max Torque      | 3.8 FT-LB                     |
|  | Free Speed      | 2200 R.P.M.                   |
|  | Overall Length  | 235 mm                        |
|  | Air Consumption | 5 CFM                         |
|  | Air Pressure    | 90 PSI                        |
|  | Air Inlet       | 1/4"                          |
|  | Net Weight      | 0.8 kgs (1.76 lbs)            |
|  | *PACKING        | 20 PCS/CTN/16kg /21.3kg /1.1' |



## YU-SR212

1/4" Straight Clutch Type Air Screw Driver

|                                                                                     |                 |                                |
|-------------------------------------------------------------------------------------|-----------------|--------------------------------|
|  | Bolt Capacity   | 4 mm                           |
|  | Max Torque      | 2.2 FT-LB                      |
|  | Free Speed      | 1700 R.P.M.                    |
|  | Overall Length  | 235 mm                         |
|  | Air Consumption | 4.5 CFM                        |
|  | Air Pressure    | 90 PSI                         |
|  | Air Inlet       | 1/4"                           |
|  | Net Weight      | 0.61 kgs (1.34 lbs)            |
|  | *PACKING        | 20 PCS/CTN/12kg /17.3kg / 1.1' |



# Air Adjustable Clutch Screw Driver



## YU-SR207

1/4" Pistol ADJ. Air Screw Driver

|                                                                                   |                 |                         |
|-----------------------------------------------------------------------------------|-----------------|-------------------------|
|  | Max Torque      | 20-115 IN-LB            |
|  | Free Speed      | 1800 R.P.M.             |
|  | Overall Length  | 215 mm                  |
|  | Air Consumption | 5 CFM                   |
|  | Air Pressure    | 90 PSI                  |
|  | Net Weight      | 1.23 kgs(2.7 lbs)       |
|                                                                                   | *PACKING        | 10 PCS/CTN/15kg/16kg/1' |



## YU-SR208

1/4" Pistol ADJ. Air Screw Driver

|                                                                                   |                 |                         |
|-----------------------------------------------------------------------------------|-----------------|-------------------------|
|  | Max Torque      | 45-145 IN-LB            |
|  | Free Speed      | 700 R.P.M.              |
|  | Overall Length  | 220 mm                  |
|  | Air Consumption | 7.5 CFM                 |
|  | Air Pressure    | 90 PSI                  |
|  | Net Weight      | 1.23 kgs (2.7 lbs)      |
|                                                                                   | *PACKING        | 10 PCS/CTN/15kg/16kg/1' |



## YU-SR209

1/4" Pistol Clutch Type Air Screw Driver

|                                                                                     |                 |                           |
|-------------------------------------------------------------------------------------|-----------------|---------------------------|
|  | Bolt Capacity   | 6-8 mm                    |
|  | Max Torque      | 4.4 FT-LB                 |
|  | Free Speed      | 1500 R.P.M.               |
|  | Overall Length  | 240 mm                    |
|  | Air Consumption | 8 CFM                     |
|  | Air Pressure    | 90 PSI                    |
|  | Air Inlet       | 1/4"                      |
|  | Net Weight      | 1.4 kgs (3.08 lbs)        |
|                                                                                     | *PACKING        | 10 PCS/CTN/14kg/18kg/1.7' |



## YU-SR210

1/4" Pistol Clutch Type Air Screw Driver

|                                                                                     |                 |                            |
|-------------------------------------------------------------------------------------|-----------------|----------------------------|
|  | Bolt Capacity   | 6-8 mm                     |
|  | Max Torque      | 5.1 FT-LB                  |
|  | Free Speed      | 400 R.P.M.                 |
|  | Overall Length  | 240 mm                     |
|  | Air Consumption | 7.5 CFM                    |
|  | Air Pressure    | 90 PSI                     |
|  | Air Inlet       | 1/4"                       |
|  | Net Weight      | 1.49 kgs (3.28 lbs)        |
|                                                                                     | *PACKING        | 10 PCS/CTN/15 kg/18kg/1.7' |

■ Handle exhaust with muffler



## YU-SR213

1/4" Pistol Clutch Type Air Screw Driver

|                                                                                     |                 |                             |
|-------------------------------------------------------------------------------------|-----------------|-----------------------------|
|  | Bolt Capacity   | 4 mm                        |
|  | Max Torque      | 2.2 FT-LB                   |
|  | Free Speed      | 2500 R.P.M.                 |
|  | Overall Length  | 200 mm                      |
|  | Air Consumption | 7.5 CFM                     |
|  | Air Pressure    | 90 PSI                      |
|  | Air Inlet       | 1/4"                        |
|  | Net Weight      | 1.04 kgs (2.29 lbs)         |
|                                                                                     | *PACKING        | 10 PCS/CTN/10.4kg/14kg/1.1' |

■ Handle exhaust with muffler



## YU-SR214

1/4" Pistol Clutch Type Air Screw Driver

|                                                                                     |                 |                               |
|-------------------------------------------------------------------------------------|-----------------|-------------------------------|
|  | Bolt Capacity   | 6 mm                          |
|  | Max Torque      | 6 FT-LB                       |
|  | Free Speed      | 600 R.P.M.                    |
|  | Overall Length  | 230 mm                        |
|  | Air Consumption | 7.5 CFM                       |
|  | Air Pressure    | 90 PSI                        |
|  | Air Inlet       | 1/4"                          |
|  | Net Weight      | 1.15 kgs (2.54 lbs)           |
|                                                                                     | *PACKING        | 10 PCS/CTN/11.6kg/15.5kg/1.7' |



# Air Drill

## YU-DR301

3/8" Air Drill

|                 |                          |
|-----------------|--------------------------|
| Drilling Cap    | 3/8"                     |
| Free Speed      | 3000 R.P.M.              |
| Air Pressure    | 90 PSI                   |
| Overall Length  | 7" (180mm)               |
| Air Inlet       | 1/4"                     |
| Air Hose        | 3/8"                     |
| Air Consumption | 6CFM (170 l/min)         |
| Net Weight      | 0.9 kg                   |
| Air Compressor  | 2 HP                     |
| *PACKING        | 20PCS/CTN/20kg/21kg/1.4' |



## YU-DR401

1/2" Air Drill

|                 |                          |
|-----------------|--------------------------|
| Drilling Cap    | 1/2"                     |
| Free Speed      | 800 R.P.M.               |
| Air Pressure    | 90 PSI                   |
| Overall Length  | 8" (203mm)               |
| Air Inlet       | 1/4"                     |
| Air Hose        | 3/8"                     |
| Air Consumption | 8CFM (226 l/min)         |
| Net Weight      | 1.6 kg                   |
| Air Compressor  | 2 HP                     |
| *PACKING        | 10PCS/CTN/18kg/19kg/0.7' |



## YU-DR302

3/8" Reversible Air Drill

|                 |                          |
|-----------------|--------------------------|
| Drilling Cap    | 3/8"                     |
| Free Speed      | 1800 R.P.M.              |
| Air Pressure    | 90 PSI                   |
| Overall Length  | 7" (180mm)               |
| Air Inlet       | 1/4"                     |
| Air Hose        | 3/8"                     |
| Air Consumption | 6CFM (170 l/min)         |
| Net Weight      | 1.1 kg                   |
| Air Compressor  | 2 HP                     |
| *PACKING        | 20PCS/CTN/24kg/25kg/1.4' |



## YU-DR402

1/2" Reversible Air Drill

|                 |                          |
|-----------------|--------------------------|
| Drilling Cap    | 1/2"                     |
| Free Speed      | 800 R.P.M.               |
| Overall Length  | 8" (203 mm)              |
| Air Inlet       | 1/4"                     |
| Air Hose        | 3/8"                     |
| Air Consumption | 8 CFM (226 l/min)        |
| Net Weight      | 1.6 kg                   |
| Air Compressor  | 2 HP                     |
| *PACKING        | 10PCS/CTN/18kg/19kg/0.7' |



### OPTION: Key Less

YU-DR301KL:3/8" Air Drill with Key Less

YU-DR302KL:3/8" Reversible Air Drill with Key Less

### Key Less

YU-DR401KL:1/2" Air Drill with Key Less

YU-DR402KL:1/2" Reversible Air Drill with Key Less

## YU-DR303

3/8" Air Straight Drill (3-Gear)

|                 |                         |
|-----------------|-------------------------|
| Drilling cap    | 3/8"                    |
| Free speed      | 2500 R.P.M.             |
| Air Pressure    | 90 PSI                  |
| Overall Length  | 230 mm                  |
| Air Inlet       | 1/4"                    |
| Air Hose        | 3/8"                    |
| Air Consumption | 4.5 CFM                 |
| Net Weight      | 1 kgs                   |
| *PACKING        | 20PC/CTN/19 kg/20 kg/1' |



## YU-DR218

3/8" Air Angle Reversible Drill

|                 |                          |
|-----------------|--------------------------|
| Drilling Cap    | 3/8"                     |
| Free Speed      | 1800 R.P.M.              |
| Overall Length  | 210 mm                   |
| Air Inlet       | 1/4"                     |
| Air Hose        | 3/8"                     |
| Air Consumption | 10.6 CFM                 |
| Net Weight      | 1.1 kg                   |
| Air Compressor  | 2 HP                     |
| *PACKING        | 10PCS/CTN/13kg/14kg/0.8' |



## YU-DR217

3/8" Air Angle Drill

|                 |                          |
|-----------------|--------------------------|
| Drilling cap    | 3/8"                     |
| Free speed      | 1900 R.P.M.              |
| Overall Length  | 190 mm                   |
| Air Inlet       | 1/4"                     |
| Air Hose        | 3/8"                     |
| Air Consumption | 9.9 CFM                  |
| Net Weight      | 0.96 kg                  |
| Air Compressor  | 2 HP                     |
| *PACKING        | 20PCS/CTN/20kg/21kg/1.2' |



## YU-DR219

Air Spot Drill

|                 |                           |
|-----------------|---------------------------|
| Bit Size        | 6.5 or 8 mm               |
| Free speed      | 1800 R.P.M.               |
| Air Pressure    | 90 PSI                    |
| Overall Length  | 200 mm                    |
| Air Inlet       | 1/4"                      |
| Air Hose        | 3/8"                      |
| Air Consumption | 4.5 CFM                   |
| Net Weight      | 1.6 kgs                   |
| *PACKING        | 10PC/CTN/15 kg/16 kg/1.4' |





# Air Micro Die Grinder

## YU-MG056

|                 |                          |
|-----------------|--------------------------|
| Max Free Speed  | 56000 R.P.M.             |
| Collect Size    | 3/32", 1/8" or 3 mm      |
| Length          | 156 mm                   |
| Net Weight      | 0.21 kg                  |
| Air Inlet       | 1/4"                     |
| Air Hose Size   | 5 mm                     |
| Air Consumption | 7 CFM                    |
| Air Pressure    | 90 PSI                   |
| *PACKING        | 20PCS/CTN/6.6kg/7kg/1.1' |



## YU-MG056K YU-MG070K

Contents:

|         |                                                       |
|---------|-------------------------------------------------------|
| 1PC     | YU-MG056 or YU-MG070                                  |
| 10PCS   | Grinding Stone: 3,4,5,6,7,8 mm<br>3*3,3*6,13*4T,16*4T |
| 1PC     | Oil Pot                                               |
| 2PC     | 9mm Spanner                                           |
| 1PC     | Nipple                                                |
| 1PC     | Mini Oilier                                           |
| 1PC     | Plastic Case                                          |
| PACKING | 20 Sets/CTN/18kgs/19kgs /2.65'                        |



## YU-MG070

|                 |                          |
|-----------------|--------------------------|
| Max Free Speed  | 70000 R.P.M.             |
| Collect Size    | 3/32", 1/8" or 3 mm      |
| Length          | 156 mm                   |
| Net Weight      | 0.21 kg                  |
| Air Inlet       | 1/4"                     |
| Air Hose Size   | 5 mm                     |
| Air Consumption | 7 CFM                    |
| Air Pressure    | 90 PSI                   |
| *PACKING        | 20PCS/CTN/6.6kg/7kg/1.1' |




## YU-MG060

|                |                          |
|----------------|--------------------------|
| Max Free Speed | 60000R.P.M.              |
| Collect Size   | 1/8 or 3mm               |
| Length         | 140mm                    |
| Net Weight     | 0.13kg                   |
| Air Inlet      | 1/4"                     |
| Air Hose Size  | 6.35mm                   |
| Air Pressure   | 90PSI                    |
| *PACKING       | 20PCS/CTN/9kg/10kg/1.63' |



## YU-MG035

|                 |                            |
|-----------------|----------------------------|
| Max Free Speed  | 35000 R.P.M.               |
| Collect Size    | 3 mm, 6mm or 1/8", 1/4"    |
| Length          | 175mm                      |
| Net Weight      | 0.35 kg                    |
| Air Inlet       | 1/4"                       |
| Air Hose Size   | 5 mm                       |
| Air Consumption | 8.83 CFM                   |
| Air Pressure    | 90 PSI                     |
| *PACKING        | 20PCS/CTN/10kg/10.5kg/0.9' |



## YU-MG062

|                |                          |
|----------------|--------------------------|
| Max Free Speed | 60000R.P.M.              |
| Collect Size   | 1/8 or 3mm               |
| Length         | 120mm                    |
| Net Weight     | 0.12kg                   |
| Air Inlet      | 1/4"                     |
| Air Hose Size  | 6.35mm                   |
| Air Pressure   | 90PSI                    |
| *PACKING       | 20PCS/CTN/9kg/10kg/1.63' |



## YU-MG023 YU-MG023K

|                 |                                                                   |
|-----------------|-------------------------------------------------------------------|
| Max Free Speed  | 23000 R.P.M.                                                      |
| Collect Size    | 30 mm                                                             |
| Length          | 160 mm                                                            |
| Net Weight      | 0.3 kg                                                            |
| Air Inlet       | 1/4"                                                              |
| Air Hose Size   | 5 mm                                                              |
| Air Consumption | 7 CFM                                                             |
| Air Pressure    | 90 PSI                                                            |
| *PACKING        | 20 PCS/CTN/10.5kg/11kg/0.9' (YU-MG023K) 20PCS/CTN/19kg/20kg/2.65' |



## YU-GR3H-5

|                |                           |
|----------------|---------------------------|
| Max Free Speed | 14600 R.P.M.              |
| Collect Size   | 6 mm                      |
| Length         | 342 mm                    |
| Net Weight     | 1.3 kg                    |
| Air Inlet      | 1/4"                      |
| Air Hose Size  | 9.5 mm                    |
| Air Pressure   | 90PSI                     |
| *PACKING       | 15PCS/CTN/25kg/26kg/2.19' |





# 0.3HP Family - Looking Air Tools - Grinder, Sander

## YU-GR1101H

1/4" H.D. DIE GRINDER  
(0.3 HP, REAR EXHAUST)

|                 |                             |
|-----------------|-----------------------------|
| Free Speed      | 28000 R.P.M.                |
| Collect Size    | 1/4" or 6 mm                |
| Overall Length  | 160 mm                      |
| Air Inlet       | 1/4"                        |
| Air Consumption | 3.5 CFM                     |
| Net Weight      | 0.37 kg                     |
| *PACKING        | 20PCS/CTN/7.4kg/8.4kg/0.55' |



## YU-GR1101HK

36 PCS DIE GRINDER TOOL KIT

Contents:

|          |                                                             |
|----------|-------------------------------------------------------------|
| 1 PC     | YU-GR1101H (collect size :1/4" or 6mm)                      |
| 1 PC     | Collect (1/8" or 3mm)                                       |
| 5 PC     | Shake Stone (1/8" or 3mm)                                   |
| 5 PC     | Shake Stone ( 1/4" or 6mm)                                  |
| 2 PC     | Spanner                                                     |
| 1 PC     | Nipple                                                      |
| 4 PC     | Sanding Drum ( 1", 3/4", 1/2", 3/8")                        |
| 16 PC    | Abrasive sleeve<br>1", 3/4" 1/2", 3/8" (4 pcs of each size) |
| 1 PC     | Blow case                                                   |
| *PACKING | 10PCS/CTN/12 kgs/13 kgs/0.9'                                |

## YU-GR1102H

1" EXTENDED DIE GRINDER  
(0.3 HP, REAR EXHAUST)

|                 |                              |
|-----------------|------------------------------|
| Free Speed      | 28000 R.P.M.                 |
| Collect Size    | 1/4" or 6mm                  |
| Overall Length  | 190 mm                       |
| Air Inlet       | 1/4"                         |
| Air Consumption | 3.5 CFM                      |
| Net Weight      | 0.49 kg                      |
| *PACKING        | 20PCS/CTN/9.8kg/10.8kg/0.85' |



## YU-GR1103H

3" EXTENDED DIE GRINDER  
(0.3 HP, REAR EXHAUST)

|                 |                           |
|-----------------|---------------------------|
| Free Speed      | 28000 R.P.M.              |
| Collect Size    | 1/4" or 6 mm              |
| Overall Length  | 235 mm                    |
| Air Inlet       | 1/4"                      |
| Air Consumption | 3.5 CFM                   |
| Net Weight      | 0.55 kg                   |
| *PACKING        | 20PCS/CTN/11kg/12kg/0.85' |



## YU-GR1106H

1/4" H.D. 90° ANGLE DIE GRINDER  
(0.3 HP, REAR EXHAUST)

|                 |                              |
|-----------------|------------------------------|
| Free Speed      | 20000 R.P.M.                 |
| Collect Size    | 1/4" or 6 mm                 |
| Overall Length  | 160 mm                       |
| Air Inlet       | 1/4"                         |
| Air Consumption | 3.5 CFM                      |
| Net Weight      | 0.49 kg                      |
| *PACKING        | 20PCS/CTN/9.8kg/10.8kg/0.65' |



## YU-GR1104H

5" EXTENDED DIE GRINDER  
(0.3 HP, REAR EXHAUST)

|                 |                               |
|-----------------|-------------------------------|
| Free Speed      | 28000 R.P.M.                  |
| Collect Size    | 1/4" or 6mm                   |
| Overall Length  | 285 mm                        |
| Air Inlet       | 1/4"                          |
| Air Consumption | 3.5 CFM                       |
| Net Weight      | 0.66 kg                       |
| *PACKING        | 20PCS/CTN/13.2kg/14.2kg/0.85' |



## YU-GR1059H

105° ANGLE DIE GRINDER  
(0.3 HP, REAR EXHAUST)

|                 |                               |
|-----------------|-------------------------------|
| Free Speed      | 15000 R.P.M.                  |
| Collect Size    | 1/4" or 6 mm                  |
| Overall Length  | 175 mm                        |
| Air Inlet       | 1/4"                          |
| Air Consumption | 3.5 CFM                       |
| Net Weight      | 0.56 kg                       |
| *PACKING        | 20PCS/CTN/10.5kg/11.5kg/0.65' |





## 0.3/0.9 HP Family - Looking Air Tools - Grinder, Sander, Cutter



### YU-GR1154H

90° 2" H.D. ANGLE SANDER  
(0.3 HP, REAR EXHAUST)

|                 |                           |
|-----------------|---------------------------|
| Free Speed      | 15000 R.P.M.              |
| Overall Length  | 141 mm                    |
| Air Inlet       | 1/4"                      |
| Air Consumption | 3.5 CFM                   |
| Net Weight      | 0.48 kg                   |
| Pad Size        | 2"                        |
| *PACKING        | 20PCS/CTN/10kg/11kg/0.65' |



### YU-GR1054H

105° 2" H.D. ANGLE SANDER  
(0.3 HP, REAR EXHAUST)

|                 |                               |
|-----------------|-------------------------------|
| Free Speed      | 15000 R.P.M.                  |
| Overall Length  | 175 mm                        |
| Air Inlet       | 1/4"                          |
| Air Consumption | 3.5 CFM                       |
| Net Weight      | 0.48 kg                       |
| Pad Size        | 2"                            |
| *PACKING        | 20PCS/CTN/11.2kg/12.2kg/0.65' |



### YU-GR1108H

90° 2" H.D. ANGLE ORBITAL SANDER  
(0.3 HP, REAR EXHAUST)

|                 |                              |
|-----------------|------------------------------|
| Free Speed      | 15000 R.P.M.                 |
| Overall Length  | 147 mm                       |
| Air Inlet       | 1/4"                         |
| Air Consumption | 3.5 CFM                      |
| Net Weight      | 0.62 kg                      |
| Pad Size        | 2"                           |
| *PACKING        | 20PCS/CTN/12.5kg/13.5kg/1.5' |



### YU-GR9001

DIE GRINDER  
(0.9 HP, REAR EXHAUST)

|                 |                              |
|-----------------|------------------------------|
| Free Speed      | 18000 R.P.M.                 |
| Collect Size    | 1/4" or 6 mm                 |
| Overall Length  | 185 mm                       |
| Air Inlet       | 1/4"                         |
| Air Consumption | 3.8 CFM                      |
| Net Weight      | 0.71 kg                      |
| *PACKING        | 20PCS/CTN/14.2kg/15.2kg/0.8' |



### YU-GR9055

105° ANGLE GRINDER  
(0.9 HP, REAR EXHAUST)

|                 |                          |
|-----------------|--------------------------|
| Free Speed      | 9000 R.P.M.              |
| Overall Length  | 170 mm                   |
| Air Inlet       | 1/4"                     |
| Air Consumption | 3.8 CFM                  |
| Net Weight      | 1.16 kg                  |
| Pad Size        | 4" Grinding Wheel        |
| *PACKING        | 10PCS/CTN/12kg/13kg/0.9' |



### YU-CT001

3" Air Cut-Off Tool  
(0.9 HP, REAR EXHAUST)

|                 |                           |
|-----------------|---------------------------|
| Cutting Wheel   | 3"                        |
| Free Speed      | 20000 R.P.M.              |
| Air Consumption | 5 CFM                     |
| Air Pressure    | 90 PSI                    |
| Air Inlet       | 1/4"                      |
| Hose Size       | 3/8"                      |
| Overall Length  | 190 mm                    |
| Net Weight      | 0.8 Kgs                   |
| *PACKING        | 20 PCS/CTN/16kg/17kg/1.5" |

## 0.5 HP Family - Looking Air Tools - Grinder, Cutter



### YU-GR2255 (13,000 RPM)

4" Reversible Air Axial Grinder

### YU-CT2255 (15,000 RPM)

4" Reversible Air Axial Cutter

|                          |                        |
|--------------------------|------------------------|
| Free Speed               | 13000 / 15000 R.P.M.   |
| Overall Length           | 234 mm                 |
| Air Inlet                | 1/4"                   |
| Min. Air Hose Size       | 10 mm                  |
| Air Consumption          | 3.6 CFM                |
| Net Weight               | 1.1 kg                 |
| Grinding / Cutting Wheel | 4"                     |
| *PACKING                 | 12PCS/CTN/18kg/19kg/2' |



### YU-CT2254 (15,000 RPM)

4" Extended Reversible Air Axial Cutter

|                    |                            |
|--------------------|----------------------------|
| Free Speed         | 15000 R.P.M.               |
| Overall Length     | 376 mm                     |
| Air Inlet          | 1/4"                       |
| Min. Air Hose Size | 10 mm                      |
| Air Consumption    | 3.6 CFM                    |
| Net Weight         | 1.4 kg                     |
| Cutting Wheel      | 4"                         |
| *PACKING           | 12PCS/CTN/20.5kg/21.5kg/2' |



# 0.5HP Low Noise Family-Looking Air Tools - Grinder, Sander



## YU-GR2200

Low Noise Air Die Grinder

|                    |                          |
|--------------------|--------------------------|
| Free Speed         | 22,000 R.P.M.            |
| Collet Size        | 1/4" or 6 mm             |
| Overall Length     | 178 mm                   |
| Air Inlet          | 1/4"                     |
| Min. Air Hose Size | 10 mm                    |
| Air Consumption    | 3.1 CFM                  |
| Net Weight         | 0.6 kg                   |
| *Packing           | 12PCS/CTN/9kg/9.8kg/0.8' |



## YU-GR2203

Low Noise 3" Air Extension Die Grinder

|                    |                          |
|--------------------|--------------------------|
| Free Speed         | 22,000 R.P.M.            |
| Collet Size        | 1/4" or 6 mm             |
| Overall Length     | 240 mm                   |
| Air Inlet          | 1/4"                     |
| Min. Air Hose Size | 10 mm                    |
| Air Consumption    | 3.1 CFM                  |
| Net Weight         | 0.7 kg                   |
| *Packing           | 12PCS/CTN/12kg/13kg/1.1' |



## YU-GR2205

Low Noise 5" Air Extension Die Grinder

|                    |                          |
|--------------------|--------------------------|
| Free Speed         | 22,000 R.P.M.            |
| Collet Size        | 1/4" or 6 mm             |
| Overall Length     | 280 mm                   |
| Air Inlet          | 1/4"                     |
| Min. Air Hose Size | 10 mm                    |
| Air Consumption    | 3.1 CFM                  |
| Net Weight         | 0.8 kg                   |
| *Packing           | 12PCS/CTN/12kg/13kg/1.1' |



## YU-GR2210

Low Noise 90° Air Angle Die Grinder

|                    |                          |
|--------------------|--------------------------|
| Free Speed         | 18,000 R.P.M.            |
| Collet Size        | 1/4" or 6 mm             |
| Overall Length     | 178 mm                   |
| Air Inlet          | 1/4"                     |
| Min. Air Hose Size | 10 mm                    |
| Air Consumption    | 3.1 CFM                  |
| Net Weight         | 0.7 kg                   |
| *Packing           | 12PCS/CTN/11kg/12kg/0.8' |



## YU-GR2115

Low Speed, Low Noise 115° Air Angle Die Grinder

|                    |                              |
|--------------------|------------------------------|
| Free Speed         | 18,000 R.P.M.                |
| Collet Size        | 1/4" or 6 mm                 |
| Overall Length     | 178 mm                       |
| Air Inlet          | 1/4"                         |
| Min. Air Hose Size | 10 mm                        |
| Air Consumption    | 3.1 CFM                      |
| Net Weight         | 0.7 kg                       |
| *Packing           | 12PCS/CTN/10.8kg/11.8kg/0.8' |



## YU-GR2230

Low Noise 2" Air Angle Grinder

|                    |                              |
|--------------------|------------------------------|
| Free Speed         | 15,000 R.P.M.                |
| Grinding Wheel     | 2"                           |
| Overall Length     | 178 mm                       |
| Air Inlet          | 1/4"                         |
| Min. Air Hose Size | 10 mm                        |
| Air Consumption    | 3.1 CFM                      |
| Net Weight         | 0.7 kg                       |
| *Packing           | 12PCS/CTN/11.5kg/12.4kg/1.5' |



## YU-GR2231

Low Noise 2" Air Angle Sander

|                    |                                    |
|--------------------|------------------------------------|
| Free Speed         | 15,000 R.P.M.                      |
| Sanding Pad        | 2" included, also available for 3" |
| Overall Length     | 178 mm                             |
| Air Inlet          | 1/4"                               |
| Min. Air Hose Size | 10 mm                              |
| Air Consumption    | 3.1 CFM                            |
| Net Weight         | 0.7 kg                             |
| *Packing           | 12PCS/CTN/10.3kg/11.3kg/0.8'       |



## YU-GR2245A

Low Speed, Low Noise Air Die Grinder

|                    |                              |
|--------------------|------------------------------|
| Free Speed         | 2,600 R.P.M.                 |
| Collet Size        | 1/4" or 6 mm                 |
| Overall Length     | 200 mm                       |
| Air Inlet          | 1/4"                         |
| Min. Air Hose Size | 10 mm                        |
| Air Consumption    | 3.1 CFM                      |
| Net Weight         | 0.7 kg                       |
| *Packing           | 12PCS/CTN/11.5kg/12.1kg/1.1' |



## YU-GR2265A

Low Noise Air Die Grinder

|                    |                              |
|--------------------|------------------------------|
| Free Speed         | 3,600 R.P.M.                 |
| Collet Size        | 1/4" or 6 mm                 |
| Overall Length     | 200 mm                       |
| Air Inlet          | 1/4"                         |
| Min. Air Hose Size | 10 mm                        |
| Air Consumption    | 3.1 CFM                      |
| Net Weight         | 0.7 kg                       |
| *Packing           | 12PCS/CTN/11.5kg/12.1kg/1.1' |



## YU-SD2226

Angle Sander / Polisher

|                    |                             |
|--------------------|-----------------------------|
| Free Speed         | 1,800 R.P.M.                |
| Spindle Thread     | 5/16" -24UNF                |
| Air Pressure       | 90 PSI                      |
| Overall Length     | 200 mm                      |
| Air Inlet          | 1/4"                        |
| Min. Air Hose Size | 10 mm                       |
| Air Consumption    | 3.4 CFM                     |
| Net Weight         | 1.0 kg                      |
| *Packing           | 12PCS/CTN/13kg/13.5kg/0.96' |

\* Sanding pad , polishing pad , wool wheel are not included , it is available for below selection of purchasing.



Sanding Pad Hook-up(3-Hole) ,  
Velcro type 3" : SD2226-03S



Sanding Pad Hook-up(no-Hole) ,  
Vinyl type 5" : SD2226-05S



Wool Wheel  
3" : SD2226-03W  
5" : SD2226-05W



Coarse Polishing Pad  
3" : SD2226-03P  
5" : SD2226-05P



## 0.5HP Low Noise Family-Looking Air Tools - Drill, Eraser, Tire Buffer & Others



### YU-DR2245KL

Keyless, Low Noise 3/8" Air Drill

|                    |                              |
|--------------------|------------------------------|
| Chuck Size         | 3/8" or 10 mm                |
| Free Speed         | 2,600 R.P.M.                 |
| Spindle Thread     | 3/8" - 24UNF                 |
| Overall Length     | 225 mm                       |
| Air Inlet          | 1/4"                         |
| Min. Air Hose Size | 10 mm                        |
| Air Consumption    | 3.1 CFM                      |
| Net Weight         | 0.8 kg                       |
| *Packing           | 12PCS/CTN/11.5kg/12.1kg/1.1' |



### YU-DR2245

Low Noise 3/8" Air Drill

|                    |                          |
|--------------------|--------------------------|
| Chuck Size         | 3/8" or 10 mm            |
| Free Speed         | 2,600 R.P.M.             |
| Spindle Thread     | 3/8" - 24UNF             |
| Overall Length     | 225 mm                   |
| Air Inlet          | 1/4"                     |
| Min. Air Hose Size | 10 mm                    |
| Air Consumption    | 3.1 CFM                  |
| Net Weight         | 0.8 kg                   |
| *Packing           | 12PCS/CTN/13kg/14kg/1.1' |



### YU-DR2225

Low Noise 3/8" 90° Angle Air Drill

|                    |                              |
|--------------------|------------------------------|
| Chuck Size         | 3/8" or 10 mm                |
| Free Speed         | 1,800 R.P.M.                 |
| Spindle Thread     | 3/8" - 24UNF                 |
| Overall Length     | 195 mm                       |
| Air Inlet          | 1/4"                         |
| Min. Air Hose Size | 10 mm                        |
| Air Consumption    | 3.1 CFM                      |
| Net Weight         | 0.9 kg                       |
| *Packing           | 12PCS/CTN/14.8kg/15.4kg/0.8' |



### YU-DR2265KL

Keyless, Low Noise 3/8" Air Drill

|                    |                              |
|--------------------|------------------------------|
| Chuck Size         | 3/8" or 10 mm                |
| Free Speed         | 2,600 R.P.M.                 |
| Spindle Thread     | 3/8" - 24UNF                 |
| Overall Length     | 225 mm                       |
| Air Inlet          | 1/4"                         |
| Min. Air Hose Size | 10 mm                        |
| Air Consumption    | 3.1 CFM                      |
| Net Weight         | 0.8 kg                       |
| *Packing           | 12PCS/CTN/11.5kg/12.1kg/1.1' |



### YU-DR2265

Low Noise 3/8" Air Drill

|                    |                          |
|--------------------|--------------------------|
| Chuck Size         | 3/8" or 10 mm            |
| Free Speed         | 2,600 R.P.M.             |
| Spindle Thread     | 3/8" - 24UNF             |
| Overall Length     | 225 mm                   |
| Air Inlet          | 1/4"                     |
| Min. Air Hose Size | 10 mm                    |
| Air Consumption    | 3.1 CFM                  |
| Net Weight         | 0.8 kg                   |
| *Packing           | 12PCS/CTN/13kg/14kg/1.1' |



### YU-CT2250

Low Noise Air Cutter

|                    |                          |
|--------------------|--------------------------|
| Free Speed         | 21,000 R.P.M.            |
| Cutting Wheel      | 3"                       |
| Overall Length     | 193 mm                   |
| Air Inlet          | 1/4"                     |
| Min. Air Hose Size | 10 mm                    |
| Air Consumption    | 3.1 CFM                  |
| Net Weight         | 0.8 kg                   |
| *Packing           | 12PCS/CTN/12kg/13kg/1.5' |



### YU-ER2260

Low Noise Air Eraser

|                    |                          |
|--------------------|--------------------------|
| Free Speed         | 2,600 R.P.M.             |
| Spindle Thread     | 5/16" - 24UNF            |
| Overall Length     | 225 mm                   |
| Air Inlet          | 1/4"                     |
| Min. Air Hose Size | 10 mm                    |
| Air Consumption    | 3.1 CFM                  |
| Net Weight         | 0.8 kg                   |
| *Packing           | 12PCS/CTN/12kg/13kg/1.1' |



### YU-ER2603

Low Noise Air Eraser

|                    |                          |
|--------------------|--------------------------|
| Free Speed         | 3,600 R.P.M.             |
| Spindle Thread     | 5/16" - 24UNF            |
| Overall Length     | 225 mm                   |
| Air Inlet          | 1/4"                     |
| Min. Air Hose Size | 10 mm                    |
| Air Consumption    | 3.1 CFM                  |
| Net Weight         | 0.8 kg                   |
| *Packing           | 12PCS/CTN/12kg/13kg/1.1' |



### YU-NB2350

Low Noise Air Nibbler

|                    |                          |
|--------------------|--------------------------|
| Free Speed         | 2,600 R.P.M.             |
| Cutting Capacity   | Steel 1.2mm              |
|                    | Aluminum 1.6mm           |
| Air Inlet          | 1/4"                     |
| Min. Air Hose Size | 10 mm                    |
| Air Consumption    | 3.1 CFM                  |
| Net Weight         | 1.0 kg                   |
| *Packing           | 12PCS/CTN/13kg/14kg/0.8' |



### YU-MS2300

Low Noise Air Metal Shear

|                    |                          |
|--------------------|--------------------------|
| Free Speed         | 2,600 R.P.M.             |
| Cutting Capacity   | Steel 1.2mm              |
|                    | Aluminum 1.6mm           |
| Air Inlet          | 1/4"                     |
| Min. Air Hose Size | 10 mm                    |
| Air Consumption    | 3.1 CFM                  |
| Net Weight         | 1.0 kg                   |
| *Packing           | 12PCS/CTN/15kg/16kg/1.1' |



### YU-MS2310

Low Noise Air Scissors

|                    |                          |
|--------------------|--------------------------|
| Free Speed         | 2,600 R.P.M.             |
| Cutting Capacity   | Steel 1.2mm              |
|                    | Aluminum 1.6mm           |
| Air Inlet          | 1/4"                     |
| Min. Air Hose Size | 10 mm                    |
| Air Consumption    | 3.1 CFM                  |
| Net Weight         | 1.0 kg                   |
| *Packing           | 12PCS/CTN/15kg/16kg/1.1' |



### YU-TB2270

Low Noise Air Tire Buffer

|                    |                              |
|--------------------|------------------------------|
| Free Speed         | 2,600 R.P.M.                 |
| Spindle Thread     | 3/8" - 24UNF                 |
| Overall Length     | 225 mm                       |
| Air Inlet          | 1/4"                         |
| Min. Air Hose Size | 10 mm                        |
| Air Consumption    | 3.1 CFM                      |
| Net Weight         | 0.8 kg                       |
| *Packing           | 12PCS/CTN/11.6kg/12.6kg/1.1' |



# 0.5HP Low Noise Family-Looking Air Tools - Drill, Eraser, Tire Buffer & Others



## YU-DR2245KL

Keyless, Low Noise 3/8" Air Drill

|                    |                              |
|--------------------|------------------------------|
| Chuck Size         | 3/8" or 10 mm                |
| Free Speed         | 2,600 R.P.M.                 |
| Spindle Thread     | 3/8" - 24UNF                 |
| Overall Length     | 225 mm                       |
| Air Inlet          | 1/4"                         |
| Min. Air Hose Size | 10 mm                        |
| Air Consumption    | 3.1 CFM                      |
| Net Weight         | 0.8 kg                       |
| *Packing           | 12PCS/CTN/11.5kg/12.1kg/1.1' |



## YU-DR2245

Low Noise 3/8" Air Drill

|                    |                          |
|--------------------|--------------------------|
| Chuck Size         | 3/8" or 10 mm            |
| Free Speed         | 2,600 R.P.M.             |
| Spindle Thread     | 3/8" - 24UNF             |
| Overall Length     | 225 mm                   |
| Air Inlet          | 1/4"                     |
| Min. Air Hose Size | 10 mm                    |
| Air Consumption    | 3.1 CFM                  |
| Net Weight         | 0.8 kg                   |
| *Packing           | 12PCS/CTN/13kg/14kg/1.1' |



## YU-DR2225

Low Noise 3/8" 90° Angle Air Drill

|                    |                              |
|--------------------|------------------------------|
| Chuck Size         | 3/8" or 10 mm                |
| Free Speed         | 1,800 R.P.M.                 |
| Spindle Thread     | 3/8" - 24UNF                 |
| Overall Length     | 195 mm                       |
| Air Inlet          | 1/4"                         |
| Min. Air Hose Size | 10 mm                        |
| Air Consumption    | 3.1 CFM                      |
| Net Weight         | 0.9 kg                       |
| *Packing           | 12PCS/CTN/14.8kg/15.4kg/0.8' |



## YU-DR2265KL

Keyless, Low Noise 3/8" Air Drill

|                    |                              |
|--------------------|------------------------------|
| Chuck Size         | 3/8" or 10 mm                |
| Free Speed         | 2,600 R.P.M.                 |
| Spindle Thread     | 3/8" - 24UNF                 |
| Overall Length     | 225 mm                       |
| Air Inlet          | 1/4"                         |
| Min. Air Hose Size | 10 mm                        |
| Air Consumption    | 3.1 CFM                      |
| Net Weight         | 0.8 kg                       |
| *Packing           | 12PCS/CTN/11.5kg/12.1kg/1.1' |



## YU-DR2265

Low Noise 3/8" Air Drill

|                    |                          |
|--------------------|--------------------------|
| Chuck Size         | 3/8" or 10 mm            |
| Free Speed         | 2,600 R.P.M.             |
| Spindle Thread     | 3/8" - 24UNF             |
| Overall Length     | 225 mm                   |
| Air Inlet          | 1/4"                     |
| Min. Air Hose Size | 10 mm                    |
| Air Consumption    | 3.1 CFM                  |
| Net Weight         | 0.8 kg                   |
| *Packing           | 12PCS/CTN/13kg/14kg/1.1' |



## YU-CT2250

Low Noise Air Cutter

|                    |                          |
|--------------------|--------------------------|
| Free Speed         | 21,000 R.P.M.            |
| Cutting Wheel      | 3"                       |
| Overall Length     | 193 mm                   |
| Air Inlet          | 1/4"                     |
| Min. Air Hose Size | 10 mm                    |
| Air Consumption    | 3.1 CFM                  |
| Net Weight         | 0.8 kg                   |
| *Packing           | 12PCS/CTN/12kg/13kg/1.5' |



## YU-ER2260

Low Noise Air Eraser

|                    |                          |
|--------------------|--------------------------|
| Free Speed         | 2,600 R.P.M.             |
| Spindle Thread     | 5/16" - 24UNF            |
| Overall Length     | 225 mm                   |
| Air Inlet          | 1/4"                     |
| Min. Air Hose Size | 10 mm                    |
| Air Consumption    | 3.1 CFM                  |
| Net Weight         | 0.8 kg                   |
| *Packing           | 12PCS/CTN/12kg/13kg/1.1' |



## YU-ER2603

Low Noise Air Eraser

|                    |                          |
|--------------------|--------------------------|
| Free Speed         | 3,600 R.P.M.             |
| Spindle Thread     | 5/16" - 24UNF            |
| Overall Length     | 225 mm                   |
| Air Inlet          | 1/4"                     |
| Min. Air Hose Size | 10 mm                    |
| Air Consumption    | 3.1 CFM                  |
| Net Weight         | 0.8 kg                   |
| *Packing           | 12PCS/CTN/12kg/13kg/1.1' |



## YU-NB2350

Low Noise Air Nibbler

|                    |                          |
|--------------------|--------------------------|
| Free Speed         | 2,600 R.P.M.             |
| Cutting Capacity   | Steel 1.2mm              |
|                    | Aluminum 1.6mm           |
| Air Inlet          | 1/4"                     |
| Min. Air Hose Size | 10 mm                    |
| Air Consumption    | 3.1 CFM                  |
| Net Weight         | 1.0 kg                   |
| *Packing           | 12PCS/CTN/13kg/14kg/0.8' |



## YU-MS2300

Low Noise Air Metal Shear

|                    |                          |
|--------------------|--------------------------|
| Free Speed         | 2,600 R.P.M.             |
| Cutting Capacity   | Steel 1.2mm              |
|                    | Aluminum 1.6mm           |
| Air Inlet          | 1/4"                     |
| Min. Air Hose Size | 10 mm                    |
| Air Consumption    | 3.1 CFM                  |
| Net Weight         | 1.0 kg                   |
| *Packing           | 12PCS/CTN/15kg/16kg/1.1' |



## YU-MS2310

Low Noise Air Scissors

|                    |                          |
|--------------------|--------------------------|
| Free Speed         | 2,600 R.P.M.             |
| Cutting Capacity   | Steel 1.2mm              |
|                    | Aluminum 1.6mm           |
| Air Inlet          | 1/4"                     |
| Min. Air Hose Size | 10 mm                    |
| Air Consumption    | 3.1 CFM                  |
| Net Weight         | 1.0 kg                   |
| *Packing           | 12PCS/CTN/15kg/16kg/1.1' |



## YU-TB2270

Low Noise Air Tire Buffer

|                    |                              |
|--------------------|------------------------------|
| Free Speed         | 2,600 R.P.M.                 |
| Spindle Thread     | 3/8" - 24UNF                 |
| Overall Length     | 225 mm                       |
| Air Inlet          | 1/4"                         |
| Min. Air Hose Size | 10 mm                        |
| Air Consumption    | 3.1 CFM                      |
| Net Weight         | 0.8 kg                       |
| *Packing           | 12PCS/CTN/11.6kg/12.6kg/1.1' |



# Air Grinder & Sander & Polisher



## YU-GR406

4" Angle Grinder (Safety lever)

## YU-GR406R

4" Angle Roll Grinder (Grip lever)

|                 |                           |
|-----------------|---------------------------|
| Free Speed      | 11000 R.P.M.              |
| Air Consumption | 6 CFM                     |
| Air Inlet       | 1/4"                      |
| Air Hose        | 10 mm (3/8")              |
| Air Pressure    | 90 PSI                    |
| Net Weight      | 1.82 kg                   |
| *PACKING        | 10PCS/CTN/19kg/20kg/1.45' |



## YU-GR506

5" Angle Grinder (Safety lever)

## YU-GR506R

5" Angle Grinder (Grip lever)

|                 |                           |
|-----------------|---------------------------|
| Free Speed      | 11000 R.P.M.              |
| Air Consumption | 6 CFM                     |
| Air Inlet       | 1/4"                      |
| Air Hose        | 10 mm (3/8")              |
| Air Pressure    | 90 PSI                    |
| Net Weight      | 1.9 kg                    |
| *PACKING        | 10PCS/CTN/20kg/21kg/1.45' |



## YU-GR706

7" Angle Grinder (Safety lever)

|                 |                            |
|-----------------|----------------------------|
| Free Speed      | 7000 R.P.M.                |
| Wheel size      | 7"                         |
| Air Consumption | 9 CFM                      |
| Air Inlet       | 3/8"                       |
| Air Hose        | 12 mm (1/2")               |
| Air Pressure    | 90PSI                      |
| Net Weight      | 3.18 kg                    |
| *PACKING        | 6PCS/CTN/18kg/22.5kg/2.32' |



## YU-VSD701 7" Vertical Sander

## YU-GR701(P) 7" Vertical Polisher

|                 |                                               |
|-----------------|-----------------------------------------------|
| Free Speed      | 4500 R.P.M. (Sander) / 2300 R.P.M. (Polisher) |
| Spindle Thread  | 5/8" - 11                                     |
| Air Consumption | 6 CFM                                         |
| Air Inlet       | 1/4"                                          |
| Air Hose        | 3/8"                                          |
| Air Pressure    | 90 PSI                                        |
| Net Weight      | 2 kg                                          |
| *PACKING        | 8PCS/CTN/21.6kg/22.3kg/1.2'                   |



## YU-GR702

7" Heavy Duty Air Vertical Grinder

|                 |                          |
|-----------------|--------------------------|
| Free Speed      | 7000 R.P.M.              |
| Spindle Thread  | 5/8" - 11                |
| Air Consumption | 0.46 m <sup>3</sup> /min |
| Air Inlet       | 1/2"                     |
| Air Hose        | 13 mm                    |
| Air Pressure    | 90 PSI                   |
| Net Weight      | 4.2 kg                   |
| *PACKING        | 4PCS/CTN/20kg/21kg/2.1'  |



## YU-GR902

9" Heavy Duty Air Vertical Grinder

|                 |                             |
|-----------------|-----------------------------|
| Free Speed      | 6000 R.P.M.                 |
| Spindle Thread  | 5/8" - 11                   |
| Air Consumption | 0.46 m <sup>3</sup> /min    |
| Air Inlet       | 1/2"                        |
| Air Hose        | 13 mm                       |
| Air Pressure    | 90 PSI                      |
| Net Weight      | 4.4 kg                      |
| *PACKING        | 4PCS/CTN/23.5kg/24.5kg/2.9' |



## YU-GR907(S)

7" Angle Sander (Safety lever)

## YU-GR907(P)

7" Angle Polisher (Safety lever)

## YU-GR907(PA)

7" Angle Polisher (Safety lever)

With Wool Polishing Pad

|                     |                                               |
|---------------------|-----------------------------------------------|
| Free Speed          | 4500 R.P.M. (Sander) / 2500 R.P.M. (Polisher) |
| Air Consumption     | 12 CFM                                        |
| Air Inlet           | 1/4"                                          |
| Air Hose            | 10 mm                                         |
| Spindle Thread Size | 5/8"-11THD                                    |
| Pad Size            | 7"                                            |
| Sound Level         | 85 dB(A)                                      |
| Air Pressure        | 90 PSI                                        |
| Overall Length      | 406 mm (16")                                  |
| Net Weight          | 2.9 kg                                        |
| *PACKING            | 6PCS/CTN/15.2kg/16.2kg/1.75'                  |



## YU-GR903

9" Heavy Duty Air Vertical Grinder

|                 |                          |
|-----------------|--------------------------|
| Free Speed      | 5600 R.P.M.              |
| Spindle Thread  | 5/8" - 11                |
| Air Consumption | 0.76 m <sup>3</sup> /min |
| Air Inlet       | 1/2"                     |
| Air Hose        | 13 mm                    |
| Air Pressure    | 90 PSI                   |
| Net Weight      | 4.97 kgs                 |
| *PACKING        | 4PCS/CTN/26kg/28kg/2.9'  |



# Air Grinder & Sander & Polisher €



**YU-SD380**  
Dual Action Sander

|                 |                           |
|-----------------|---------------------------|
| Free Speed      | 15,000 R.P.M.             |
| Overall Length  | 178 mm                    |
| Air Inlet       | 1/4"                      |
| Air Consumption | 0.4 m³/min (14.1 CFM)     |
| Net Weight      | 0.74 kg                   |
| Air Pressure    | 90PSI                     |
| Pad Size        | 2" or 3"                  |
| Orbit Diameter  | 3 mm                      |
| *Packing        | 20PCS/CTN/19kg/20kg/1.24' |



**YU-SD381**  
2"-3" Angle Polisher & Grinder

|                 |                           |
|-----------------|---------------------------|
| Free Speed      | 2,500 R.P.M.              |
| Overall Length  | 110 mm                    |
| Air Inlet       | 1/4"                      |
| Air Consumption | 0.4 m³/min (14.1 CFM)     |
| Net Weight      | 0.81 kg                   |
| Air Pressure    | 90PSI                     |
| Pad Size        | 2" or 3"                  |
| *Packing        | 20PCS/CTN/19kg/20kg/1.24' |



**YU-SD382**  
2"-3" High Speed Sander & Grinder

|                 |                           |
|-----------------|---------------------------|
| Free Speed      | 15,000 R.P.M.             |
| Overall Length  | 190 mm                    |
| Air Inlet       | 1/4"                      |
| Air Consumption | 0.4 m³/min (14.1 CFM)     |
| Net Weight      | 0.65 kg                   |
| Air Pressure    | 90PSI                     |
| *Packing        | 20PCS/CTN/19kg/20kg/1.24' |



**YU-SD383**  
Finger Sander

|                 |                           |
|-----------------|---------------------------|
| Free Speed      | 13,000 R.P.M.             |
| Overall Length  | 200 mm                    |
| Air Inlet       | 1/4"                      |
| Air Consumption | 0.4 m³/min (14.1 CFM)     |
| Net Weight      | 0.82 kg                   |
| Air Pressure    | 90PSI                     |
| Orbit Diameter  | 3 mm                      |
| *Packing        | 20PCS/CTN/19kg/20kg/1.24' |



**YU-SD384**  
Mini Orbital Sander

|                 |                           |
|-----------------|---------------------------|
| Free Speed      | 9,000 R.P.M.              |
| Overall Length  | 150 mm                    |
| Air Inlet       | 1/4"                      |
| Hose Size       | 3/8"                      |
| Air Consumption | 0.26 m³/min (9.2 CFM)     |
| Net Weight      | 0.76 kg                   |
| Air Pressure    | 90PSI                     |
| Pad Size        | 73 x 98 mm                |
| Orbit Diameter  | 3 mm                      |
| *Packing        | 12PCS/CTN/17kg/18kg/1.58' |



**YU-SD385**  
Mini Orbital Sander

|                 |                           |
|-----------------|---------------------------|
| Free Speed      | 9,000 R.P.M.              |
| Overall Length  | 163 mm                    |
| Air Inlet       | 1/4"                      |
| Hose Size       | 3/8"                      |
| Air Consumption | 0.26 m³/min (9.2 CFM)     |
| Net Weight      | 0.7 kg                    |
| Air Pressure    | 90PSI                     |
| Pad Size        | 70 x 100 mm               |
| Orbit Diameter  | 3 mm                      |
| *Packing        | 12PCS/CTN/17kg/18kg/1.58' |



**YU-SD386**  
Mini Orbital Sander

|                 |                           |
|-----------------|---------------------------|
| Free Speed      | 9,000 R.P.M.              |
| Overall Length  | 144 mm                    |
| Air Inlet       | 1/4"                      |
| Hose Size       | 3/8"                      |
| Air Consumption | 0.26 m³/min (9.2 CFM)     |
| Net Weight      | 0.67 kg                   |
| Air Pressure    | 90PSI                     |
| Pad Size        | 110 x 100 mm              |
| Orbit Diameter  | 3 mm                      |
| *Packing        | 12PCS/CTN/17kg/18kg/1.58' |



**YU-SD387**  
Wet Sander

|                 |                           |
|-----------------|---------------------------|
| Free Speed      | 7,000 R.P.M.              |
| Overall Length  | 192 mm                    |
| Air Inlet       | 1/4"                      |
| Hose Size       | 3/8"                      |
| Air Consumption | 0.26 m³/min (9.2 CFM)     |
| Net Weight      | 0.73 kg                   |
| Air Pressure    | 90PSI                     |
| Pad Size        | 73 x 98 mm                |
| Orbit Diameter  | 3 mm                      |
| *Packing        | 12PCS/CTN/17kg/18kg/1.58' |



**YU-SD326D 3" DUST FREE ACTION SANDER**  
**YU-SD326N 3" DUAL ACTION SANDER**

|                 |                                                                              |
|-----------------|------------------------------------------------------------------------------|
| Free Speed      | 12000 R.P.M.                                                                 |
| Air Inlet       | 1/4"                                                                         |
| Hose Size       | 3/8"                                                                         |
| Air Consumption | 0.3 m³/min (10.6 CFM)                                                        |
| Net Weight      | 0.92 kg                                                                      |
| Air Pressure    | 90 PSI                                                                       |
| Pad Size        | 73 mm (3") velcro type                                                       |
| Orbit Diameter  | 2.5 mm                                                                       |
| *PACKING        | Yu-SD326D:10PCS/CTN/19kg/20kg/3.1'<br>Yu-SD326N:10PCS/CTN/17.5kg/18.5kg/2.4' |



# Air Sander


**YU-SD101D** Dust Free Dual Action Sander

**YU-SD101N** Dual Action Sander

|                |                            |
|----------------|----------------------------|
| Free Speed     | 11000 R.P.M                |
| Air Inlet      | 1/4"                       |
| Hose Size      | 3/8" (10mm)                |
| Net Weight     | 0.9 kg                     |
| Air Pressure   | 90 PSI                     |
| Pad Size       | 5" or "6 velcro type       |
| Vibration      | 0.8 m/s2                   |
| Orbit Diameter | 5 mm                       |
| *PACKING       | 6":6PCS/CTN/8.5kg/9.5kg/2' |


**YU-SD303D** Dust Free Dual Action Sander

**YU-SD303N** Dual Action Sander

|                 |                                                                                    |
|-----------------|------------------------------------------------------------------------------------|
| Free Speed      | 10000 R.P.M                                                                        |
| Air Inlet       | 1/4"                                                                               |
| Hose Size       | 3/8"                                                                               |
| Air Consumption | 0.34m <sup>3</sup> /min (12CFM)                                                    |
| Net Weight      | 0.9 kg                                                                             |
| Air Pressure    | 90 PSI                                                                             |
| Pad Size        | 5" or "6 velcro type                                                               |
| Pad VWeight     | 100g(5"), 120g(6")                                                                 |
| Orbit Diameter  | 5 mm                                                                               |
| *PACKING        | YU-SD303D :12PCS/CTN/21.5kg/22.5kg/2.3'<br>YU-SD303N :12PCS/CTN/19.5kg/20.5kg/2.2' |


**YU-SD325D** Dust Free Dual Action Sander


**YU-SD305N** Dual Action Sander

|                 |                                                                                |
|-----------------|--------------------------------------------------------------------------------|
| Free Speed      | 12,000 R.P.M.                                                                  |
| Overall Length  | 233 mm                                                                         |
| Air Inlet       | 1/4"                                                                           |
| Hose Size       | 3/8"                                                                           |
| Air Consumption | 0.3 m <sup>3</sup> /min (10.6CFM)                                              |
| Net Weight      | 0.96kg                                                                         |
| Air Pressure    | 90PSI                                                                          |
| Pad Size        | 5" x mm                                                                        |
| Orbit Diameter  | 5 mm                                                                           |
| *Packing        | YU-SD325D :12PCS/CTN/19kg/20kg/3.1'<br>YU-SD305N :12PCS/CTN/17.5kg/18.5kg/2.4' |


**YU-SD305D** Dust Free Dual Action Sander

**YU-SD305N** Dual Action Sander

|                 |                                                                              |
|-----------------|------------------------------------------------------------------------------|
| Free Speed      | 10000R.P.M.                                                                  |
| Air Inlet       | 1/4"                                                                         |
| Hose Size       | 3/8"                                                                         |
| Air Consumption | 0.3m <sup>3</sup> /min (10.6CFM)                                             |
| Net Weight      | 1kg                                                                          |
| Air Pressure    | 90PSI                                                                        |
| Pad Size        | 5" or 6" Velcro type                                                         |
| Orbit Diameter  | 5mm                                                                          |
| *PACKING        | YU-SD305D:10PCS/CTN/19kg/20kg/3.1'<br>YU-SD305N:10PCS/CTN/17.5kg/18.5kg/2.4' |

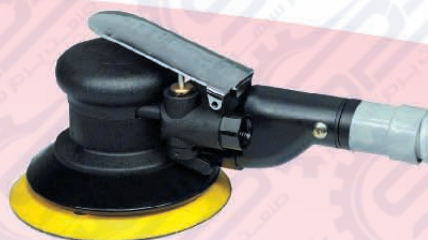
**YU-SD309D** Dust Free Dual Action Sander

**YU-SD309N** Dual Action Sander

|                 |                                                                              |
|-----------------|------------------------------------------------------------------------------|
| Free Speed      | 12000R.P.M.                                                                  |
| Air Inlet       | 1/4"                                                                         |
| Hose Size       | 3/8"                                                                         |
| Air Consumption | 0.3m <sup>3</sup> /min (10.6CFM)                                             |
| Net Weight      | 0.78kg                                                                       |
| Air Pressure    | 90PSI                                                                        |
| Pad Size        | 5" or 6" Velcro type                                                         |
| Pad Weight      | 100g(5"), 120g(6")                                                           |
| Orbit Diameter  | 5mm                                                                          |
| *PACKING        | YU-SD309D:10PCS/CTN/19kg/20kg/3.1'<br>YU-SD309N:10PCS/CTN/17.5kg/18.5kg/2.4' |


**YU-SD203D**  
Dust Free Dual Action Sander

|                 |                                  |
|-----------------|----------------------------------|
| Free Speed      | 10000R.P.M.                      |
| Overall Length  | 284mm                            |
| Air Inlet       | 1/4"                             |
| Hose Size       | 3/8"                             |
| Air Consumption | 0.4m <sup>3</sup> /min (14.1CFM) |
| Net Weight      | 1.9kg                            |
| Air Pressure    | 90PSI                            |
| Pad Size        | 5" or 6" Velcro type             |
| Pad Weight      | 100g(5"), 120g (6")              |
| Orbit Diameter  | 10mm                             |
| Packing         | 6PCS/CTN/17kg/18kg/2'            |


**YU-SD204D** DUST FREE ORBITAL SANDER

**YU-SD204N** ORBITAL SANDER

|                 |                                  |
|-----------------|----------------------------------|
| Free Speed      | 8000R.P.M.                       |
| Overall Length  | 294mm                            |
| Air Inlet       | 1/4"                             |
| Hose Size       | 3/8"                             |
| Air Consumption | 0.4m <sup>3</sup> /min (14.1CFM) |
| Net Weight      | 2.1kg                            |
| Air Pressure    | 90PSI                            |
| Pad Size        | 93*176mm, Velcro or clipper type |
| Orbit Diameter  | 5mm                              |
| *PACKING        | 6PCS/CTN/17kg/18kg/2'            |


**YU-SD205D** Dust Free Orbital Sander

**YU-SD205N** Orbital Sander

|                 |                                   |
|-----------------|-----------------------------------|
| Free Speed      | 7000R.P.M.                        |
| Overall Length  | 300mm                             |
| Air Inlet       | 1/4"                              |
| Hose Size       | 3/8"                              |
| Air Consumption | 0.4m <sup>3</sup> /min (14.1CFM)  |
| Net Weight      | 2.2kg                             |
| Air Pressure    | 90PSI                             |
| Pad Size        | 112*220mm, Velcro or clipper type |
| Orbit Diameter  | 5mm                               |
| *PACKING        | 6PCS/CTN/17kg/18kg/2'             |


**YU-BS001** Air Belt Sander (10 X 330mm)

**YU-BS002** Air Belt Sander (20 X 520mm)

|                 | YU-BS001                          | YU-BS002                          |
|-----------------|-----------------------------------|-----------------------------------|
| Free Speed      | 16000 R.P.M.                      | 16000 R.P.M.                      |
| Size of Belt    | 10 X 330 mm                       | 20 X 520 mm                       |
| Air Consumption | 4 CFM                             | 4 CFM                             |
| Air Inlet       | 1/4"                              | 1/4"                              |
| Air Pressure    | 90 PSI                            | 90 PSI                            |
| Overall length  | 290 mm                            | 360 mm                            |
| Net Weight      | 0.8 kgs                           | 1.2 kgs                           |
| *PACKING        | 20 pcs/CTN/<br>18 kgs/19 kgs/1.4' | 10 pcs/CTN/<br>14 kgs/15 kgs/1.4' |



# Air Cutting Tools



**YU-BW001**  
Air Body Saw

|                       |                        |
|-----------------------|------------------------|
| Blows per minute      | 8000-10000 S.P.M.      |
| Strokes Length        | 10 mm                  |
| Capacity Cutting Size | Steel: 1.6 mm          |
| Air Inlet             | 1/4"                   |
| Air Pressure          | 90 PSI                 |
| Air Consumption       | 2 CFM                  |
| Overall Length        | 230mm                  |
| Net Weight            | 0.65 kgs               |
| *PACKING              | 20PCS/CTN/13kg/14kg/1' |

Included:

Metal Saw Blade: 24T, 32T each pc.

2mm Hex Wrench, 4 mm Hex Wrench each pc.



**YU-BW002**  
Low Vibration Air Body Saw

|                  |                            |
|------------------|----------------------------|
| Blows per minute | 9500 S.P.M.                |
| Strokes Length   | 10 mm                      |
| Air Inlet        | 1/4"                       |
| Air Pressure     | 90 PSI                     |
| Air Consumption  | 3 CFM                      |
| Overall Length   | 260 mm                     |
| Air Hose         | 3/8"                       |
| Vibration        | 3.7 m/s <sup>2</sup>       |
| Net Weight       | 0.51kgs                    |
| *PACKING         | 20PCS/CTN/16kg/16.6kg/1.4' |

Included:

Metal Saw Blade: 18T, 24T, 32T each pc.

3mm Hex Wrench: 1 pc.

Patented Universal Swivel Air Inlet Joint: 1 pc.



**YU-BW003**  
Low Vibration Air Body Saw

|                  |                          |
|------------------|--------------------------|
| Blows per minute | 12000 S.P.M.             |
| Strokes Length   | 10 mm                    |
| Max Vibration:   | 3 m/s <sup>2</sup>       |
| Air Inlet        | 1/4"                     |
| Air Pressure     | 90 PSI                   |
| Air Consumption  | 1.7 CFM                  |
| Overall Length   | 147mm                    |
| Net Weight       | 0.4 kgs                  |
| *PACKING         | 25PCS/CTN/14kg/15kg/1.2' |



- Low Vibration
- Light Weight
- Low Noise

**YU-BW004**  
Low Vibration Air Body Saw

|                  |                          |
|------------------|--------------------------|
| Blows per minute | 10000 S.P.M.             |
| Strokes Length   | 10 mm                    |
| Max Vibration:   | 3 m/s <sup>2</sup>       |
| Air Inlet        | 1/4"                     |
| Air Pressure     | 90 PSI                   |
| Overall Length   | 215 mm                   |
| Net Weight       | 0.55 kgs                 |
| *PACKING         | 20PCS/CTN/13kg/14kg/1.1' |



**YU-BW005**  
Air Body Saw & File

|                                |                                   |
|--------------------------------|-----------------------------------|
| Handle Diameter                | 29 x 29 mm                        |
| Avg. Air Cons.                 | 0.2 M <sup>3</sup> /min (7.1 CFM) |
| Air Pressure                   | 90 PSI                            |
| Stroke                         | 5 mm                              |
| Stroke Speed                   | 3500 S.P.M.                       |
| Cutting Capacity ( Iron Plate) | 1 mm Iron: 500 mm/min             |
| Saw Blade:                     | 32 teeth/inch                     |
| File                           | 9.2 X 2.6mm, 5.1mm, 6.2mm         |
| Overall Length                 | 160 mm                            |
| Net Weight                     | 0.38 kg                           |
| *PACKING                       | 20PCS/CTN/15kg/16kg/2'            |



**YU-TLE03**  
Air File

|                  |                              |
|------------------|------------------------------|
| Frequency Stroke | 60000 S.P.M.                 |
| Linear Stoke     | 0.3mm                        |
| Weight           | 200g                         |
| Length           | 185mm                        |
| Hose Size        | 9.5mm                        |
| *Packing         | 25PCS/CTN/11.3kg/12.3kg/1.9' |



**YU-MS001**  
Air Metal Shear

|                  |                               |
|------------------|-------------------------------|
| Free Speed       | 2500 R.P.M.                   |
| Cutting Capacity | Steel: 1.2 mm Aluminum: 1.6mm |
| Air Inlet        | 1/4"                          |
| Air Pressure     | 90 PSI                        |
| Air Consumption  | 4.5 CFM                       |
| Overall Length   | 230 mm                        |
| Net Weight       | 1.1 kgs                       |
| *PACKING         | 20 PCS/CTN/22kg/23kg/1'       |



**YU-MS002**  
Air Metal Shear

|                  |                                |
|------------------|--------------------------------|
| Free Speed       | 2200 R.P.M.                    |
| Cutting Capacity | Steel: 1.2 mm Aluminum: 1.6 mm |
| Air Inlet        | 1/4"                           |
| Air Pressure     | 90 PSI                         |
| Air Consumption  | 4.5 CFM                        |
| Overall Length   | 190 mm                         |
| Net Weight       | 1.1 kgs                        |
| *PACKING         | 10 PCS/CTN/11.8kg/12.8kg/0.8'  |



# Air Needle Scaler / Flux Chipper

## YU-NS003

### Air Needle Scaler Straight Type


|                   |                            |
|-------------------|----------------------------|
| Air Inlet         | 1/4"                       |
| Blows per min.    | 4600 B.P.M.                |
| Piston Stroke     | 30 mm                      |
| Needle Diameter   | 3 x 120 mm                 |
| Number of Needles | 12                         |
| Air Pressure      | 90 PSI                     |
| Air Consumption   | 16 CFM                     |
| Overall Length    | 310 mm                     |
| Net Weight        | 1.19 kgs                   |
| *PACKING          | 10 PC/CTN/14kg/14.5kg/0.7' |



## YU-NS001

### Air Needle Scaler Pistol Type

|                   |                              |
|-------------------|------------------------------|
| Air Inlet         | 1/4"                         |
| Blows per min.    | 4500 B.P.M.                  |
| Piston Stroke     | 36 mm                        |
| Needle Diameter   | 3 x 180 mm                   |
| Number of Needles | 19                           |
| Air Pressure      | 90 PSI                       |
| Air Consumption   | 4 CFM                        |
| Overall Length    | 370 mm                       |
| Net Weight        | 2.1kgs                       |
| *PACKING          | 6 PC/CTN/12.6 kg/13 kg/0.62' |

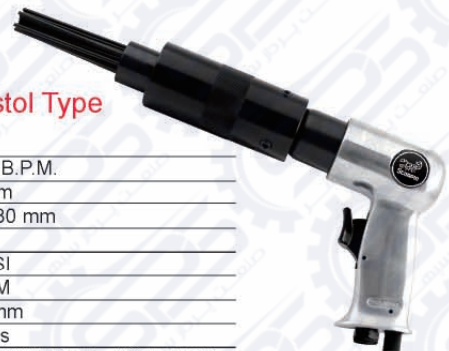

## YU-NS004

### Air Needle Scaler Straight Type

|                   |                            |
|-------------------|----------------------------|
| Air Inlet         | 1/4"                       |
| Blows per min.    | 3200 B.P.M.                |
| Piston Stroke     | 32 mm                      |
| Needle Diameter   | 3 x 180 mm                 |
| Number of Needles | 19                         |
| Air Pressure      | 90 PSI                     |
| Air Consumption   | 3.4 CFM                    |
| Overall Length    | 380 mm                     |
| Net Weight        | 2.6 kgs                    |
| *PACKING          | 6 PC/CTN/14kg/14.5kg/0.55' |



## YU-NS002

### Air Needle Scaler Pistol type

|                   |                             |
|-------------------|-----------------------------|
| Air Inlet         | 1/4"                        |
| Blows per Min.    | 3200 B.P.M.                 |
| Piston Stroke     | 28 mm                       |
| Needle Diameter   | 3 x 180 mm                  |
| Number of Needles | 19                          |
| Air Pressure      | 90 PSI                      |
| Air Consumption   | 10 CFM                      |
| Overall Length    | 380 mm                      |
| Net Weight        | 2.6 kgs                     |
| *PACKING          | 5 PC/CTN/14.5kg/15.5kg/0.8' |



## YU-NS005

### Air Needle Scaler Straight Type

|                   |                              |
|-------------------|------------------------------|
| Air Inlet         | 1/4"                         |
| Blows per min.    | 4200 B.P.M.                  |
| Piston Stroke     | 32 mm                        |
| Needle Diameter   | 3 x 180mm                    |
| Number of Needles | 19                           |
| Air Pressure      | 90 PSI                       |
| Air Consumption   | 3.4 CFM                      |
| Overall Length    | 470 mm                       |
| Net Weight        | 2.6 kgs                      |
| *PACKING          | 6 PC/CTN/16.9kg/18.2kg/0.62' |



## YU-NS006

### Air Needle Scaler Pistol Type

|                   |                         |
|-------------------|-------------------------|
| Air Inlet         | 1/4"                    |
| Blows per min.    | 4000 B.P.M.             |
| Piston Stroke     | 27                      |
| Needle Diameter   | 3 x 180 mm              |
| Number of Needles | 23                      |
| Air Pressure      | 90 PSI                  |
| Air Consumption   | 7 CFM                   |
| Overall Length    | 335 mm                  |
| Weight            | 2.8 kgs                 |
| *PACKING          | 6 PC/CTN/17kg/19kg/1.3' |



## YU-FC001

### Air Needle Scaler Straight Type

|                 |                            |
|-----------------|----------------------------|
| Air Inlet       | 1/4"                       |
| Blows per min.  | 3800 B.P.M.                |
| Piston Stroke   | 30 mm                      |
| Air Pressure    | 90 PSI                     |
| Air Consumption | 3.4 CFM                    |
| Overall Length  | 300 mm                     |
| Net Weight      | 2.6 kgs                    |
| *PACKING        | 10 PC/CTN/14kg/14.5kg/0.7' |



## YU-NS007

### Air Needle Scaler Pistol Type

|                   |                         |
|-------------------|-------------------------|
| Air Inlet         | 1/4"                    |
| Blows per min.    | 3500 B.P.M.             |
| Piston Stroke     | 28                      |
| Needle Diameter   | 3 x 180 mm              |
| Number of Needles | 28                      |
| Air Pressure      | 90 PSI                  |
| Air Consumption   | 7.4 CFM                 |
| Overall Length    | 350 mm                  |
| Net Weight        | 3.6kgs                  |
| *PACKING          | 6 PC/CTN/22kg/24kg/1.3' |



## YU-FC002

### Air Needle Scaler Straight Type

|                 |                          |
|-----------------|--------------------------|
| Air Inlet       | 1/4"                     |
| Blows per min.  | 4200 B.P.M.              |
| Piston Stroke   | 32 mm                    |
| Air Pressure    | 90 PSI                   |
| Air Consumption | 8.8 CFM                  |
| Overall Length  | 380 mm                   |
| Net Weight      | 2.5 kgs                  |
| *PACKING        | 6 PC/CTN/12kg/13kg/0.55' |



## YU-FC003

### Air Needle Scaler Pistol type

|                 |                           |
|-----------------|---------------------------|
| Air Inlet       | 1/4"                      |
| Blows per min.  | 3200 B.P.M.               |
| Piston Stroke   | 28 mm                     |
| Air Pressure    | 90 PSI                    |
| Air Consumption | 10 CFM                    |
| Overall Length  | 270 mm                    |
| Net Weight      | 2.6 kgs                   |
| *PACKING        | 5 PC/CTN/14.5kg/15kg/0.8' |





# Air Hammer

## YU-AH319


Composite Vibration-Damped  
190mm Air Hammer



|                 |                          |
|-----------------|--------------------------|
| Air Inlet       | 1/4"                     |
| Air Consumption | 7.8 CFM                  |
| Blows per min   | 3000 B.P.M               |
| Overall Length  | 215mm                    |
| Pistol Stroke   | 70 mm                    |
| Vibration       | 4.2 m/sec <sup>2</sup>   |
| Net Weight      | 1.6 kgs                  |
| *PACKING:       | 10PCS/CTN/17kg/19kg/1.6' |

## YU-AH325

Composite Vibration-Damped  
250mm Air Hammer

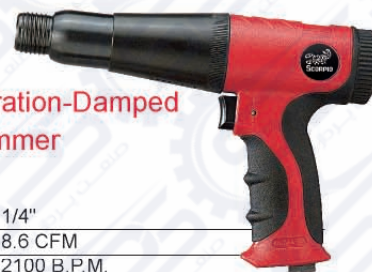

|                 |                          |
|-----------------|--------------------------|
| Air Inlet       | 1/4"                     |
| Air Consumption | 8.6 CFM                  |
| Blows per min   | 2100 B.P.M.              |
| Overall Length  | 260mm                    |
| Pistol Stroke   | 95mm                     |
| Vibration       | 2.8m/sec <sup>2</sup>    |
| Net Weight      | 1.9 kgs                  |
| *PACKING:       | 10PCS/CTN/21kg/23kg/1.6' |

## YU-AH820

Vibration-Damped 210mm  
Air Hammer



|                 |                         |
|-----------------|-------------------------|
| Air Inlet       | 1/4"                    |
| Air Consumption | 8.2 CFM                 |
| Blows per min   | 2500 B.P.M              |
| Overall Length  | 245mm                   |
| Pistol Stroke   | 75 mm                   |
| Vibration       | 3.5 m/sec <sup>2</sup>  |
| Net Weight      | 2.3 kgs                 |
| *PACKING:       | 6PCS/CTN/14kg/16kg/0.9' |

## YU-AH850

Vibration-Damped 250mm  
Air Hammer



|                 |                       |
|-----------------|-----------------------|
| Air Inlet       | 1/4"                  |
| Air Consumption | 9 CFM                 |
| Blows per min   | 2100 B.P.M.           |
| Overall Length  | 280mm                 |
| Pistol Stroke   | 90mm                  |
| Vibration       | 5.8m/sec <sup>2</sup> |
| Net Weight      | 2.6 kg                |
| *PACKING:       | 6PCS/CTN/16kg/18kg/1' |

## YU-AH319K

Composite Vibration-Damped  
190mm Air Hammer Kit



|            |                                    |
|------------|------------------------------------|
| Contents:  |                                    |
| 1 PC       | YU-AH319 Air Hammer                |
| 1 PC       | Quick Change Retainer              |
| 5 PC       | 175MM Chisel W/ Round or Hex Shank |
| 1 PC       | Spring                             |
| 1 PC       | 1/4" Air Nipple                    |
| 1 PC       | Blow Case                          |
| Net Weight | 3.6 kgs                            |
| *PACKING:  | 5PCS/CTN/14kg/16kg/1.7'            |

## YU-AH325K

Composite Vibration-Damped  
250mm Air Hammer Kit



|            |                                    |
|------------|------------------------------------|
| Contents:  |                                    |
| 1 PC       | YU-AH325 Air Hammer                |
| 1 PC       | Quick Change Retainer              |
| 5 PC       | 175MM Chisel w/ Round or Hex Shank |
| 1 PC       | Spring                             |
| 1 PC       | 1/4" Air Nipple                    |
| 1 PC       | Blow Case                          |
| Net Weight | 3.9 kgs                            |
| *PACKING:  | 5PCS/CTN/16kg/18kg/1.7'            |

## YU-AH190K

Heavy Duty 190mm  
Air Hammer Kit



|               |                                   |
|---------------|-----------------------------------|
| Air Inlet     | 1/4"                              |
| Pistol Stroke | 64 mm                             |
| Blows per min | 3200 B.P.M                        |
| Contents:     |                                   |
| 1 PC          | YU-AH190 Air Hammer               |
| 1 PC          | Retainer Spring                   |
| 5 PC          | 7" Chisel With Round or Hex Shank |
| 1 PC          | Oil Pot                           |
| 1 PC          | Nipple                            |
| 1 PC          | Blow Case                         |
| Net Weight    | 2.6 kgs                           |
| *PACKING:     | 10 PCS/CTN/26 kg /27kg/1.8'       |



## YU-AH150K

Heavy Duty 150mm Air Hammer Kit

|                |                                    |
|----------------|------------------------------------|
| Air Inlet      | 1/4"                               |
| Pistol Stroke  | 41mm                               |
| Blows per min  | 4500 B.P.M.                        |
| Overall Length | 135mm                              |
| Contents:      |                                    |
| 1 PC           | YU-AH150 Air Hammer                |
| 1 PC           | Retainer Spring                    |
| 4 PC           | 125MM Chisel w/ Round or Hex Shank |
| Net Weight     | 0.76 kgs                           |
| *PACKING:      | 10 pcs/CTN/ 9.5kg/10.5kg/0.5'      |



# Air Chipping Hammer

## YU-P11-R / H

### Mini Chipping Hammer



|                  |                          |
|------------------|--------------------------|
| Air Inlet        | 1/4"                     |
| Air Consumption  | 7.4 CFM                  |
| Blows Per Minute | 3000B.P.M.               |
| Overall Length   | 270mm                    |
| Pistol Stroke    | 56mm                     |
| Net Weight       | 1.6 kgs                  |
| *PACKING         | 10PCS/CTN/20kg/22kg/1.2' |

## YU-P11K-R / H

### Mini Chipping Hammer Kit

|            |                              |
|------------|------------------------------|
| 1 PC       | YU-P11 Mini Chipping Hammer  |
| 1 PC       | Quick Changer Retainer R-205 |
| 1 PC       | 1/4" Air Nipple              |
| 1 PC       | Moil Point Chisel            |
| 1 PC       | 20 mm Flat Chisel            |
| 1 PC       | 30 mm Flat Chisel            |
| 1 PC       | Retainer Spring              |
| 1 PC       | Retainer Spring Beehive Type |
| 1 PC       | Blow Case                    |
| Net Weight | 4.6 kgs                      |
| *PACKING   | 4Sets/CTN/15ks/17kg/2'       |



## YU-P12-R / H

### 1" Chipping Hammer

|                 |                             |
|-----------------|-----------------------------|
| Air Inlet       | 3/8"                        |
| Air Consumption | 9.6 CFM                     |
| Blows Per Min   | 2500 B.P.M.                 |
| Overall Length  | 395 mm                      |
| Pistol Stroke   | 60 mm                       |
| Net Weight      | 7 kgs                       |
| *PACKING        | 2PCS/CTN/14.5kg/15.5kg/0.8' |



## YU-P13-R / H

### 2" Chipping Hammer

|                 |                         |
|-----------------|-------------------------|
| Air Inlet       | 3/8"                    |
| Air Consumption | 10.4 CFM                |
| Blows Per Min   | 2300B.P.M.              |
| Overall Length  | 405 mm                  |
| Pistol Stroke   | 74 mm                   |
| Net Weight      | 7.3 kgs                 |
| *PACKING        | 2PCS/CTN/15kg/16kg/0.8' |



## YU-P14-R5 / H

### 3" Chipping Hammer

|                 |                           |
|-----------------|---------------------------|
| Air Inlet       | 3/8"                      |
| Air Consumption | 12.3 CFM                  |
| Blows Per Min   | 2000 B.P.M.               |
| Overall Length  | 450 mm                    |
| Pistol Stroke   | 115 mm                    |
| Net Weight      | 8 kgs                     |
| *PACKING        | 2PCS/CTN/16kg/17.5kg/0.9' |



## YU-P15-R / H

### 4" Chipping Hammer

|                 |                         |
|-----------------|-------------------------|
| Air Inlet       | 3/8"                    |
| Air Consumption | 13CFM                   |
| Blows Per Min   | 1600 B.P.M.             |
| Overall Length  | 470mm                   |
| Pistol Stroke   | 140mm                   |
| Net Weight      | 8.3 kgs                 |
| *PACKING        | 2PCS/CTN/16kg/18kg/0.9' |

### Retainer Available :



#### R205-P11

Quick Change retainer for YU-P11



#### R1-P11

Quick Change retainer for YU-P11



#### R2-P11

Quick Change retainer for YU-P11



#### R-3400

Quick Change retainer for YU-P12~P14

■ YU-P12 ~P15 Chisel opening shank -Round (0.68") /Hex (0.58")

■ YU-P11 Chisel Opening Shank -Round (12.7mm)/Hex (12mm)



# Air Concrete Breaker


Powerful hitting power and low reacting force.

It is suitable for destroy the concretes, asphalt path, building and infrastructure.


## YU-CB10S

### 1/2" Air Concrete Breaker

|                  |                            |
|------------------|----------------------------|
| Piston Dia.      | 35 mm                      |
| Piston Stroke    | 150 mm                     |
| Blows Per Minute | 1300 B.P.M.                |
| Overall Length   | 753 mm                     |
| Air Hose         | 1/2"                       |
| Shank Size       | 26 mm                      |
| Air Consumption  | 35 CFM                     |
| Net Weight       | 14.1 kgs                   |
| *PACKING         | 1Sets/CTN/14ks/15.6kg/0.7' |

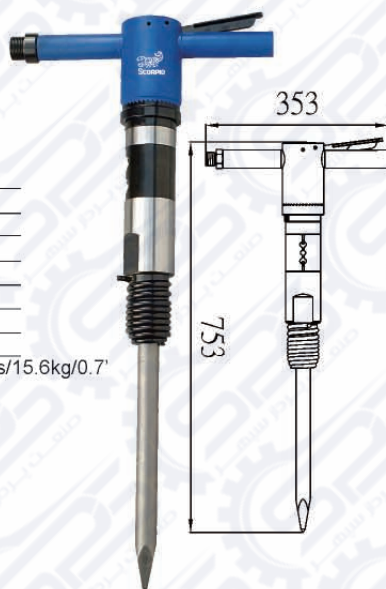


## Clutch Type Handle

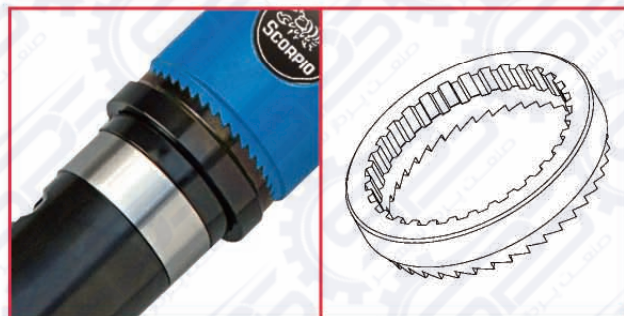

## YU-CB30S

### 3/4" Air Concrete Breaker

|                  |                              |
|------------------|------------------------------|
| Piston Dia.      | 40 mm                        |
| Piston Stroke    | 235 mm                       |
| Blows Per Minute | 1000 B.P.M.                  |
| Overall Length   | 880 mm                       |
| Air Hose         | 3/4"                         |
| Shank Size       | 30 mm                        |
| Air Consumption  | 42 CFM                       |
| Net Weight       | 24.6 kgs                     |
| *PACKING         | 1Sets/CTN/24.6kg/26.5kg/0.9' |

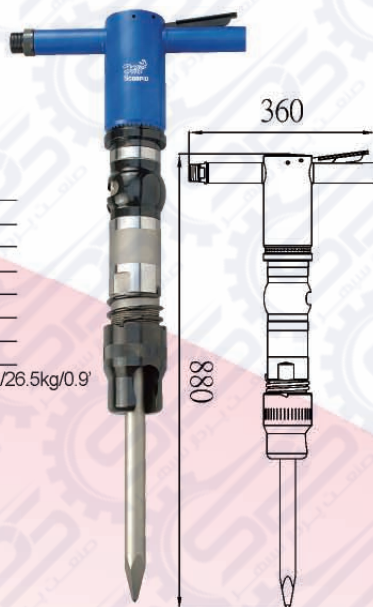

## Accessories



Unique nut for  
YU-CB10S & YU-CB30S



HN-10S 1/2" Hose Nipple  
HN-30S 3/4" Hose Nipple




R-30S Hitch Cutter  
Retainer for YU-CB30S




R-10S Beehive Retainer  
Springs for YU-CB10S

# Concrete Breaker Chisel Sets

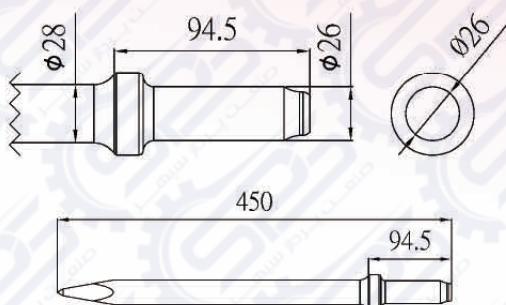

YU-CB10S

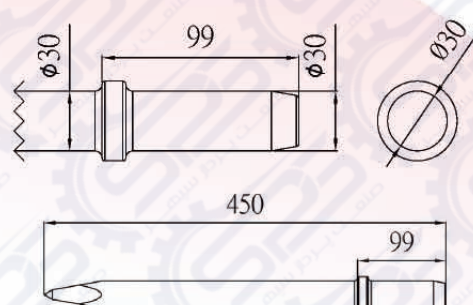

YU-CB30S



# Air Hydraulic Riveters

## YU-RV101

### 3/16" Air Hydraulic Riveter

|                |                                              |
|----------------|----------------------------------------------|
| Rivet Capacity | For setting blind rivets up to 3/16" (4.8mm) |
| Traction Power | 2680 lbs (1219 kg)                           |
| Tools Stroke   | 14 mm                                        |
| Air Pressure   | 90 PSI                                       |
| Nosepieces     | 2.4mm, 3.2mm, 4.0mm, 4.8mm                   |
| Net Weight     | 1.5kg                                        |
| *PACKING       | 10PCS/CTN/18kg/19kg/1.85'                    |



## YU-RV101K

### 3/16" Air Hydraulic Riveter Kit

#### Contents:

|                       |                        |                       |
|-----------------------|------------------------|-----------------------|
| 1pc 3/16" Air riveter | 1pc Jaw Case, Front    | 1pc Nut, Frame Cap    |
| 10pcs Rivets 3/16"    | 1pc Jaw                | 1pc O Ring(P12)       |
| 10pcs Rivets 5/32"    | 1pc Jaw Pusher         | 1pc Spring, Valve     |
| 10pcs Rivets 1/8"     | 1pc Jaw Case, Rear     | 1pc Collar, Valve     |
| 10pcs Rivets 3/32"    | 1pc Spring, Jaw Pusher | 1pc O Ring(AS568-147) |
| 1pc Oiler             | 4pcs O Ring(P12)       | 1pc Piston Ring       |
| 1pc Joint nut         | 2pcs Backup Ring(P12)  | 1pc O Ring(P6)        |
| 1pc Swivel joint      | 1pc O Ring(P22A)       | 1pc Spring, Valve     |
| 1pc Nosepiece, 3/16"  | 1pc Backup Ring(P22A)  | 1pc O Ring(P7)        |
| 1pc Nosepiece, 5/32"  | 1pc Spring             | 1pc Spanner Gauge     |
| 1pc Nosepiece, 1/8"   | 1pc O Ring(S28)        | 1pc Spanner           |
| 1pc Nosepiece, 3/32"  | 1pc Safety Cap         |                       |

\*PACKING: 6SETS/CTN/16kgs/17kgs/1.8'



## YU-RV103

### 1/4" Heavy-duty Air Hydraulic Riveter

|                  |                                            |
|------------------|--------------------------------------------|
| Rivet Capacity   | For setting blind rivets up to 1/4"(6.4mm) |
| Traction Power   | 4166 lbs (1894kg)                          |
| Tools Stroke     | 16mm                                       |
| Nosepieces       | 2.4mm, 3.2mm, 4.0mm, 4.8mm, 5.6mm, 6.4mm   |
| Rivet material   | Aluminum, Steel, Stainless steel           |
| Working Pressure | 80-100 PSI (depend on rivet material)      |
| Net Weight       | 2kg                                        |
| *PACKING         | 6PCS/CTN/16kg/17kg/2'                      |



## YU-RV201

### 3/16" Air Hydraulic Riveter

|                  |                                             |
|------------------|---------------------------------------------|
| Rivet Capacity   | For setting blind rivets up to 3/16"(4.8mm) |
| Traction Power   | 2508 lbs (1140 kg)                          |
| Tools Stroke     | 16mm                                        |
| Nosepieces       | 3.2mm, 4.0mm, 4.8mm                         |
| Rivet material   | Aluminum, Steel, Stainless steel            |
| Working Pressure | 60-100 PSI (depend on rivet material)       |
| Net Weight       | 1.45kg                                      |
| *PACKING         | 10PCS/CTN/19kg/20kg/1.9'                    |



## YU-RV104

### 1/4" Heavy Duty Vacuum Air Riveter

|                |                            |
|----------------|----------------------------|
| Rivet Capacity | 5/32"~1/4" (4.0mm-6.4mm)   |
| Traction power | 3130 lbs(1420 kgs)         |
| Tools Stroke   | 18 mm                      |
| Air Pressure   | 90PSI                      |
| Nosepieces     | 4.0mm, 4.8mm, 6.4mm        |
| Net Weight     | 2 kgs                      |
| *PACKING       | 8pcs/CTN/19kgs/20kgs/2.28' |



## YU-RV203

### 3/16" Heavy Duty Vacuum Air Riveter


|                |                                 |
|----------------|---------------------------------|
| Rivet Capacity | 1/8"~3/16" (3.2mm-4.8mm)        |
| Traction power | 1960 lbs (890 kgs)              |
| Tools Stroke   | 15.5 mm                         |
| Air Pressure   | 90 PSI                          |
| Nosepieces     | 3.2 mm, 4.0 mm, 4.8 mm          |
| Net weight     | 1.7 kg                          |
| *PACKING       | 10pcs/CTN/20.3kgs/21.3kgs/2.58' |



## YU-RV202V

### 3/16" Heavy Duty Vacuum Air Riveter

|                |                            |
|----------------|----------------------------|
| Rivet Capacity | 3/32"~3/16" (2.4mm~4.8mm)  |
| Traction power | 2000 lbs (900 kgs)         |
| Tools Stroke   | 21 mm                      |
| Air Pressure   | 90 PSI                     |
| Nosepieces     | 2.4mm, 3.2mm, 4.0mm, 4.8mm |
| Net weight     | 1.5 kgs                    |
| *PACKING       | 10 PCS/CTN/ 19 kg/20kg/2'  |

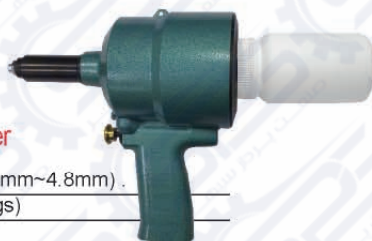

## YU-RV202

### 3/16" Heavy Duty Air Only Riveter

|                |                            |
|----------------|----------------------------|
| Rivet Capacity | 3/32"~3/16" (2.4mm~4.8mm)  |
| Traction power | 2000 lbs (900 kgs)         |
| Tools Stroke   | 21 mm                      |
| Air Pressure   | 90 PSI                     |
| Nosepieces     | 2.4mm, 3.2mm, 4.0mm, 4.8mm |
| Net weight     | 1.5 kgs                    |
| *PACKING       | 10 PCS/CTN/ 19 kg/20kg/2'  |



- Made of Alum, Alloy, Strong and Light Weight
- Powered By Air Only, Don't need to Refill Oil
- Easy to Maintain, Efficient to Operate
- Quick Operation 28-30 Cycles Per Minute

- Made of Alum, Alloy, Strong and Light Weight
- Powered By Air Only, Don't need to Refill Oil
- Easy to Maintain, Efficient to Operate
- Quick Operation 28-30 Cycles Per Minute



# Air Hydraulic Riveters

## YU-RV204

### 3/16" Heavy Duty Vacuum Air Riveter

|                |                                           |
|----------------|-------------------------------------------|
| Rivet Capacity | 3/32"~3/16" (2.4mm-4.8mm) in all material |
| Traction power | 2400 lbs (1090 kgs)                       |
| Tools Stroke   | 19.5 mm                                   |
| Air Pressure   | 90PSI                                     |
| Nosepieces     | 2.4mm, 3.2mm, 4.0mm, 4.8mm                |
| Net weight     | 1.87 kgs                                  |
| *PACKING       | 10pcs/CTN/20.3kgs/21.3kgs/2.58'           |



## YU-RV105

### 1/4" Heavy Duty Vacuum Air Riveter

|                |                                          |
|----------------|------------------------------------------|
| Rivet Capacity | 3/16"~1/4" (4.8mm-6.4mm) in all material |
| Traction power | 3800 lbs(1723 kgs)                       |
| Tools Stroke   | 25mm                                     |
| Air Pressure   | 90PSI                                    |
| Nosepieces     | 4.8mm, 5.6mm, 6.4mm                      |
| Net weight     | 1.9 kgs                                  |
| *PACKING       | 8pcs/CTN/19kgs/20kgs/2.28'               |



## YU-RV205

### 3/16" Heavy Duty Vacuum Air Riveter

|                |                                           |
|----------------|-------------------------------------------|
| Rivet Capacity | 3/32"~3/16" (2.4mm-4.8mm) in all material |
| Traction power | 2000 lbs (908 kgs)                        |
| Tools Stroke   | 23.5 mm                                   |
| Air Pressure   | 95PSI                                     |
| Nosepieces     | 2.4mm, 3.2mm, 4.0mm, 4.8mm                |
| Net Weight     | 1.55 kgs                                  |
| *PACKING       | Blow case                                 |



## YU-RV106

### 1/4" Heavy Duty Vacuum Air Riveter

|                |                                           |
|----------------|-------------------------------------------|
| Rivet Capacity | 3/16"~5/16" (4.8mm-7.8mm) in all material |
| Traction power | 3800 lbs(1723 kgs)                        |
| Tools Stroke   | 22.5 mm                                   |
| Air Pressure   | 95PSI                                     |
| Nosepieces     | 4.8mm, 5.6mm, 6.4mm, 7.8mm                |
| Net Weight     | 1.8 kgs                                   |
| *PACKING       | Blow case                                 |



## YU-RV206

### 3/16" Heavy Duty Vacuum Air Riveter

|                |                                           |
|----------------|-------------------------------------------|
| Rivet Capacity | 3/32"~3/16" (2.4mm-4.8mm) in all material |
| Traction power | 2000 lbs (908 kgs)                        |
| Tools Stroke   | 15 mm                                     |
| Air Pressure   | 95PSI                                     |
| Nosepieces     | 2.4mm, 3.2mm, 4.0mm, 4.8mm                |
| Net Weight     | 1.48 kgs                                  |
| *PACKING       | Blow case                                 |



## YU-RV107

### 1/4" Heavy Duty Vacuum Air Riveter

|                |                                         |
|----------------|-----------------------------------------|
| Rivet Capacity | 1/8" ~1/4" (3.2mm~6.4mm)                |
| Traction power | 2447 lbs (1112 kgs)                     |
| Tools Stroke   | 21mm                                    |
| Air Pressure   | 90 PSI                                  |
| Nosepieces     | 3.2mm, 4.0mm, 4.8mm, 6.4mm              |
| Net weight     | 1.65 kgs                                |
| *PACKING       | Blow case<br>2PCS/CTN/8.1kg/8.6kg/1.75' |



## YU-RV207

### 3/16" Heavy Duty Vacuum Air Riveter

|                |                                         |
|----------------|-----------------------------------------|
| Rivet Capacity | 3/32"~3/16" (2.4mm~4.8mm) .             |
| Traction power | 1805 lbs (820 kgs)                      |
| Tools Stroke   | 18 mm                                   |
| Air Pressure   | 90 PSI                                  |
| Nosepieces     | 2.4mm, 3.2mm, 4.0mm, 4.8mm              |
| Net weight     | 1.5 kgs                                 |
| *PACKING       | Blow case<br>2PCS/CTN/7.7kg/8.3kg/1.75' |



## YU-RV108

### 1/4" Heavy Duty Vacuum Air Riveter

|                |                                         |
|----------------|-----------------------------------------|
| Rivet Capacity | 5/32"~1/4" (4.0mm~6.4mm)                |
| Traction power | 3410lbs (1550 kgs)                      |
| Tools Stroke   | 26mm                                    |
| Air Pressure   | 90 PSI                                  |
| Nosepieces     | 4.0mm, 4.8mm, 6.0mm, 6.4mm              |
| Net weight     | 1.75 kgs                                |
| *PACKING       | Blow case<br>2PCS/CTN/8.6kg/9.7kg/1.75' |





# Air Grease Gun

## Heavy-Duty, Continuous Cycle Dual Piston Air Operated Grease Gun

Dispenses one tube of 14 oz. (397g) Grease in less than a minute!

### YU-OG500 AIR OIL GREASE GUN

|                                |                                                           |
|--------------------------------|-----------------------------------------------------------|
| Grease Output Pressure         | 6000 psi/413 bar (Preset)                                 |
| Grease Reservoir Capacity      | 14 oz. (400cc/397g) Cartridge<br>16 oz. (500cc/454g) Bulk |
| Pneumatic Inlet Pressure (Min) | 40psi                                                     |
| Pneumatic Inlet Pressure (Max) | 90psi                                                     |
| Operating Temperature Range    | -18 ~ 50 C                                                |
| Lubricant (Grease)             | Up to NLGI 2#                                             |
| Weight (empty)                 | 3.2kgs                                                    |
| Weight (full)                  | 3.7kgs                                                    |
| Pneumatic Port Outlet          | 3/8-32UNEF                                                |
| Air Consumption                | 3.5CFM                                                    |
| Air Inlet                      | 1/4"                                                      |
| Dimensions of Grease Gun       | 50X27X75cm                                                |
| *PACKING                       | 5 pc /CTN / 18.6kg/19.6kg/2.5'                            |



### YU-OS707

Universal Power Coupling - Greaser (Capacity 400 c.c.)



\*PACKING : 12PCS/CTN/19.10kg/23.15kg/2'

#### Contents:

1. Greaser Body W/ Aluminum Tube
2. Air Vent Valve & Filler Plug
3. 18" High Pressure Nylon Hose
4. Holder
5. Size 1/4" Driver

#### Features:

It's an all- purpose adapter to electric and pneumatic tools like power drills, wrenches and screw drivers. The adjustable holder is used to fasten the tool and the tube. It's easy to set up and apply on machinery, automobiles, home appliances, agriculture equipments, light industry, etc.

#### Specification:

1. Working Pressure comes from electric or air power tools
2. It fits in pneumatic and electric power tools (Recommended 12V-18V) such as drills, wrenches and screw driver.
3. Fully automatic, cycles continuous grease flow with trigger depressed of power tools
4. The recommended working pressure is 4000 psi
5. High pressure performance deliver up to 8000 psi
6. 3-way loading: 14 oz. cartridge/ Bulk/Dispenser.

### YU-OG500CS

Air Grease Gun Continuous Flow ( Capacity 400 c.c.)



|          |                                    |
|----------|------------------------------------|
| Weight   | 1.55 kgs                           |
| *PACKING | 10 PCS/CTN/15.5 kgs/18.3 kgs /1.8' |

#### Specification:

1. Continuously pumps grease while trigger is depressed.
2. Pressure Range: Air supplied input 60 ~ 150 psi / output 2,400 ~ 6,000 psi
3. Working Pressure: Recommend air supplied input 90 psi / output 3,600 psi
4. Loading Way: 14 oz. Cartridge / 400c.c. Bulk / Dispenser.
5. Capacity: 14 oz. / 400c.c.
6. Standard Accessory: Metallic Bend Spout. "

### YU-OG508CS

360 ° Angle-Free Rotating & Continuous Flow ( Capacity 400 c.c.)



|          |                                  |
|----------|----------------------------------|
| Weight   | 1.63 kgs                         |
| *PACKING | 10 PCS/CTN/16.3kgs/18.6 kgs/1.9' |

#### Specification:

1. Special "Grip handle" designs for allowing it to do Angle-Free Rotating.
2. Continuously pumps grease while trigger is depressed.
3. Pressure Range: Air supplied input 60 ~ 150 psi / output 2,400 ~ 6,000 psi
4. Working Pressure: Recommend air supplied input 90 psi / output 3,600 psi
5. Loading Way: 14 oz. Cartridge / 400c.c. Bulk / Dispenser.
6. Capacity: 14 oz. / 400c.c.
7. Standard Accessory: Metallic Bend Spout.



A. AIR VENT VALVE  
B. FILLER PLUG  
(OPTIONAL)



## Air Accessories - Spring Balancer

- Cost-efficient, practical and compact.
- Fast and convenient installation.
- A ball-shape damper can stop tool at a fixed height in its recover stork.



| Model     | Capacity (Kg) | Weight ( kg) | Travel (m) | Rope option (mm) | Rope Dia (mm) |
|-----------|---------------|--------------|------------|------------------|---------------|
| YU-SB600  | 0.3-0.8       | 0.49         | 1.4        | Nylon/Cable      | 2.5           |
| YU-SB1200 | 0.6-1.5       | 0.52         | 1.4        | Nylon/Cable      | 2.5           |
| YU-SB2000 | 1.0-2.0       | 0.53         | 1.4        | Nylon/Cable      | 2.5           |
| YU-SB3000 | 1.5-3.0       | 0.76         | 1.4        | Cable            | 3.2           |
| YU-SB5000 | 3.0-5.0       | 0.81         | 1.4        | Cable            | 3.2           |



| Model       | Capacity (Kg) | Weight ( kg) | Travel (m) | Rope option (mm) | Rope Dia (mm) |
|-------------|---------------|--------------|------------|------------------|---------------|
| YU-SB-1.5K  | 0.5-1.5       | 0.73         | 1.3        | Cable            | 2             |
| YU-SB-3K    | 1.5-3.0       | 1.73         | 1.3        | Cable            | 3.2           |
| YU-SB-5K    | 3.0-5.0       | 1.82         | 1.3        | Cable            | 3.2           |
| YU-SB-7K(S) | 5.0-7.0       | 1.85         | 1.3        | Cable            | 3.2           |
| YU-SB-9K    | 5.0-9.0       | 3.59         | 1.3        | Cable            | 4             |
| YU-SB-15K   | 9.0-15.0      | 3.61         | 1.3        | Cable            | 4             |
| YU-SB-22K   | 15.0-22.0     | 7.7          | 1.5        | Cable            | 4.8           |
| YU-SB-30K   | 22.0-30.0     | 8.3          | 1.5        | Cable            | 4.8           |

## Air Accessories - F.R.L Combination



REGULATOR (YR)



FILTER (YF)



LUBRICATOR (YL)



F+R (YFR)



FR+L (YFRL)



F+R+L (YC)

| Port Size (PT. NPT.) | 1/4"      |                                                                                                                                          | 3/8"      |                                                                                                                                          | 1/2"      |                                                                                                                                          |
|----------------------|-----------|------------------------------------------------------------------------------------------------------------------------------------------|-----------|------------------------------------------------------------------------------------------------------------------------------------------|-----------|------------------------------------------------------------------------------------------------------------------------------------------|
| Type                 | Model No. | Specification                                                                                                                            | Model No. | Specification                                                                                                                            | Model No. | Specification                                                                                                                            |
| F (Filter)           | YF-802    | Max. Service Pressure: 15kg/cm <sup>2</sup><br>Filter Grade: 5μ<br>Drain Capacity: 80ml                                                  | YF-803    | Max. Service Pressure: 15kg/cm <sup>2</sup><br>Filter Grade: 5μ<br>Drain Capacity: 80ml                                                  | YF-804    | Max. Service Pressure: 15kg/cm <sup>2</sup><br>Filter Grade: 5μ<br>Drain Capacity: 80ml                                                  |
| R (Regulator)        | YR-802    | Max. Service Pressure: 15kg/cm <sup>2</sup><br>Max. Flow: 1750 L/min                                                                     | YR-803    | Max. Service Pressure: 15kg/cm <sup>2</sup><br>Max. Flow: 2500 L/min                                                                     | YR-804    | Max. Service Pressure: 15kg/cm <sup>2</sup><br>Max. Flow: 3000 L/min                                                                     |
| L (Lubricator)       | YL-802    | Max. Service Pressure: 15kg/cm <sup>2</sup><br>Max. Flow: 1750 L/min<br>Oil Capacity: 125ml                                              | YL-803    | Max. Service Pressure: 15kg/cm <sup>2</sup><br>Max. Flow: 2500 L/min<br>Oil Capacity: 125ml                                              | YL-804    | Max. Service Pressure: 15kg/cm <sup>2</sup><br>Max. Flow: 3000 L/min<br>Oil Capacity: 125ml                                              |
| Combined (F+R)       | YFR-802   | Max. Service Pressure: 15kg/cm <sup>2</sup><br>Filter Grade: 5μ<br>Max. Flow: 1750 L/min<br>Drain Capacity: 80ml                         | YFR-803   | Max. Service Pressure: 15kg/cm <sup>2</sup><br>Filter Grade: 5μ<br>Max. Flow: 2500 L/min<br>Drain Capacity: 80ml                         | YFR-804   | Max. Service Pressure: 15kg/cm <sup>2</sup><br>Filter Grade: 5μ<br>Max. Flow: 3000 L/min<br>Drain Capacity: 80ml                         |
| Combined (FR+L)      | YFRL-802  | Max. Service Pressure: 15kg/cm <sup>2</sup><br>Filter Grade: 5μ<br>Max. Flow: 1750 L/min<br>Drain Capacity: 80ml<br>Oil Capacity: 125 ml | YFRL-803  | Max. Service Pressure: 15kg/cm <sup>2</sup><br>Filter Grade: 5μ<br>Max. Flow: 2500 L/min<br>Drain Capacity: 80ml<br>Oil Capacity: 125 ml | YFRL-804  | Max. Service Pressure: 15kg/cm <sup>2</sup><br>Filter Grade: 5μ<br>Max. Flow: 3000 L/min<br>Drain Capacity: 80ml<br>Oil Capacity: 125 ml |
| Combined (F+R+L)     | YC-802    | Max. Service Pressure: 15kg/cm <sup>2</sup><br>Filter Grade: 5μ<br>Max. Flow: 1750 L/min<br>Drain Capacity: 80ml<br>Oil Capacity: 125 ml | YC-803    | Max. Service Pressure: 15kg/cm <sup>2</sup><br>Filter Grade: 5μ<br>Max. Flow: 2500 L/min<br>Drain Capacity: 80ml<br>Oil Capacity: 125 ml | YC-804    | Max. Service Pressure: 15kg/cm <sup>2</sup><br>Filter Grade: 5μ<br>Max. Flow: 3000 L/min<br>Drain Capacity: 80ml<br>Oil Capacity: 125 ml |



## Air Accessories

### Air Inflator



#### YU-AF001

Plastic Air Inflator

\*Packing:

1 Set/Sliding Card

12 Sets/CTN/5kgs/6.8kgs/1.54'



#### YU-AF002

3 Function Tire Gauge

\*Packing:

1 Set/sliding Card

12 Sets/CTN/8.3 kgs/10 Kgs/2.4'



#### YU-AF003

Digital Tire Inflator

\*Packing:

1 Set/sliding Card

12 Sets/CTN/7.6 kgs/9 Kgs/1.5'

#### YU-S50

Impact wrench is not included

Silencing hose Size: 55 x 500mm

\*Packing: 50 PCS/CTN/8.3 kgs/10 Kgs/2.4'



#### YU-R072

1/4" Preset In-Line Regulator

\*Packing: 1 PC/ Box, 200 PCS/CTN



#### F-10A

1/4" Water Separator

\*Packing:

1 PC/Sliding Card



#### YU-B3

1/4" Inline Mini Oiler

\*Packing:

1 PC/Sliding Card



#### YU-H1

Magnetic holder for Impact wrench

\*Packing:

1 PC/Color Box

6 PC/CTN/6.5kgs/7.5kgs/1.85'



## Air Accessories - Sanding Pad

We Provided:

Sanding pad size: 2", 3", 4", 5", 6"

Material: Vinyl & Velcro available

Thread: 5/16"x24T, 5/8" x 11T, M14



Velcro

Vinyl



# Impact Sockets



## S-1208DK

8Pcs 1/2" Dr. Deep  
Impact Socket Set  
13,14,16,17,19,21,22,24 mm  
\*Packing:10set/21/22kg/0.3'



## S-1210DK

10Pcs 1/2" Dr. Deep  
Impact Socket Set  
10,11,13,14,16,17,19,21,22,24 mm  
\*Packing:10set/26/27kg/0.4'



## S-1203DK

3Pcs 1/2" Dr. Thin Wall  
Impact Socket Set  
17,19,21 mm  
\*Packing:20set/16/17kg/0.5'



## S-1207D

7Pcs 1/2" Dr. Thin Wall  
Impact Socket Set  
17,19,21 mm, 13/16", 7/8", 1", 1-1/16"  
\*Packing:10set/21/22kg/0.5'

### 3/8" Impact Sockets

| Model  | Size-mm | Model   | Size-in | Length-mm |
|--------|---------|---------|---------|-----------|
| S-0908 | 8       | S-0908A | 5/16"   | 32        |
| S-0909 | 9       | S-0909A | 11/32"  | 32        |
| S-0910 | 10      | S-0910A | 3/8"    | 32        |
| S-0911 | 11      | S-0911A | 7/16"   | 32        |
| S-0912 | 12      | S-0912A | 15/32"  | 32        |
| S-0913 | 13      | S-0913A | 1/2"    | 32        |
| S-0914 | 14      | S-0914A | 9/16"   | 32        |
| S-0915 | 15      | S-0915A | 19/32"  | 32        |
| S-0916 | 16      | S-0916A | 5/8"    | 32        |
| S-0917 | 17      | S-0917A | 11/16"  | 32        |
| S-0918 | 18      | S-0918A | 23/32"  | 32        |
| S-0919 | 19      | S-0919A | 3/4"    | 32        |
| S-0920 | 20      | S-0920A | 25/32"  | 32        |
| S-0921 | 21      | S-0921A | 13/16"  | 32        |

### 1" Impact Sockets

| Model  | Size-mm | Model   | Size-in  | Length-mm |
|--------|---------|---------|----------|-----------|
| S-2521 | 21      | S-2521A | 13/16"   | 58        |
| S-2522 | 22      | S-2522A | 7/8"     | 58        |
| S-2523 | 23      |         |          | 58        |
| S-2524 | 24      | S-2524A | 15/16"   | 58        |
| S-2525 | 25      | S-2525A | 1"       | 58        |
| S-2526 | 26      |         |          | 58        |
| S-2527 | 27      | S-2527A | 1-1/16"  | 58        |
| S-2528 | 28      |         |          | 58        |
| S-2529 | 29      | S-2529A | 1-1/8"   | 60        |
| S-2530 | 30      | S-2530A | 1-3/16"  | 60        |
| S-2532 | 32      | S-2532A | 1-1/4"   | 61        |
| S-2533 | 33      | S-2533A | 1-5/16"  | 61        |
| S-2534 | 34      |         |          | 61        |
| S-2535 | 35      | S-2535A | 1-3/8"   | 61        |
| S-2536 | 36      | S-2536A | 1-7/16"  | 65        |
| S-2538 | 38      | S-2538A | 1-1/2"   | 65        |
| S-2540 | 40      | S-2540A | 1-9/16"  | 65        |
| S-2541 | 41      | S-2541A | 1-5/8"   | 68        |
| S-2542 | 42      |         |          | 68        |
| S-2543 | 43      | S-2543A | 1-11/16" | 68        |
|        |         | S-2545A | 1-3/4"   | 70        |
| S-2546 | 46      | S-2546A | 1-13/16" | 74        |
| S-2548 | 48      | S-2548A | 1-7/8"   | 74        |
| S-2550 | 50      | S-2550A | 1-15/16" | 74        |

### 1/2" Impact Sockets


| Model  | Size-mm | Model   | Size-in | Length-mm |
|--------|---------|---------|---------|-----------|
| S-1208 | 8       | S-1208A | 5/16"   | 38        |
| S-1209 | 9       |         |         | 38        |
| S-1210 | 10      | S-1210A | 3/8"    | 38        |
| S-1211 | 11      | S-1211A | 7/16"   | 38        |
| S-1212 | 12      |         |         | 38        |
| S-1213 | 13      | S-1213A | 1/2"    | 38        |
| S-1214 | 14      | S-1214A | 9/16"   | 38        |
| S-1215 | 15      | S-1215A | 19/32"  | 38        |
| S-1216 | 16      | S-1216A | 5/8"    | 38        |
| S-1217 | 17      | S-1217A | 11/16"  | 38        |
| S-1218 | 18      |         |         | 38        |
| S-1219 | 19      | S-1219A | 3/4"    | 38        |
| S-1220 | 20      | S-1220A | 25/32"  | 38        |
| S-1221 | 21      | S-1221A | 13/16"  | 38        |
| S-1222 | 22      | S-1222A | 7/8"    | 38        |
| S-1223 | 23      |         |         | 38        |
| S-1224 | 24      | S-1224A | 15/16"  | 38        |
| S-1225 | 25      | S-1225A | 1"      | 38        |
| S-1226 | 26      |         |         | 38        |
| S-1227 | 27      | S-1227A | 1-1/16" | 40        |

### 3/4" Impact Sockets

| Model  | Size-mm | Model   | Size-in  | Length-mm |
|--------|---------|---------|----------|-----------|
| S-1919 | 19      | S-1919A | 3/4"     | 50        |
| S-1921 | 21      | S-1921A | 13/16"   | 50        |
| S-1922 | 22      | S-1922A | 7/8"     | 50        |
| S-1923 | 23      |         |          | 50        |
| S-1924 | 24      | S-1924A | 15/16"   | 50        |
| S-1925 | 25      | S-1925A | 1"       | 53        |
| S-1926 | 26      |         |          | 53        |
| S-1927 | 27      | S-1927A | 1-1/16"  | 53        |
| S-1928 | 28      |         |          | 53        |
| S-1929 | 29      | S-1929A | 1-1/8"   | 53        |
| S-1930 | 30      | S-1930A | 1-3/16"  | 53        |
| S-1932 | 32      | S-1932A | 1-1/4"   | 57        |
| S-1933 | 33      | S-1933A | 1-5/16"  | 57        |
| S-1934 | 34      | S-1934A | 1-3/8"   | 57        |
| S-1935 | 35      |         |          | 57        |
| S-1936 | 36      | S-1936A | 1-7/16"  | 57        |
| S-1938 | 38      | S-1938A | 1-1/2"   | 57        |
| S-1941 | 41      | S-1941A | 1-5/8"   | 58        |
| S-1946 | 46      | S-1946A | 1-13/16" | 62        |
| S-1950 | 50      | S-1950A | 2"       | 65        |



# Tone Control Torques Wrench

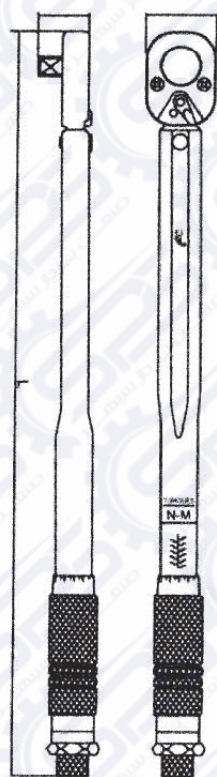

YU-T60 YU-T80 YU-T150 YU-T250 YU-T300 YU-T500 YU-T700

| ITEM NO. | DRIVER     | CAPACITY |         | L(mm) |  | PACKING   |
|----------|------------|----------|---------|-------|---------------------------------------------------------------------------------------|-----------|
| YU-T60   | 1/4"or3/8" | 5-25     | Nm      | 280   | 0.56                                                                                  | 20Pcs/Ctn |
| YU-T80   | 3/8"       | 19-110   | Nm      | 366   | 0.84                                                                                  | 20Pcs/Ctn |
| YU-T150  | 1/2"       | 42-210   | Nm      | 470   | 1.34                                                                                  | 12Pcs/Ctn |
| YU-T250  | 1/2"       | 70-350   | Nm      | 633   | 2.38                                                                                  | 10Pcs/Ctn |
| YU-T300  | 3/4"       | 80-400   | Nm      | 850   | 3.68                                                                                  | 4 Pcs/Ctn |
| YU-T500  | 3/4"       | 100-700  | Nm      | 1063  | 5.70                                                                                  | 4 Pcs/Ctn |
| YU-T700  | 3/4"or1"   | 140-980  | Nm      | 1213  | 6.00                                                                                  | 2 Pcs/Ctn |
| ITEM NO. | DRIVER     | CAPACITY |         | L(mm) |  | PACKING   |
| YU-T60F  | 1/4"or3/8" | 10-200   | Inch.Lb | 280   | 0.56                                                                                  | 20Pcs/Ctn |
| YU-T80F  | 3/8"       | 5-80     | Ft.Lb   | 366   | 0.84                                                                                  | 20Pcs/Ctn |
| YU-T150F | 1/2"       | 10-150   | Ft.Lb   | 470   | 1.34                                                                                  | 12Pcs/Ctn |
| YU-T250F | 1/2"       | 50-250   | Ft.Lb   | 633   | 2.38                                                                                  | 10Pcs/Ctn |
| YU-T300F | 3/4"       | 50-300   | Ft.Lb   | 850   | 3.68                                                                                  | 4 Pcs/Ctn |
| YU-T500F | 3/4"       | 100-500  | Ft.Lb   | 1063  | 5.70                                                                                  | 4 Pcs/Ctn |
| YU-T600F | 3/4"       | 100-600  | Ft.Lb   | 1063  | 5.70                                                                                  | 4 Pcs/Ctn |
| YU-T700F | 3/4"or1"   | 100-700  | Ft.Lb   | 1213  | 6.00                                                                                  | 2 Pcs/Ctn |



# Torque Tester

## Hydraulic Torque Tester

### ECONOMIC AND SIMPLE TOOL TORQUE MEASUREMENT

The simple designed hydraulic torque testers are to be applied to impact wrenches and similar impact action fastening tools in monitoring torque output of new and repaired tools in comparison with a master tool. The readout in the dial indicator does not show absolute torque value, but just comparative degree of power of the tool on test.

#### Application:

| MODEL   | Square Driver           | KG-M  | FT-LB  |
|---------|-------------------------|-------|--------|
| YU-SK06 | 3/8"                    | 0-17  | 0-120  |
| YU-SK09 | 3/8"                    | 0-32  | 0-230  |
| PACKING | 1PCS/CTN/13kg/15.8kg/1' |       |        |
| YU-SK12 | 1/2"                    | 0-69  | 0-500  |
| YU-SK19 | 3/4"                    | 0-138 | 0-1000 |
| YU-SK25 | 1"                      | 0-414 | 0-3000 |
| PACKING | 1PCS/CTN/32kg/38.5kg/2' |       |        |



### Operating Instructions:

For getting exact test value in a fixed time, please set the standard torque wrench (B) to desired torque. Then put the square drive head of torque wrench into the sleeve of torque meter (A). Increase pressure gradually and turn the bolt of torque meter to push the hand to torque dial (C) moving. When the torque wrench turns to desired torque, the value indicated on the torque dial is the exact one you want.

## Impact Torque Tester

- It is suitable for detection all kinds of impact wrenches.
- It is available for the quality examination and the new product research development, specially is the best helper for the Production Department.
- It is convenient and accurate to use electronic or dial wrench against the tested value.
- RS232-C is included for the output of reading to PC for drawing or a printer.
- The certification report of transducer and management software are attached.
- The basic guarantee is 3 years for the instrument ( included indicator and transducer ).



### Specifications:

- Transducer is from 500 to 5000 N.m to be supplied.
- Transducer accuracy is better than  $\pm 0.3\%$ .
- Indicator functions:
  1. two display windows of the panel for torque with Limit Set or with Blows per Minute ( B. P. M. ) and all show at the same time.
  2. Clockwise or Anti-clockwise testing is available.
  3. Also with a selective auto reset function.
  4. Available calibrated in various torque units as well as an automatic conversion function are included. ( N.m, lbf.ft, lbf.in, kgf.m, kgf.cm ).
  5. The indicator works with different range of transducer, may also test the other type of power tools, such as: Oil Pulse-Shut off type, Oil Pulse-Non shut off type, Clutch type and torque wrench,--- and so on.
  6. Power Source : AC 110V ~ 240V.




#### Application:

| MODEL   | Square Driver    | N.m      | Ft-lb    | In-lb    | Kg-m     | Kg-m       |
|---------|------------------|----------|----------|----------|----------|------------|
| DT-500  | 1/4" , 3/8"      | 25-500   | 18.5-369 | 221-446  | 2.5-51   | 250-5100   |
| DT-1000 | 3/8" , 1/2"      | 100-1000 | 74-738   | 885-8851 | 10.2-102 | 1020-10200 |
| DT-2500 | 1/2" , 3/4"      | 250-2500 | 185-1845 |          | 25.5-255 |            |
| DT-5000 | 3/4" , 1" 1-1/2" | 500-5000 | 369-3690 |          | 51-510   |            |



# Air Compressor Hook-up

## Typical Air Compressor or Tank Hook-Up

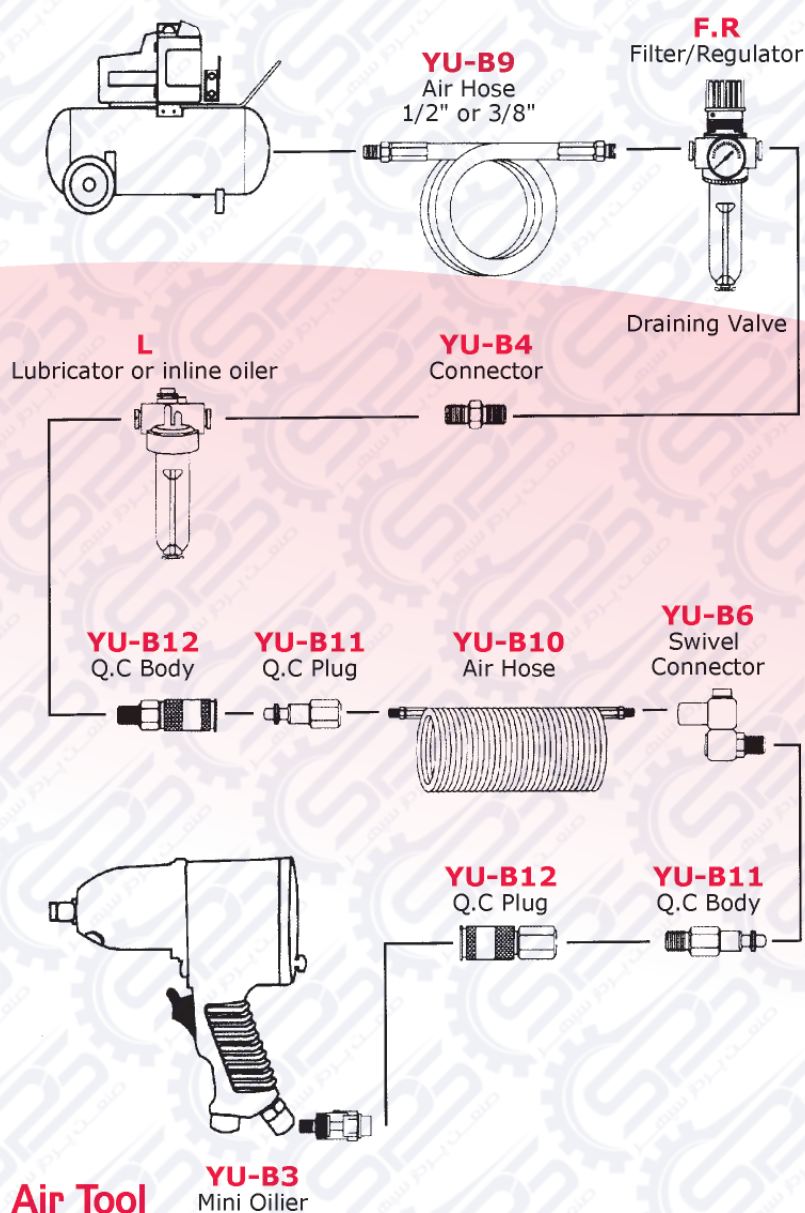

**Air Tool**

**YU-B3**  
Mini Oilier

### WARNING!!

While installing air compressor system, be sure to have filters separators for oil and water, regulators, and lubricators to increase work efficiency, prolong the life of air tools and reduce maintenance costs.

### ■ FILTERS, REGULATORS, LUBRICATORS



**YU-B1**

#### FILTERS/REGULATOR

Regulates air pressure and removes moisture, oil and other debris from the air line. Protects tools from rust and is essential while spray painting. Locate as close to the tool as possible.



**YU-B2**

#### LUBRICATOR OR INLINE OILIER

Administers oil into the air line.

Reduces excessive wear and rusting in tools.

Do not use while spray painting.

### ■ PLUMBING COMPONENTS

#### CONNECTORS



**YU-B4**

Connects components that have similar NPT threads; Male or Female.

#### ADAPTERS



**YU-B5**

Combines components that have different NPT threads; Male or Female.



**YU-B6**

#### 360° SWIVEL CONNECTOR

Eliminates hose twist and improves tool handling.



**YU-B7**

#### T-FITTING

Ideal for branching air lines.



**YU-B8**

#### IN-LINE VALVE

Ideal for branching air lines.

### ■ HOSE



**YU-B9**

#### 1/2" of 3/8" I.D. HOSE

Ideal for increasing working distance in high CFM applications.



**YU-B10**

#### AIR HOSE

Self-retracting and lightweight. Less bulk than regular hoses. Ideal secondary hose line in lower CFM applications.

### ■ QUICK-CONNECTS



**YU-B11**




**YU-B12**

#### BODIES & PLUGS

Provide quick and easy attachment/separation of components within the air line. Do not mix different styles of bodies/plugs.



# Periodic Maintenance and Inspection

| Items     | Description                                                                                                                                                           | Inspection                                                                               | Daily | Weekly | Remarks       |
|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------|-------|--------|---------------|
| <b>1</b>  | Check the condition of air line accessories, and drain out the water from the separators and air line to keep the air supply system of air line clean and dry.        |         | ●     |        | All Air Tools |
| <b>2</b>  | Always keep the air pressure at 90 psi (6.3kg/cm <sup>2</sup> ) for maximum tool performance and take your reading while the tool is running.                         | 90 PSI  | ●     |        | All Air Tools |
| <b>3</b>  | Use proper couplers, nipples, hoses, pipes and fittings.                                                                                                              |        | ●     |        | All Air Tools |
| <b>4</b>  | Check that quick change couplers are in secure connection and in good order.                                                                                          |        | ●     | ●      | All Air Tools |
| <b>5</b>  | Keep tools properly lubricated to prevent wear and rust.                                                                                                              |       | ●     | ●      | All Air Tools |
| <b>6</b>  | When tools are not in use, clean and lubricate them, then store them in a clean and dry place.                                                                        |      | ●     | ●      | All Air Tools |
| <b>7</b>  | Always use safety goggles or a face shield when operating air tools. Never wear loose clothing that might get caught in the tool and cause injuries.                  |      | ●     |        | All Air Tools |
| <b>8</b>  | While installing whip hoses or quick coupler directly into the tool, use a liquid pipe sealant to prevent damage to the housing from damage. (Do not use teflon tape) |      | ●     |        | All Air Tools |
| <b>9</b>  | Always make sure that the impact wrench socket is properly retained to prevent injuries. Use an impact-type socket only.                                              |      | ●     |        | Air Wrench    |
| <b>10</b> | If an air wrench fails to loosen a bolt in five (5) seconds, use a larger wrench and apply penetrating oil before using the wrench.                                   |      |       |        | Air Wrench    |
| <b>11</b> | Clean and lubricate check jaws periodically to prolong concentricity.                                                                                                 |      | ●     |        | Air Drill     |
| <b>12</b> | To avoid the danger of breakage from high breakthrough torque is to use the properly sharpened twist drills and reamers, and select a proper drill speed.             |      | ●     |        | Air Drill     |
| <b>13</b> | Start drilling at low speed and gradually increase power. Avoid kick-back by easing up at breakthrough.                                                               |      | ●     |        | Air Drill     |





**PROFESSIONAL PNEUMATIC TOOLS**